MyPBX

U5 series

Administrator's Guide

Version 14.17.0.30

Yeastar Technology Co., Ltd.

Table of Contents

1. Introduction 5
1.1 Features 6
1.2 Hardware Specifications 7
1.2.1 Exterior Appearance 7
2. System Setup 8
2.1 Connection Drawing 8
2.2 Connecting Ethernet Line 8
2.3 Supplying Power 8
3 Administrator Login 10
4 Status 12
4.1 Line status 12
4.1.1 Extension Status 12
4.1.2 Trunk Status 13
4.2 System Status 14
4.2.1 System Info 14
4.2.2 Network Status 15
5 System 16
5.1 Network Preferences 16
5.1.1 LAN Settings 16
5.1.2 WAN Settings 17
5.1.3 DHCP Server 19
5.1.4 VLAN Settings 19
5.1.5 VPN Settings 22
5.1.6 DDNS Settings 22
5.1.7 Static Route 23
5.2 Firewall Settings 24
5.2.1 Firewall Rules 25
5.2.2 IP blacklist 27
5.3 System Preference 28
5.3.1 Password Settings 28
5.3.2 Date and Time 29
5.3.3 Firmware Update 29
5.3.4 Hot Standby 30
5.3.5 Backup and Restore 32
5.3.6 Reset and Reboot 32
5.3.7 Alert Settings 33
5.4 Storage Management 36
5.4.1 Disk Management 36
5.4.2 External Storage 37
6 PBX 40
6.1 Extensions 40
6.1.1 FXS/VoIP Extensions 40

FXS Extensions 41
VoIP Extensions 45
6.1.2 Phone Provisioning 50
6.2 Trunks 59
6.2.1 Physical Trunk 59
6.2.2 VoIP Trunk 70
6.3 Outbound Call Control 76
6.3.1 Outbound Routes 76
6.3.2 Speed Dial Settings 79
6.4 Inbound Call Control 80
6.4.1 IVR 80
6.4.2 Ring Groups 82
6.4.3 Queues 84
6.4.4 Conferences 88
6.4.5 Inbound Routes 89
6.5 Audio Settings 93
6.5.1 Custom Prompts 93
6.5.2 Music on Hold Prompts 94
6.5.3 System Prompts Settings 95
6.6 Basic Settings 96
6.6.1 General Preferences 96
6.6.2 Business Hours 99
6.6.3 Feature Codes 100
6.6.4 Voicemail Settings 104
6.7 Advanced Settings 107
6.7.1 SIP Settings 107
6.7.2 IAX Settings 113
6.7.3 Blacklist 114
6.7.4 Callback Settings 115
6.7.5 DNIS Settings 117
6.7.6 DISA 117
6.7.5 PIN User Settings 118
6.7.8 Paging Groups 120
6.7.9 SMS Settings 121
7 Reports 124
7.1 Call Logs 124
7.2 System Logs 124
8 Logout 125
9. Use MyPBX 126
9.1 Make outbound call 126
9.1.1 Sample Routing via E1 Trunk 127
9.1.2 Sample Routing via VoIP Trunk 128
9.2 Incoming call 130
9.2.1 Sample Routing to an IVR 130

APPENDIX A FAQ 132
APPENDIX B MyPBX Security Configuration Guide 133
APPENDIX C How to Configure external storage 150
APPENDIX D How to Configure NAT setting 152
APPENDIX E How to Use Auto Provision 154
APPENDIX F How Do I Configure Distinctive Ring Tones 157
APPENDIX G How to Use Email to SMS 159
APPENDIX H How to Use DID 161
APPENDIX I How to Use BLF Key to Choose the PSTN line 165
APPENDIX J How to Enable Auto Recording 166
J.1 Login 166
J.2 Recording Settings 166
J.3 Recording Logs 167
J.4 Share setting 168
J.5 Password Setting 170

1. Introduction

MyPBX —IP-PBX for Medium Businesses/Home Office

New products MyPBX U5 series is a standalone embedded hybrid PBX for medium businesses and remote branch offices of larger organizations (1-100 users per site). MyPBX U5 series also offer a hybrid solution (a combination of VoIP applications using E1/T1/J1 equipment) alternative for enterprises who are not yet ready to migrate to a complete VoIP solution.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radiofrequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

FCC Warning

This equipment has been tested and found to comply with the regulations for a Class B digital device, pursuant to Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received including interference that may cause undesired operation.

1.1 Features

• Auto-provision	• Follow me
• Optional Hard disk	• Interactive Voice Response (IVR)
• BLF Support	• Intercom / Zone Intercom
• Blacklist	• Music On Hold
• Call transfer	• Hot standby
• Call Detail Records(CDR)	• Paging / Zone Paging
• Call Forward	• PIN Users
• Call Parking	• Queue
• Call Recording	• QOS
• Call Pickup	• Ring Group
• Call Routing	• Route by Caller ID
• Call Transfer	• Spy functions
• Call Waiting	• Skype Integration (Skype Connect)
• Caller ID	• Three-way Calling
• Call Back	• Mobility Extension
• Conference	• External Storage
• Speed Dial	• DDNS
• Define Office Time	• OpenVPN
• Direct Inward System Access(DISA)	• T.38
• DIDs	• Voicemail
• Distinctive Ringtone	• VLAN
• Do Not Disturb(DND)	• WAN
• Dial by Name	• PPPoE
• Firewalls	• Static Route

More info,
MyPBX U500: http://www.yeastar.com/products/MyPBX-U500.asp
MyPBX U510: http://www.yeastar.com/products/MyPBX-U510.asp
MyPBX U520: http://www.yeastar.com/Products/MyPBX-U520.asp

1.2 Hardware Specifications

1.2.1 Exterior Appearance

Front Panel

Figure 1-1 MyPBX U5XX Front Panel

No.	Indication
①	16 Green LEDs
②	16 RJ11 ports
③ ④	E1/T1 interface None E1/T1 available in MyPBX U500 1*E1/T1 available in MyPBX U510 2*E1/T1 available in MyPBX U520
⑤	Console port (RJ45)
⑥	WAN port
⑦	LAN port
⑧	USB port
⑨	Reset Button
⑩	Power and Run indicator

2. System Setup

2.1 Connection Drawing

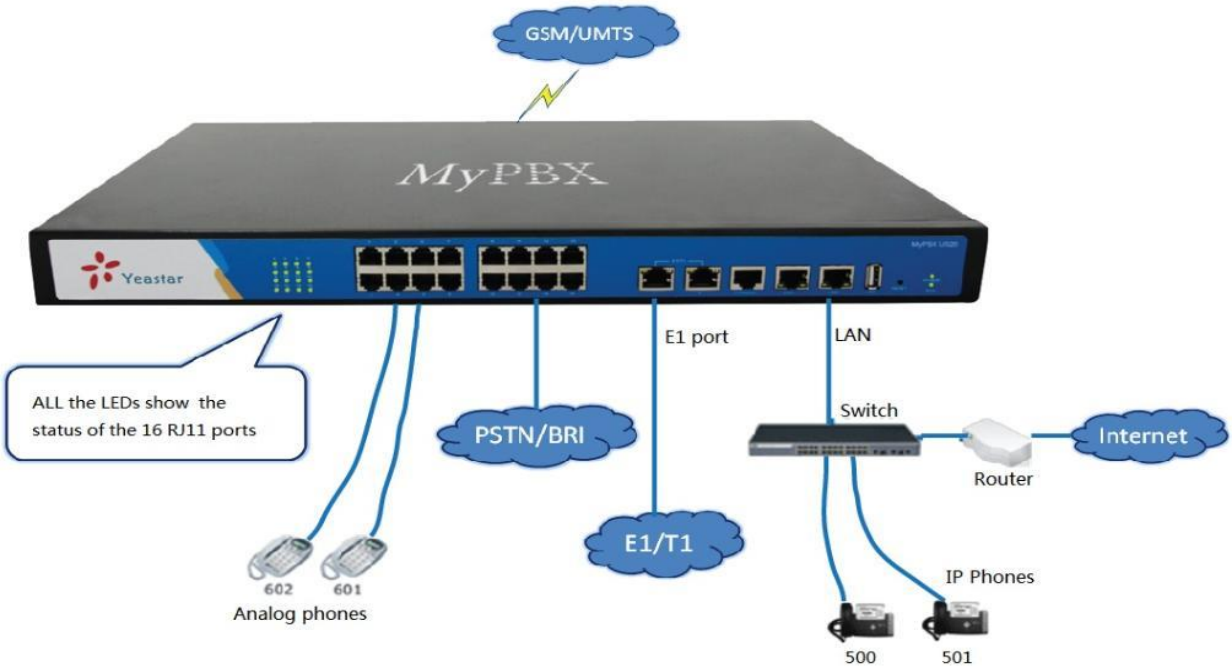

Figure 2-1

2.2 Connecting Ethernet Line

MyPBX provides two 1000M Ethernet ports with RJ45 interface and LED indicator. Plug Ethernet line into MyPBX's Ethernet port, and then connect the other end of the Ethernet line with a hub, switch, router, LAN or WAN. Once connected, check the status of the LED indicator. A yellow LED indicates the port is in the connection process, and a green LED indicates the port is properly connected.

2.3 Supplying Power

Please follow the steps below to connect the MyPBX unit to a power outlet:

1. Connect the small end of the power cable to the power input port on the

MyPBX back panel, and plug the other end of the cable into a 100V~240V AC power outlet.

2. Check the Power LED on the front panel. A solid green LED indicates that power is being supplied correctly.

3 Administrator Login

From your web browser, input the IP address of the MyPBX server.
If this is the first time you are configuring MyPBX, please use the default settings as below (your PC should be in the same local network with MyPBX):
IP Address: http://192.168.5.150

Note: MyPBX supports multiple administrators in hierarchical mode (Administrator, General Manager, CDR Manager)

·Administrator

have all authority .
Username: admin , Password: password

·General Manager

have basic authority; without the advanced authority to create VoIP trunks, reset, update, backup and restore MyPBX.
Username: user , Password: password

·CDR Manager

only have the authority to check the call recordings.
Username: cdr , Password: password

In this example, the IP address is 192.168.5.166

Figure 3-1

This is the welcome page of MyPBX U5XX after successful login.

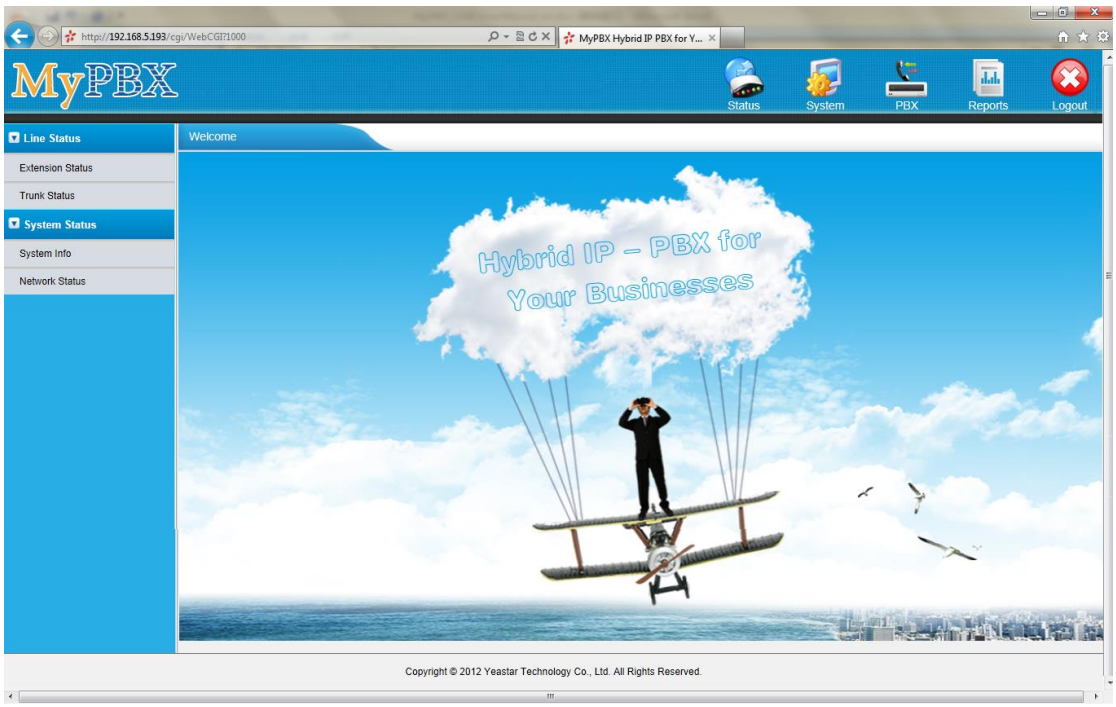
MyPBX
Status
System
PBX
Reports
Logout
Line Status
Extension Status
Trunk Status
System Status
System Info
Network Status
Welcome
Hybrid IP – PBX for
Your Businesses
Copyright © 2012 Yeastar Technology Co., Ltd. All Rights Reserved.

Figure 3-2

4 Status

Click

to start to check the status of MyPBX U5XX, where we can check the status of extension, trunk, and network and system information.

4.1 Line status

In this page, we can check the status of extension and trunks

4.1.1 Extension Status

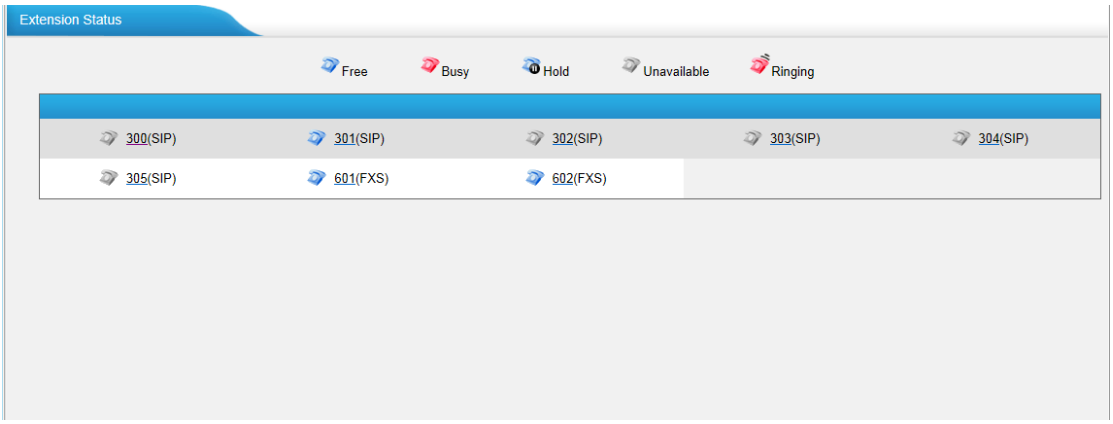

Figure 4-1

MyPBX Status Description:

Extensions:

1) : Extension is unavailable

2) : Extension is idle

3） : Extension is ringing

4） : Extension is busy

5） : Extension is on hold

4.1.2 Trunk Status

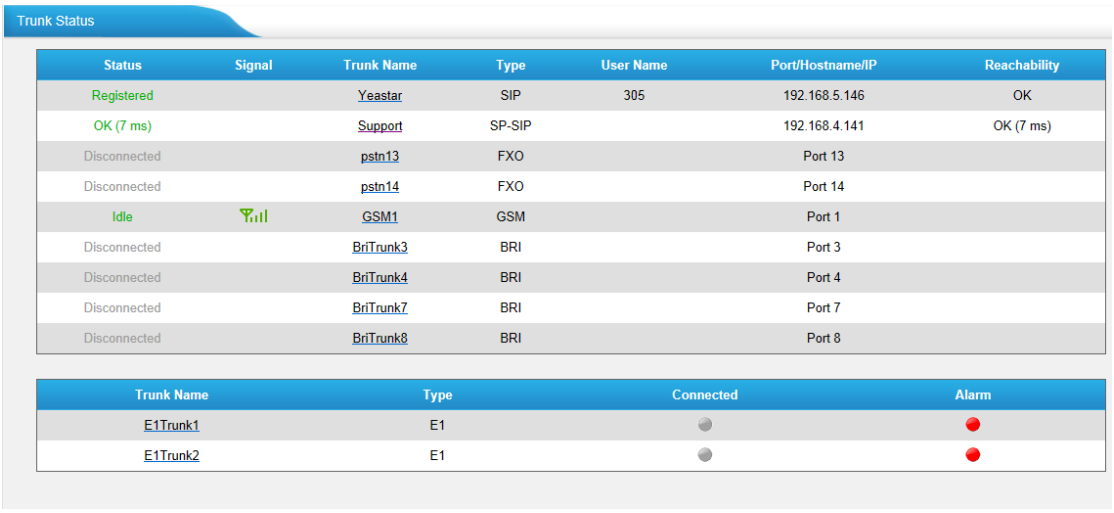

Figure 4-2

Trunks:

Note:
E1/T1/J1 trunk in MyPBX U5XX

	MyPBX U500	MyPBX U510	MyPBX U520
number of E1/T1/J1	0	1	2

VOIP Trunk:

Status

Unregistered: Trunk registration failed.

Registered: Successful registration, trunk is ready for use.

Request Send: Registering.

Waiting: Waiting for authentication.

Service Provider:

Status

OK: Successful registration, trunk is ready for use.

Unreachable: The trunk is unreachable.

Failed: Trunk registration failed.

FXO Trunk:

Status

Idle: The port is idle.

Busy: The port is in use.

Disconnected: The port hasn't connected to the PSTN line.

More detail message, please refer to the LED indication of front panel.

GSM Trunk:

Status

Idle: The port is idle.

Busy: The port is in use.

Signal

: No signal.

: Poor.

: Average.

: Good.

: Excellent.

BRI Trunk:

Status

Ok: The ports connect correctly.

Disconnected: The port hasn't connected to the BRI line

E1 Trunk:

Connect	Alarm	Comment
		The port doesn't have E1 line connected.
		E1 line has been connected to the port; PRI is in corresponding or can't communicate.
		Succeed.

4.2 System Status

In this page, we can check the status of MyPBX system, including the hardware ,firmware version and the network status of LAN and WAN ports .

4.2.1 System Info

In this page, we can check the hardware/firmware version, or the disk usage of MyPBX.

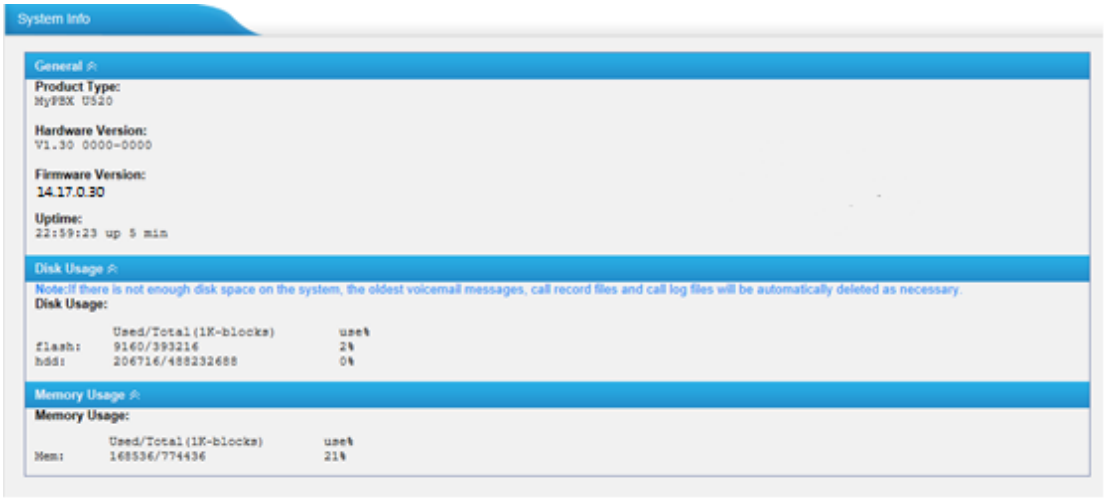

Figure 4-3

4.2.2 Network Status

In this page, the IP address of LAN and WAN port will appear, if OpenVPN and Vlan are configured well, they will be display here too.

Figure 4-4

5 System

Click

to access.

In this page, we can configure the network settings, firewall settings, storage management and some other preferences like firmware update and hot standby.

5.1 Network Preferences

5.1.1 LAN Settings

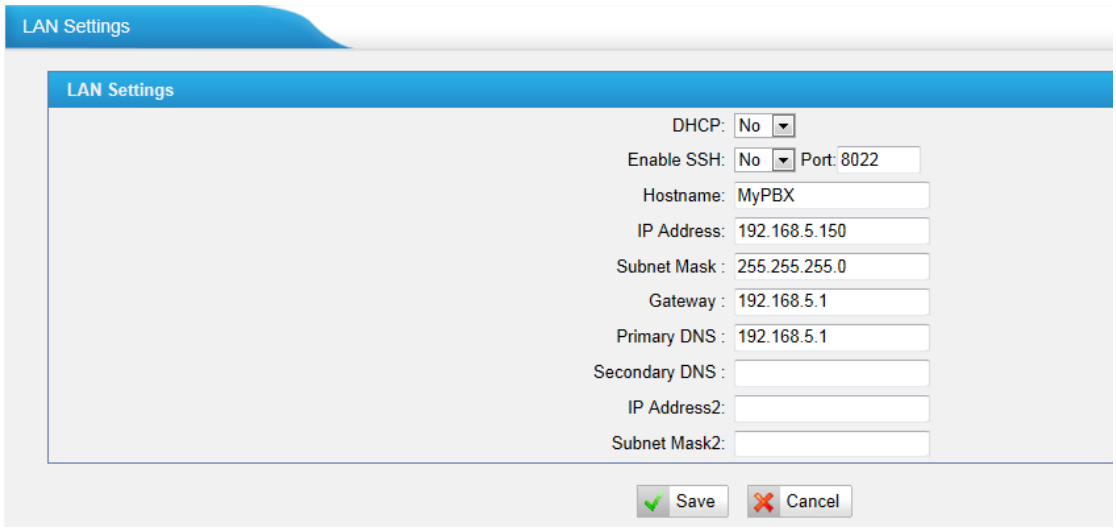

Figure 5-1

·DHCP

If this option is set, MyPBX will use DHCP to get an available IP address from your local network. Not recommended or you cannot access MyPBX without the right IP address

·Enable SSH

This is the advance way to access the device, you can use the putty software to access the device. In the SSH access, you can do more advance setting and debug. Disabled by default.

·**Port**: the default is 8022, you change it to another one

·**Hostname**
Set the host name for MyPBX.

·**IP Address**
Set the IP Address for MyPBX.
Recommend to configure a static IP address for MyPBX

·**Subnet Mask**
Set the subnet mask for MyPBX.

·**Gateway**
Set the gateway for MyPBX.

·**Primary DNS**
Set the primary DNS for MyPBX.

·**Secondary DNS**
Set the secondary DNS for MyPBX.

·**IP Address2**
Set the second IP Address for MyPBX.

·**Subnet Mask2**
Set the second subnet mask for MyPBX.

5.1.2 WAN Settings

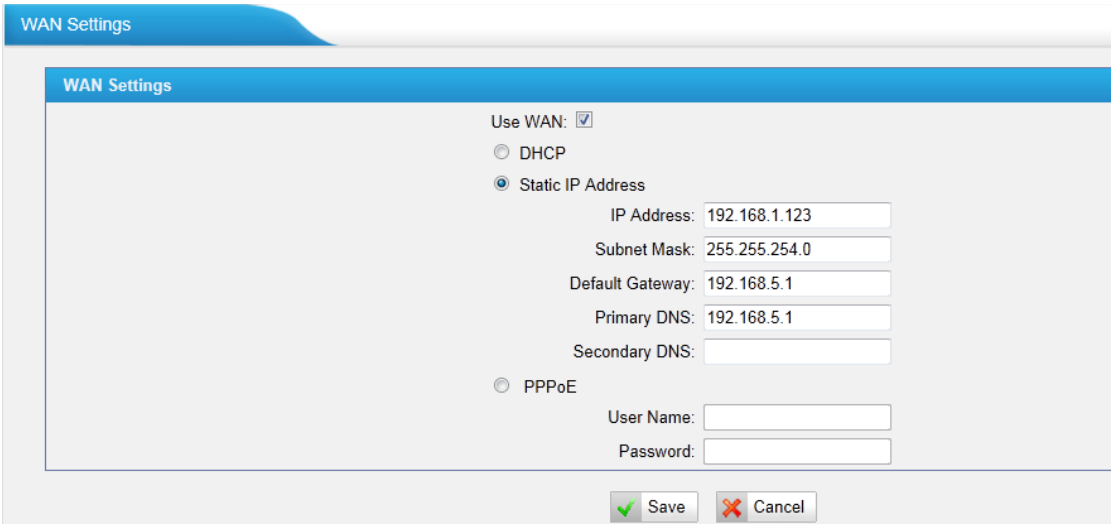

Figure 5-2

It support three connection types: DHCP (obtain an IP automatically), PPPoE, Static IP Address.

Note:

1. WAN port is disabled by default
2. WAN port cannot be used as a router to route the internet packages from WAN port to LAN port.

·DHCP

.If your ISP says that you are connecting through DHCP or a dynamic IP address from your ISP, perform these steps:

Step1: Select **DHCP** as the WAN Connection Type.
Step2: Click **Save** button to save the settings.
Step3: Reboot the device.
Step4: Check the WAN's Status (Status → Network status).

·Static IP Address

If your ISP says that you are connecting through a static or fixed IP address from your ISP, perform these steps:

Step1: Select **Static IP Address** as the WAN Connection Type.
Step2: Enter the IP Address.
Step3: Enter the Subnet Mask.
Step4: Enter the Gateway Address.
Step5: Enter the Primary DNS and Secondary DNS.
Step6: Click the **Save** button to save the settings.
Step7: Reboot the device.
Step8: Check the WAN's Status (Status → Network status).

·PPPoE

If your DSL provider says that you are connecting through PPPoE or if you normally enter a user name and password to access the Internet, perform these steps:

Step1: Select **PPPoE** as the WAN Connection Type.
Step2: Enter the User Name.
Step3: Enter the Password.
Step4: Click the **Save** button to save the settings.
Step5: Reboot the device.
Step6: Check the WAN's Status (Status → Network status)

5.1.3 DHCP Server

Dynamic Host Configuration Protocol (DHCP) is a network protocol that enables a server to automatically assign an IP address to a computer from a defined range of numbers (i.e., a scope) configured for a given network. You can set a local network NTP server for MyPBX here too

Note1: When using 'Phone Provisioning' for Grandstream IP phone, Enter the IP address of the server directly, e.g.:192.168.5.150; for other phones using the default configuration.
Note2: MyPBX U5XX can be working as a DHCP server, but cannot be regarded as an router.

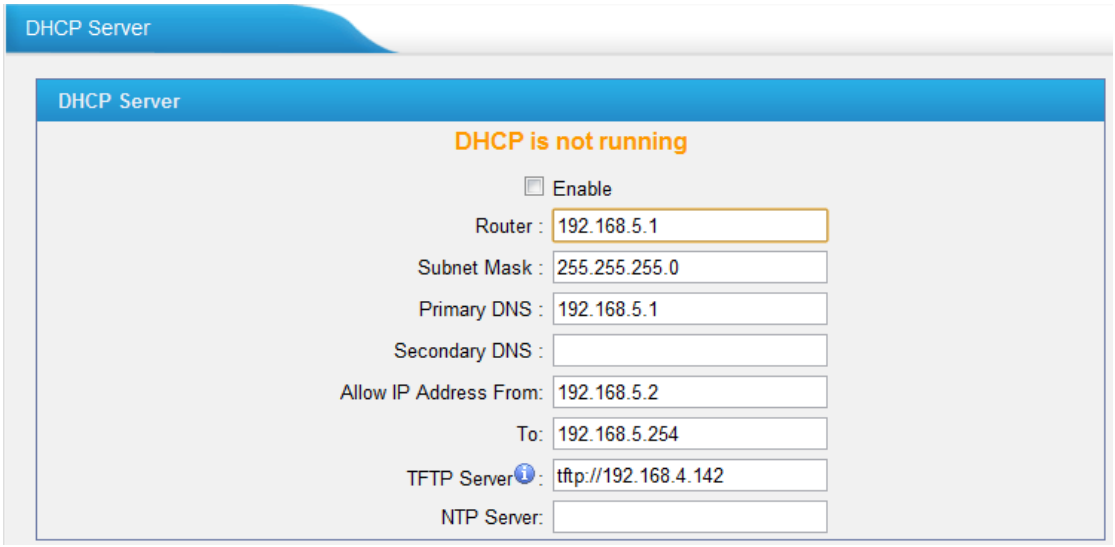

Figure 5-3

5.1.4 VLAN Settings

A VLAN(Virtual LAN) is a logical local area network (or LAN) that extends beyond a single traditional LAN to a group of LAN segments, given specific configurations.

Note: MyPBX U5XX is not the VLAN server, a 3-layer switch is still needed, please configure the VLAN information there first, then input the details in MyPBX, so that the packages via MyPBX will be added the VLAN label before sending to that switch.

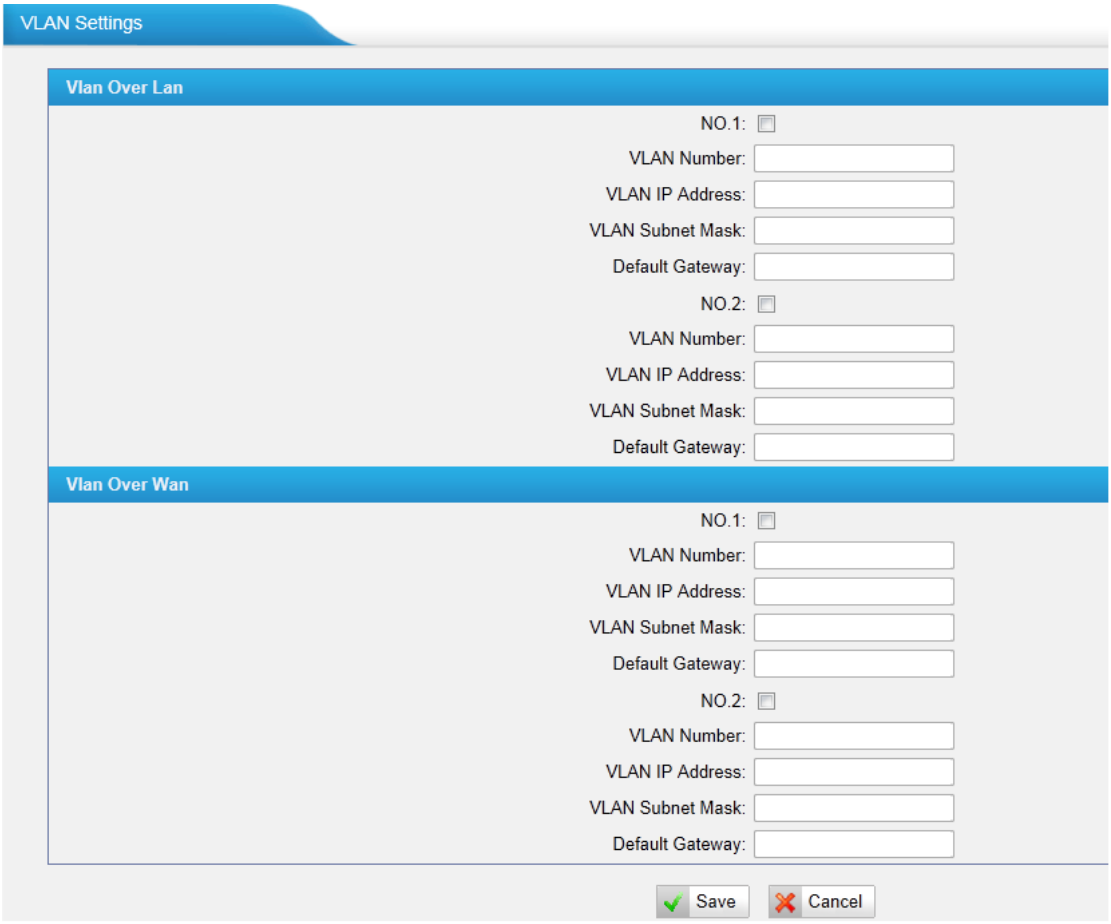

Figure 5-4

1) VLAN Over Lan

·NO.1

Click the NO.1 you can edit the first VLAN over Lan.

·VLAN Number

.The VLAN Number is a unique value you assign to each VLAN on a single device.

·VLAN IP Address

Set the IP Address for MyPBX VLAN over Lan.

·VLAN Subnet Mask

Set the Subnet Mask for MyPBX VLAN over Lan.

·Default Gateway

Set the Default Gateway for MyPBX VLAN over Lan

·NO.2

Click the NO.2 you can edit the first VLAN over Lan.

·VLAN Number
.The VLAN Number is a unique value you assign to each VLAN on a single device.

·VLAN IP Address
Set the IP Address for MyPBX VLAN over Lan.

·VLAN Subnet Mask
Set the Subnet Mask for MyPBX VLAN over Lan.

·Default Gateway
Set the Default Gateway for MyPBX VLAN over Lan.

2) VLAN Over Wan

·NO.1
Click the NO.1 you can edit the first VLAN over Wan.

·VLAN Number
.The VLAN Number is a unique value you assign to each VLAN on a single device.

·VLAN IP Address
Set the IP Address for MyPBX VLAN over Wan.

·VLAN Subnet Mask
Set the Subnet Mask for MyPBX VLAN over Wan.

·Default Gateway
Set the Default Gateway for MyPBX VLAN over Wan.

·NO.2
Click the NO.2 you can edit the first VLAN over Wan.

·VLAN Number
.The VLAN Number is a unique value you assign to each VLAN on a single device.

·VLAN IP Address
Set the IP Address for MyPBX VLAN over Wan.

·VLAN Subnet Mask
Set the Subnet Mask for MyPBX VLAN over Wan.

·Default Gateway
Set the Default Gateway for MyPBX VLAN over Wan.

5.1.5 VPN Settings

A virtual private network (VPN) is a method of computer networking--typically using the public internet--that allows users to privately share information between remote locations, or between a remote location and a business' home network. A VPN can provide secure information transport by authenticating users, and encrypting data to prevent unauthorized persons from reading the information transmitted. The VPN can be used to send any kind of network traffic securely. MyPBX supports OpenVPN.

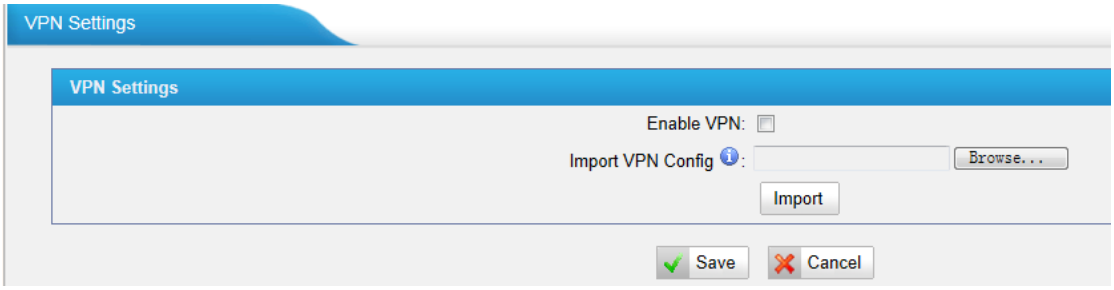

Figure 5-5

·Enable VPN

·Import VPN Config
Import configuration file of OpenVPN.

Note: Don't configure 'user' and 'group' in the 'config' file.
You can get the config package from the OpenVPN provider.

5.1.6 DDNS Settings

DDNS(Dynamic DNS) is a method / protocol / network service that provides the capability for a networked device, such as a router or computer system using the Internet Protocol Suite, to notify a Domain Name System (DNS) name server to change, in real time, the active DNS configuration of its configured hostnames, addresses or other information.

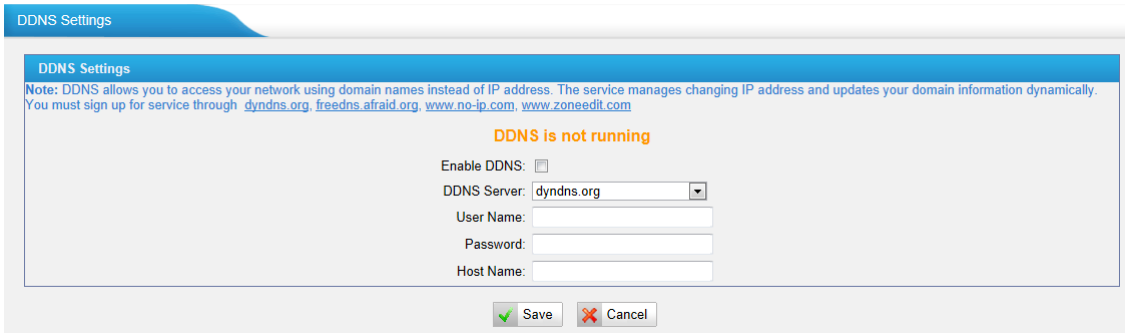

Figure 5-6

·Enable DDNS

·DDNS Server

Select the DDNS server you sign up for service.

·User Name

User name the DDNS server provides you.

·Password

User account's password .

·Host Name

Note: DDNS allows you to access your network using domain names instead of IP address. The service manages changing IP address and updates your domain information dynamically. You must sign up for service through dyndns.org, freedns.afraid.org, www.no-ip.com, www.zoneedit.com

5.1.7 Static Route

MyPBX will have more than one internet connection in some situations but it has only one default gateway. You will need to set some Static Route for MyPBX to force it goes out through different gateway when access to different internet. The default gateway priority of MyPBX from high to low is OpenVPN→WAN port→LAN port.

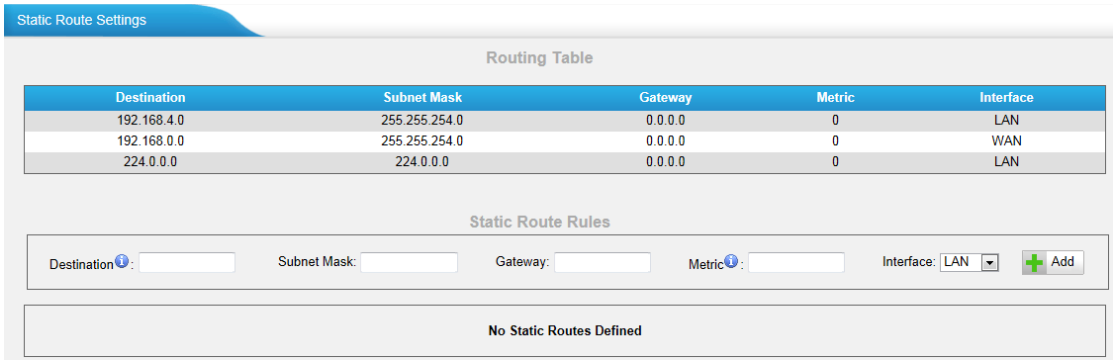

Figure 5-7

1) Route table
The current route rules of MyPBX

·Destination
The destination network to be accessed to by MyPBX

·Subnet Mask
Specify the destination network portion.

·Gateway
Define which gateway MyPBX will go through when access to the destination network.

·Metric
The cost of a route is calculated by using what are called routing metric. Routing metrics are assigned to routes by routing protocols to provide measurable statistic which can be used to judge how useful (how low cost) a route is.

·Interface
Define which internet port to go through.

2) Static Route Rules
You can add new static route rules here.

5.2 Firewall Settings

Firewalls are used to prevent unauthorized Internet users from accessing private networks connected to the Internet, especially intranets. All messages entering or leaving the intranet pass through the firewall, which examines each message and blocks those that do not meet the specified security criteria.
In order to ensure the safe operation of the system, we suggest to enable and configure firewall. More detailed configuration and other safety related configuration, please refer to **APPENDIX B MyPBX Security Configuration Guide**.

5.2.1 Firewall Rules

Figure 5-8

1) General Settings

·Enable Firewall

Enable the firewall to protect the device. You should reboot the device to make the firewall run successfully.

·Disable Ping

Enable this item, net ping from remote hosts will be dropped.

·Drop All

When you enable 'Drop All' feature, system will drop all packets or connection from other hosts if there are no other rules defined. To avoid locking the devices, at least one 'TCP' accept common rule must be created for port used for SSH access, port used for HTTP access and port sued for CGI access.

2) Common Rules

There is not any default rules inside, you can create them as required.

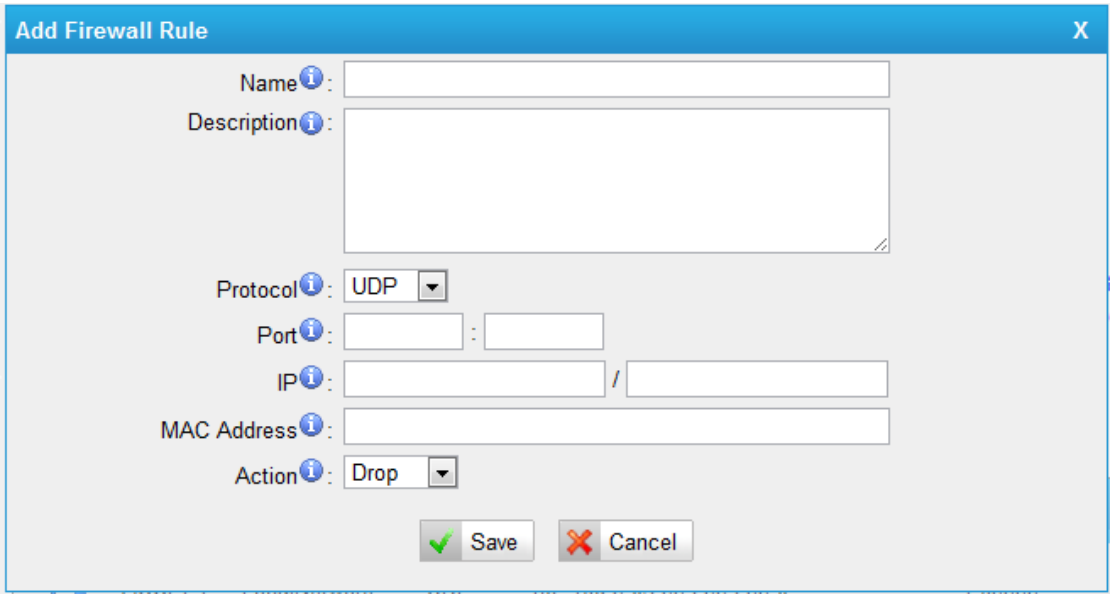

Figure 5-9

·Name
A name for this rule , e.g. 'HTTP'.

·Description
Simple description for this rule . E.g.: Accept the specific host to access the web interface for configuration.

·Protocol
The protocols for this rule .

·Port
Initial port should be on the left and end port should be on the right.
The end port must be equal to or greater than start port.

·IP
The IP address for this rule . The format of IP address is: IP/mask
Ex: 192.168.5.100/255.255.255.255 for IP 192.168.5.100
Ex: 216.207.245.47/255.255.255.255 for IP 216.207.245.47
Ex:192.168.5.0/255.255.255.0 for IP from 192.168.5.0 to 192.168.5.255 .

·MAC Address
The format of MAC Address is XX:XX:XX:XX:XX:XX, X means 0~9 or A~F in hex, the A~F are not case sensitive.

Note: The MAC address will be changed when it's remotely device, so it will not be working to filter using MAC for remote devices.

·Action

Accept: Accept the access from remote hosts.
Drop: Drop the access from remote hosts.
Ignore: Ignore the access.

5.2.2 IP blacklist

You can set some packets accept speed rules here. When a IP address which hasn't been accepted in common rules sends packets faster than the allowed speed, it will be set as black IP address and blocked automatically.

Figure 5-10

1) Blacklist rules

We can add the rules for IP blacklist rate as your demand

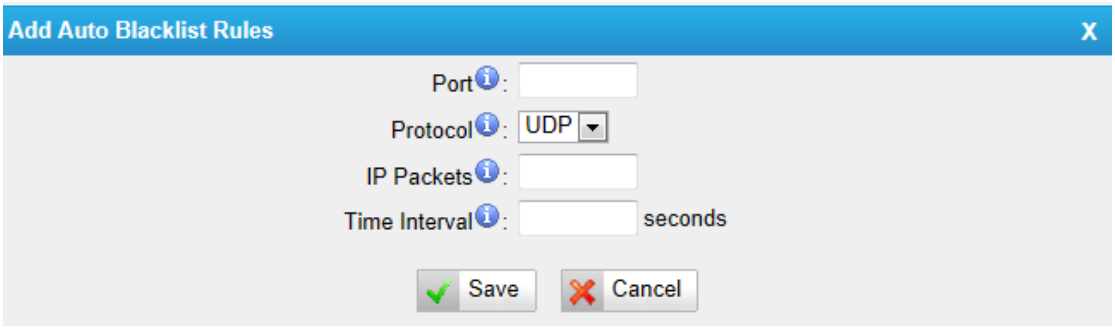

Figure 5-11

·Port

Auto defense port

·Protocol

Auto defense protocol. TCP or UDP.

·IP Packets

Allowed IP packets number in the specific time interval.

·Time interval

The time interval to receive IP packets. For example, IP packets 90,time interval 60 means 90 IP packets are allowed in 60 seconds.

2) IP blacklist
The blocked IP address will display here, you can edit or delete it as your wish.

5.3 System Preference

In this page, we can set other system preference, like the password for admin account, system date and time, firmware update, hot standby, backup and restore, reset and reboot.

5.3.1 Password Settings

1) Change Password

·User
MyPBX support 3 levels users, choose one of them to change its password.

·Enter Old Password
The default password is '**password**'.

·Enter New Password

·Retype New Password
To change the password, enter the new password and click update. The system will then prompt you re-login using your new password.

2) CDR Setting
Whether enable CDR User.

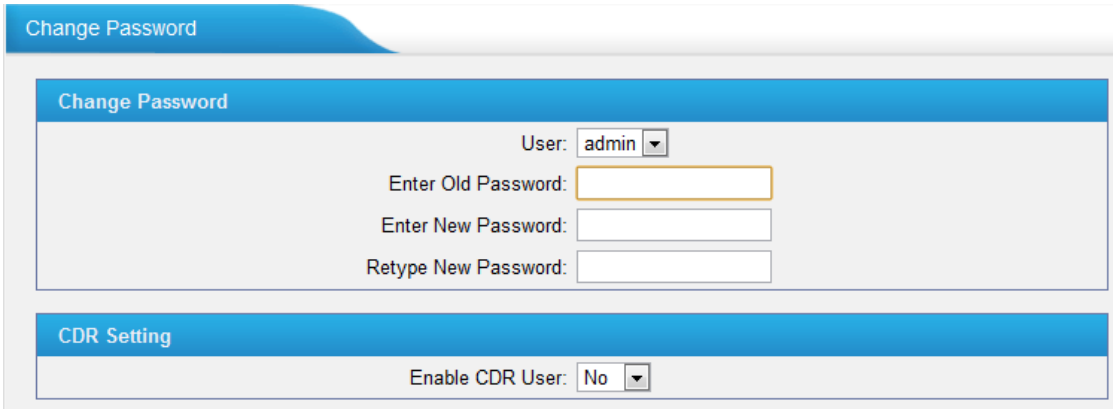

Figure 5-12

5.3.2 Date and Time

Set the date and time for MyPBX.

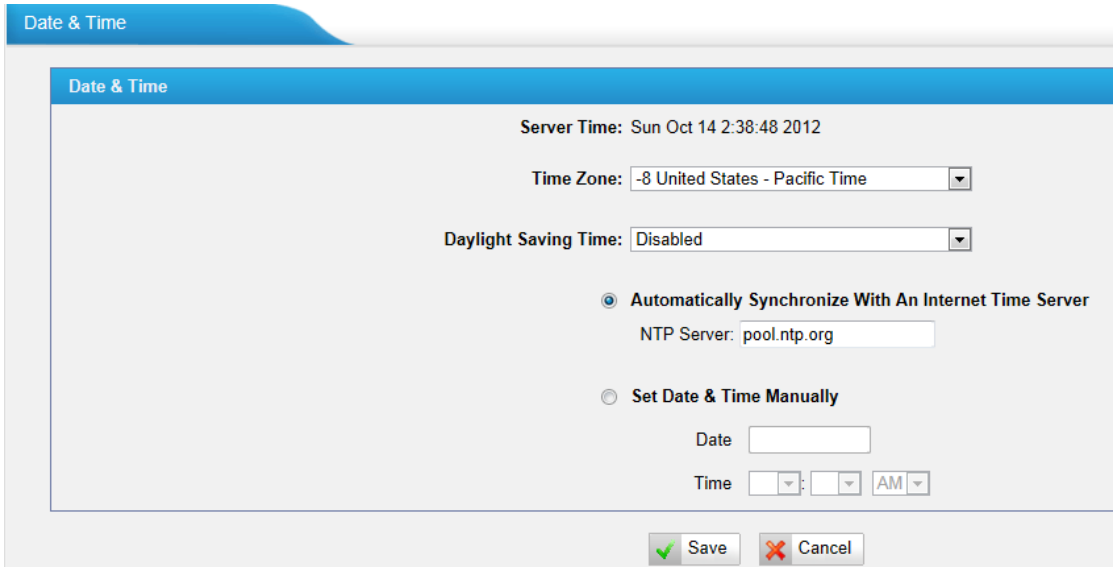

Figure 5-13

·Time Zone
You can choose your time zone here.

·Daylight Saving Time
Set the mode to Automatic or disabled

·Automatically Synchronize With an Internet Time Server
Input the NTP server so that MyPBX will update the time automatically

·Set Date & Time Manually
You can set the time to your local right time manually here

5.3.3 Firmware Update

Upgrading of the firmware is possible through the Administrator web interface using a TFTP Server or an HTTP URL.
Enter your TFTP Server IP address and firmware file location, then click start to update the firmware

Note:
1. If enabled 'Reset configuration to Factory Defaults', System will restore to factory default settings.
2. When update the firmware, please don't turn off the power. Or the system will get damaged.

3. More information for the steps to update the firmware, please refer to this link: http://www.yeastar.com/download/MyPBX-U5XX/MyPBX_U5XX_FirmwareUpgrade_en.pdf

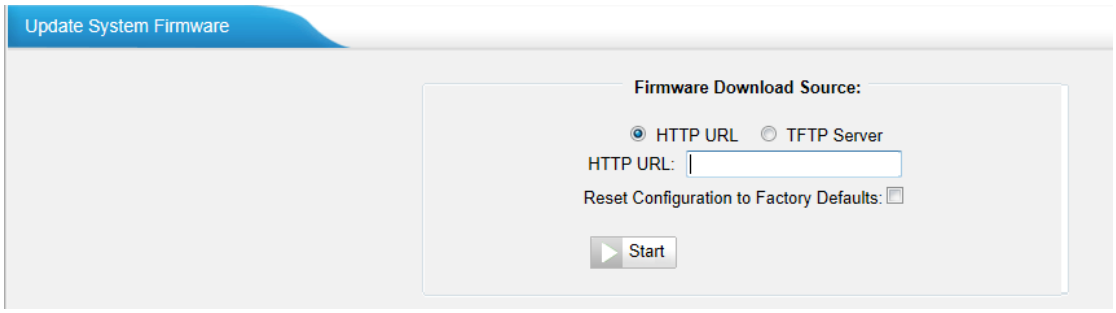

Figure 5-14

5.3.4 Hot Standby

Redundancy is achieved by using duplicate hardware and software installations and synchronizing data and operating state. Redundancy assures smooth operation even if a system goes down. Essentially a duplicate backup system takes over with virtual no loss of service. This technique assures absolute reliability no matter what failure occurs. In mission critical installations, redundancy is a way to address possibility of any failure.

Note 1: Before enabling the Host Standby feature, please make sure that the two servers in the failover pair are the same model, own the same modules installed in the same slots, the same hardware configurations and firmware version.

Note 2: Please configure the primary server first and configure the secondary server only after the running status of primary server becomes "active".

Note 3: The virtual IP address inputted in this page will be the one used for registering in each IP phone.

Note 4: Before configuring the Email list in this page, please configure the 'voicemail settings' in "PBX→Basic settings", and make sure the SMTP test successfully.

Note 5: Before configure the SMS list, please make sure the SIM and GSM/UMTS modules are installed well

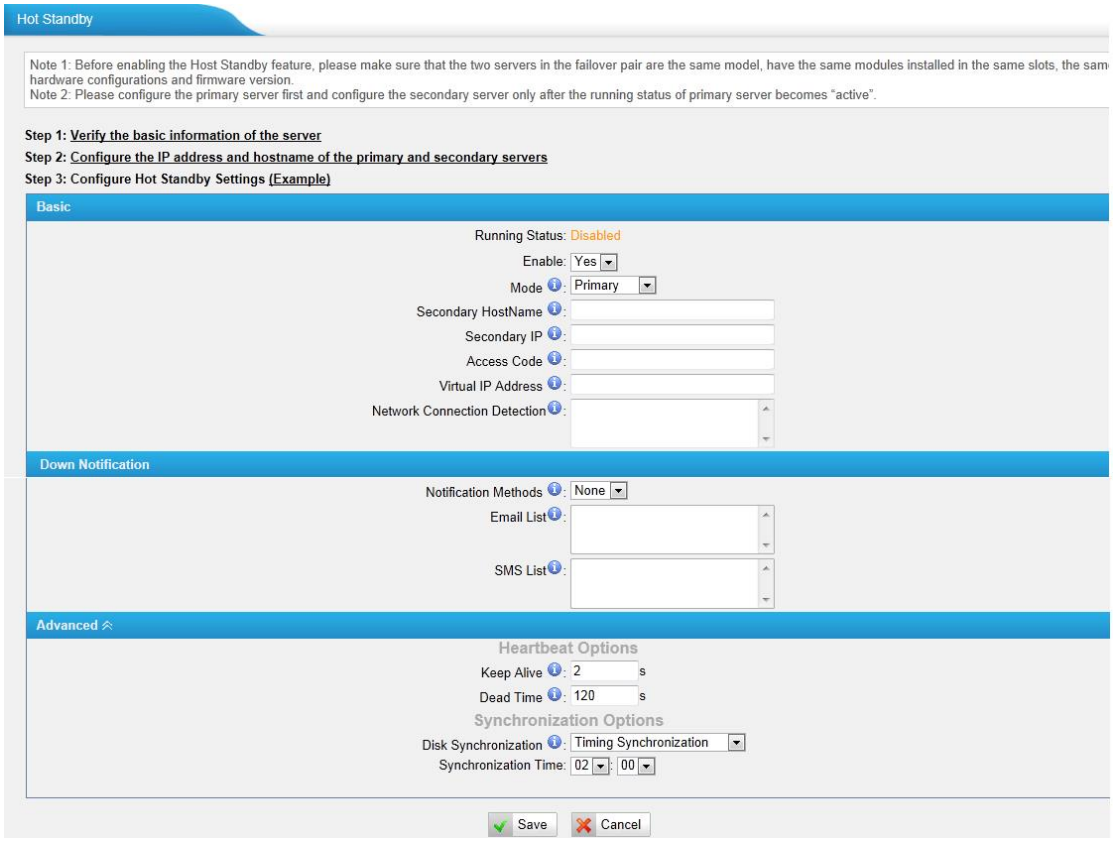

Figure 5-15

Mode: Primary means the main unit; Secondary means the standby unit;

Secondary/Primary Hostname: If this unit mode is primary, then you need to input the hostname of standby unit; vise versa, if this unit is selected as secondary, then the hostname of primary unit is required. In brief, you need to input each other's host name on this field.

IP: You need to input each other's IP address on this field.

Access code: To make an identification number to verify each other. The number must be the same to both units.

Virtual IP address: To fill in a virtual IP address includes mask, which is always points to the currently activated unit. Customer can register IP phones through this virtual IP address. Please make sure the virtual IP add includes mask is the same on both units but different from their former IP address.

Network Connection Detection: Generally it requires the IP address of the router or gateway that connects both units. MyPBX will connect another unit through this IP address.

Down Notification: The way of informing customer that the system down.

Keep Alive: Every 2 seconds, a package will be sent from one unit to another, which can test whether they are working properly.

Dead Time: The default setting is 120 seconds. If there's no response within 120s after one receiving a package from the other, then the normal working unit will figure the other unit is dead and send an email or SMS to report the failure.

Disk Synchronization: It works for synchronizing the data on hard disk only,

such as the call recording files and CDR files saved in disk. The configurations in MyPBX will not be influenced by this feature. Two options are available: timing synchronization and real-time synchronization.

5.3.5 Backup and Restore

We can backup up the configurations before reset MyPBX U5XX to factory defaults, and then restore it using this package.

Note1: Only configurations, custom prompts will be backed up, the voicemail and recording files are not included.
Note2: When you have updated the firmware version, it's not recommended to restore using old package.

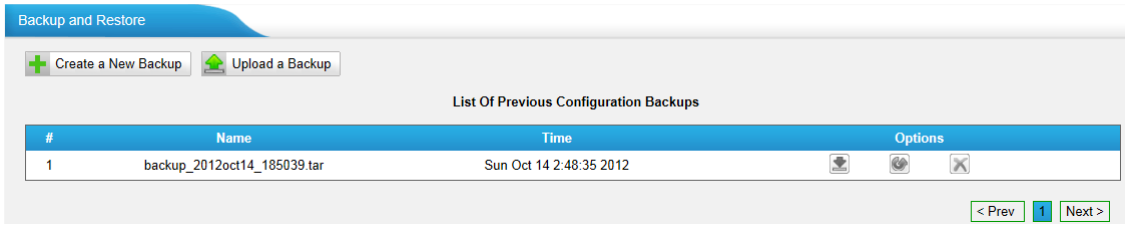

Figure 5-16

5.3.6 Reset and Reboot

We can reset or reboot MyPBX U5XX via web directly in this page.

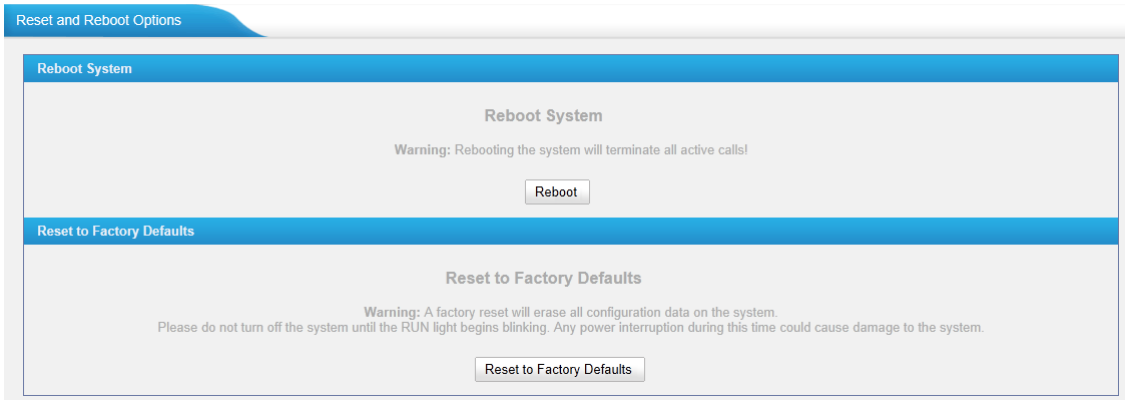

Figure 5-17

·Reboot System
Warning: Rebooting the system will terminate all active calls!

·Reset to Factory Defaults
Warning: A factory reset will erase all configuration data on the system. Please do not turn off the system until the RUN light begins blinking. Any power

interruption during this time could cause damage to the system.

5.3.7 Alert Settings

If the device is attacked, the system will notify users the alert via call or E-mail. The attack modes include IP attack and Web Login.
More details for the system security configuration, please refer to **APPENDIX B MyPBX Security Configuration Guide**.

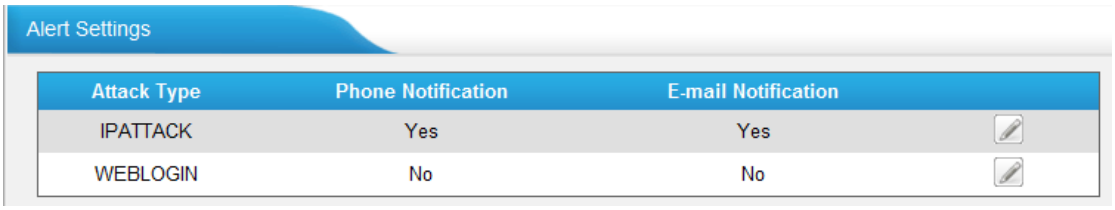

Figure 5-18

1.IPATTACK
When the system is attacked by IP address, the firewall will add the IP to auto IP Blacklist and notify the user if it match the protection rule.

1）Phone Notification Settings

·PHONE Notification
Whether enable phone notification.

·Number
The numbers could be set for alert notification, users can setup multiple extension and outbound phone numbers. Please separate them by ';'.
e.g. '500;9911', if the extension has configured Follow Me Settings, the call would go to the forwarded number directly.

·Attmtpts
The attempts to dial a phone number when there is no answer.

·Interval
The interval between each attempt to dial the phone number. Must be greater than 3 seconds, the default value is 10 seconds.

·Prompt
Users will hear the prompt while receiving the phone notification.

2）E-mail Notification Settings

Note: Please ensure that all voicemail settings are properly configured on the System Settings -> Voicemail Settings page before using this feature.

·E-mail Notification
Whether enable E-mail Notification

·Recipient' Name
The recipients for the alert notification, and multiple email addresses are allowed, please separate them by ';'. e.g. '500；9911' .

·Subject
The subject of the alert email.

·Email Content
Text content support for predefined variables. Variable names and corresponding instructions are as follows:

$(HOSTNAME) Host name
$(LOCALIP) Local IP address
$(SOURCEIP) Attack source IP address
$(DATETIME) Occurred
$(USERNAME) User name（WEBLOGIN effective）
$(DESTMAC) Attacks destination MAC（IPATTACK effective）
$(DESTPORT) Attacks destination Port number（IPATTACK effective）
$(PROTOCOL) Protocol type（IPATTACK effective）
$(INTERFACE) Network interface name（IPATTACK effective）

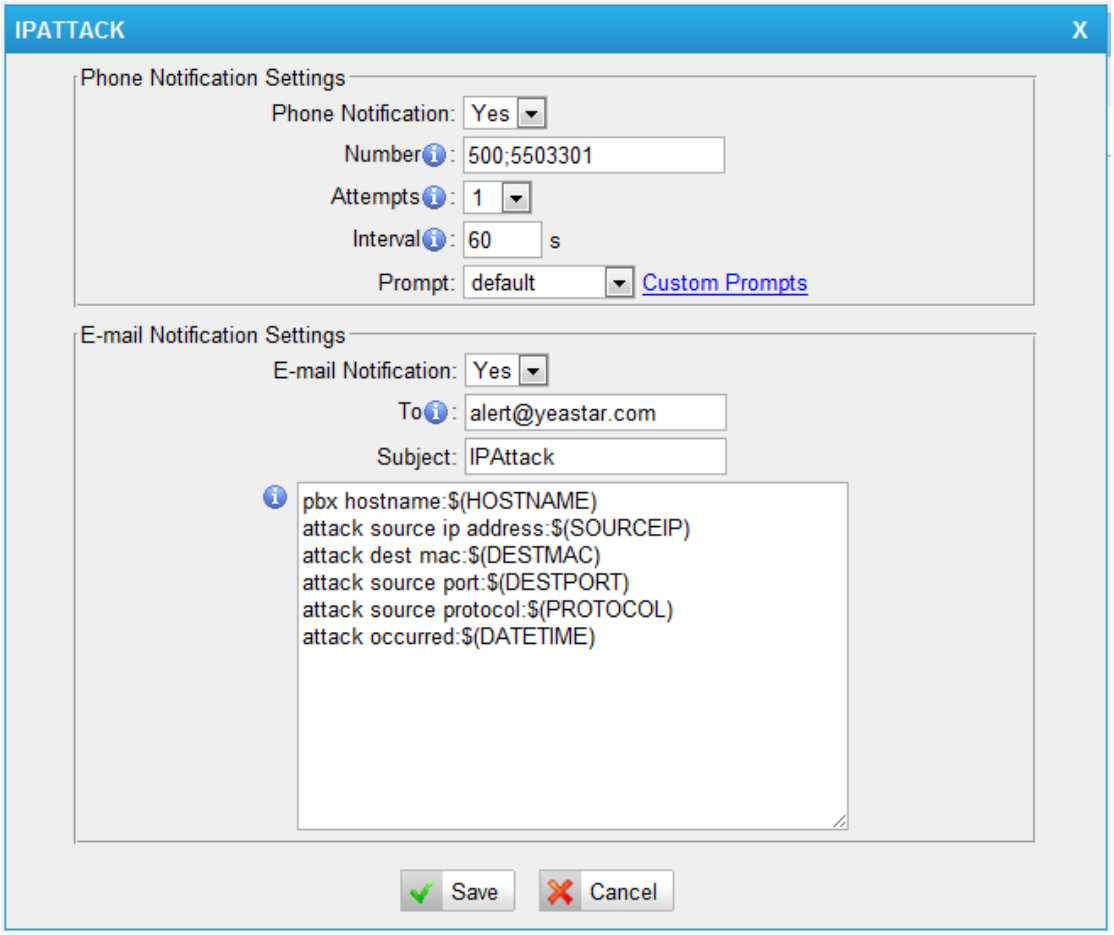

Figure 5-19

2.WEBLOGIN

Web Login Alert Notification：Enter the password incorrectly five times to login MyPBX Web interface will be as attack, the system will limit the IP login within 10 minutes and notify the user.

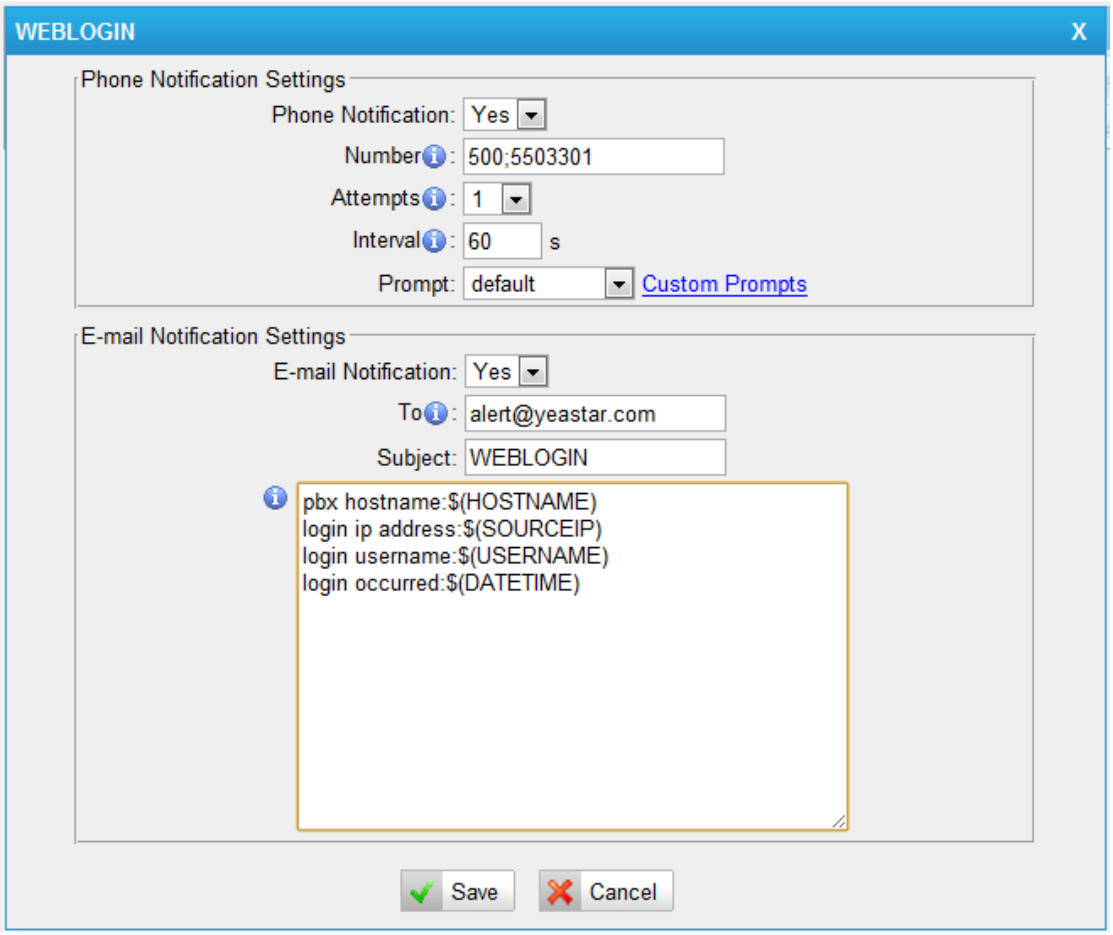

Figure 5-20

5.4 Storage Management

5.4.1 Disk Management

You can check the information of the hard disk, manage the disk and do some related configuration.

·Device Information
It's the information of the hard disk.

·Disk Management
You can format disk or clean up the disk here.
Note: Please check if you need to back up these files before formatting or clearing up the hard disk. Don't power off the device during the period.

·Other Settings

You can:

a. Save Voicemails in the Disk

b. Save One Touch Recording Files in the Disk

c. Save CDR in the Disk

If you want to enable auto recording, please refer to ***Appendix I***

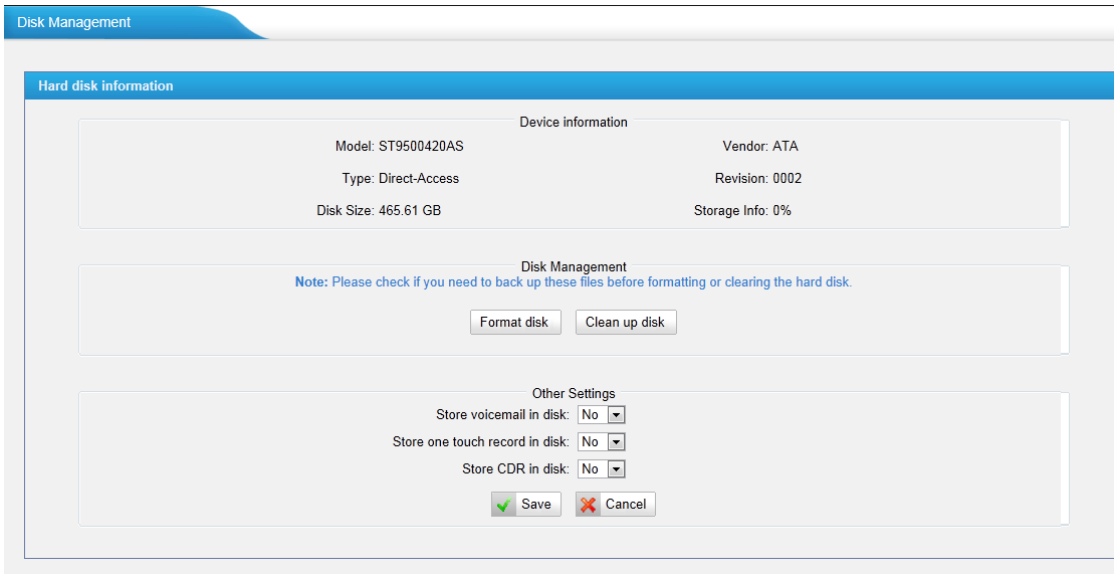

Figure 5-18

5.4.2 External Storage

The External Storage feature is used to extend storage space. Once configured, the files (voicemail, call recording files) created before the configured days will be moved to the Net-Disk.

Note: The shared folder must be based on Windows operation system.

Before external storage can be properly configured, an SMB share folder accessible from MyPBX must be set up on a Windows based machine. Once that has been set up, please follow the steps below.

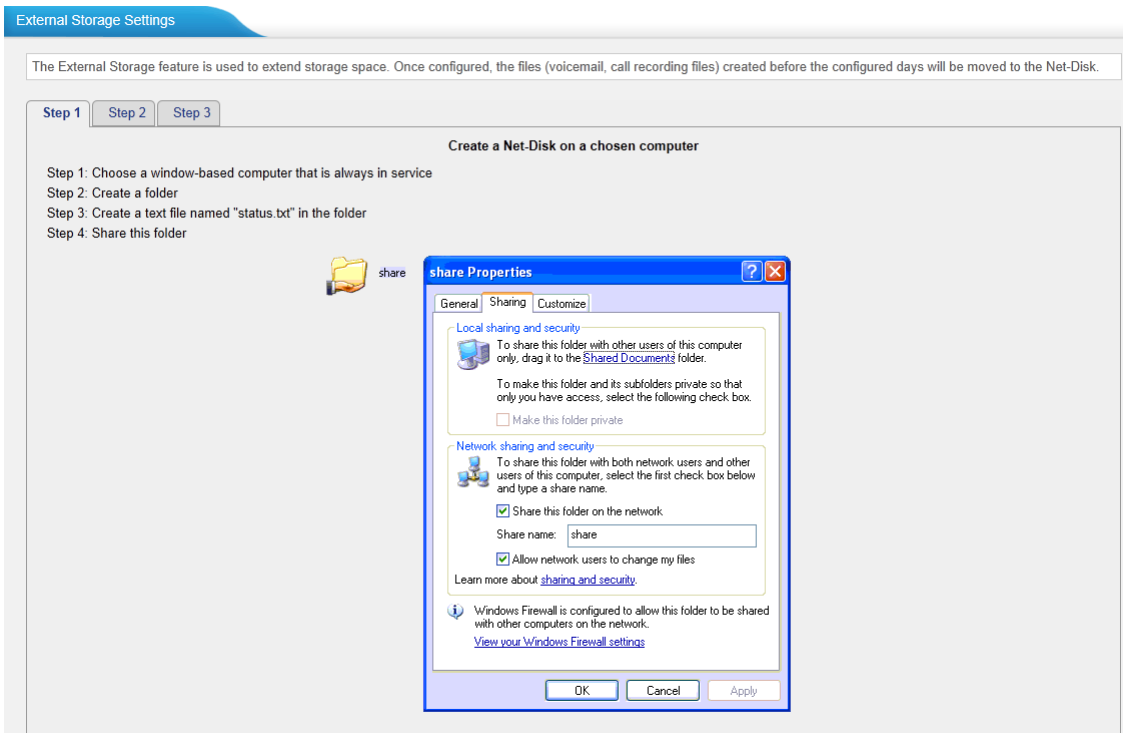

Figure 5-19

Step 1: Choose a window-based computer that is always in service
Step 2: Create a folder
Step 3: Create a text file named "status.txt" in the folder
Step 4: Share this folder

Then we need input the Net-Disk information in step2 page.

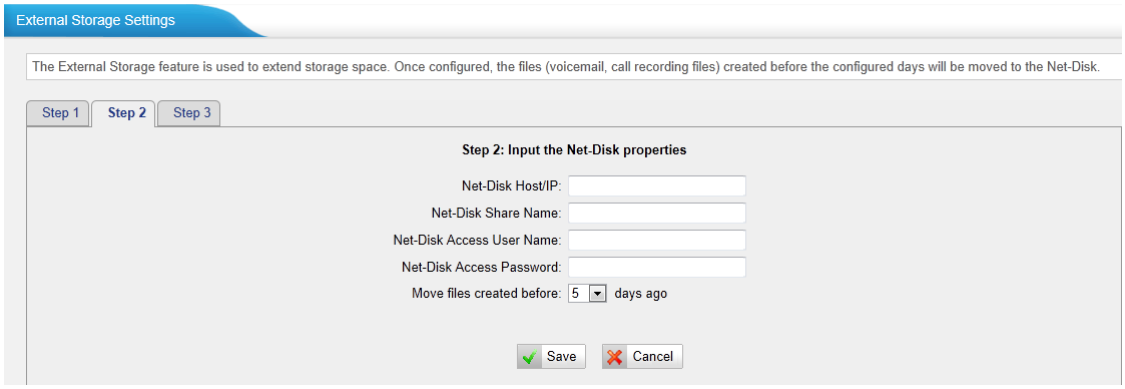

Figure 5-20

Net-Disk Host/IP: Change this to the IP address of the computer where backup files will be stored.

Net-Disk Share Name: Change this to the name of the shared folder where backups will be stored.

Net-Disk Share Username: The user name used to log into the network share. Leave this blank if it is not required

Net-Disk Share Password: The password used to log into the network share. Leave this blank if it is not required

If configuring is correctly, open your Windows share folder to see if the MyPBX backup files and folders has been created. If the contents of the backup folder look similar to step3 page, then you have successfully configured external storage on the MyPBX unit.

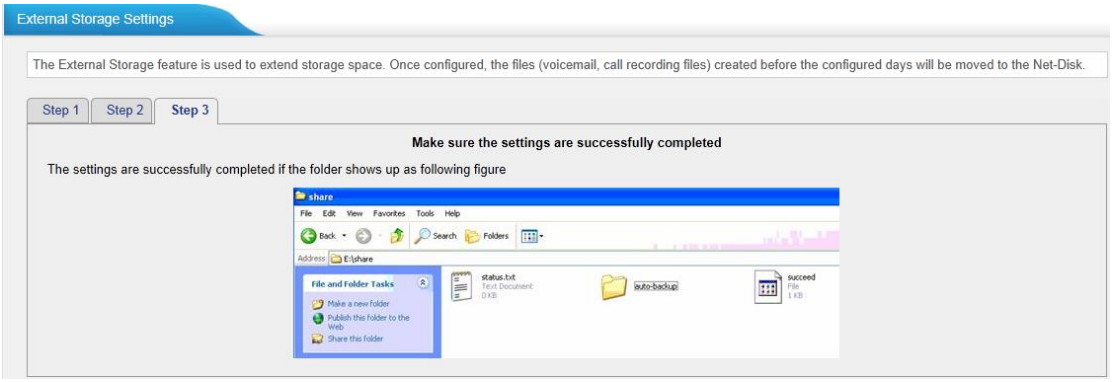

Figure 5-21

6 PBX

Click

to access

In this page, we can configure the settings of extension, trunk, inbound call control, outbound call control, audio settings and the others. When configured well, we can make calls as scheduled

6.1 Extensions

In this page, we can configure the extensions' details and provision the supported models automatically.

6.1.1 FXS/VoIP Extensions

There are three types of extensions supported in MyPBX U5XX: SIP, IAX and analog extension.

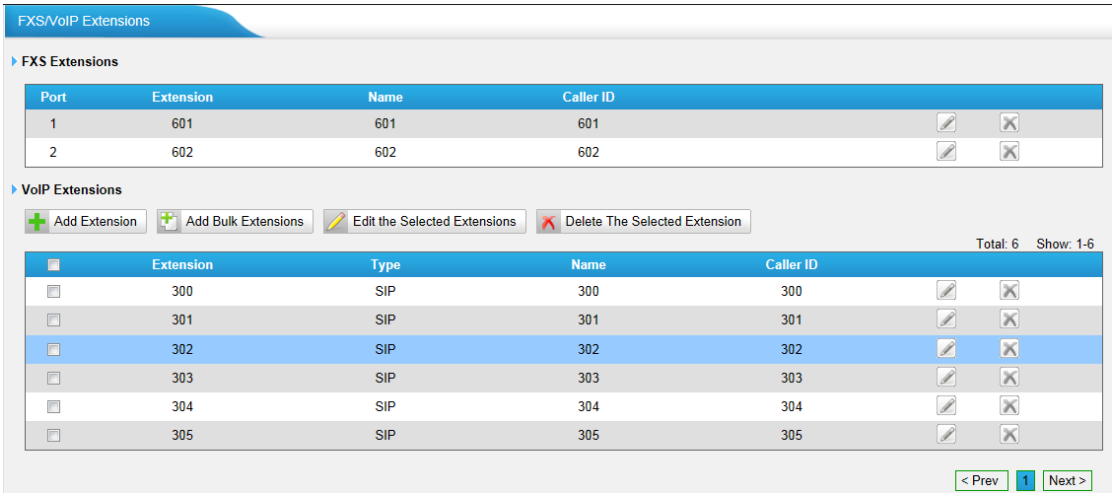

Figure 6-1

FXS Extensions

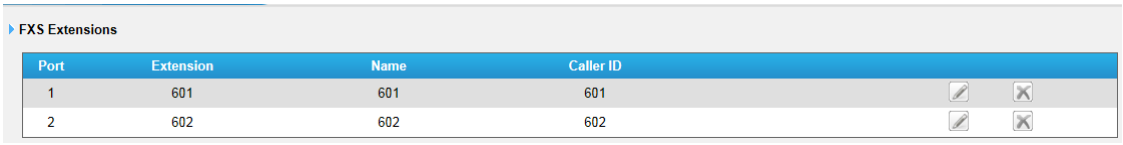

Figure 6-2

There are two analog extensions in MyPBX U5XX if S2 module is installed, to modify the extension number, please delete it first, then recreate it again

1) General

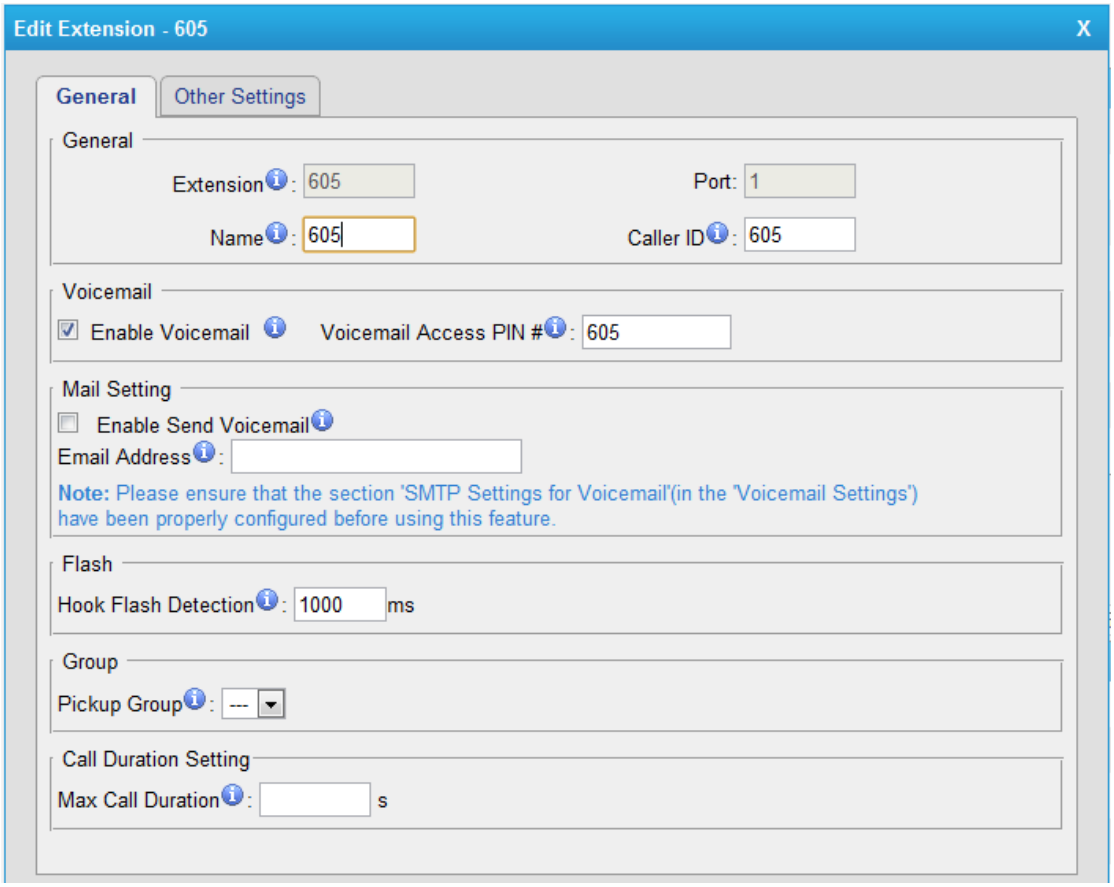

Figure 6-3

·Extension

The numbered extension, i.e. 1234, that will be associated with this particular User / Phone.

·Port

The extension correspond port.

·Name
A character-based name for this user, i.e. 'Bob Jones' .

·Caller ID
The Caller ID (CID) string will be used when this user calls another internal user.

2) Voicemail
·Enable Voicemail
Check this box if the user should have a voicemail account.

·Voicemail Access PIN #
Voicemail Password for this extension, i.e. '1234' .

3) Mail Setting
·Enable Send Voicemail
Once enabled, the voicemail will be sent to the below email address as an attachment.

·Send Voicemail to Email Address
This option defines whether or not voicemails/Fax is sent to the Email address as an attachment.
Note: Please ensure that all voicemail settings are properly configured on the System Settings -> Voicemail Settings page before using this feature.

4) Flash
·Hook Flash Detection
Sets the amount of time, in milliseconds, that must pass since the last hook-flash event received by MyPBX before it will recognize a second event. If a second event occurs in less time than defined by Hook Flash Detection, then MyPBX will ignore the event. The default value of Flash is 1000 ms, and it can be configured in 1ms increments.

5) Group
·Pickup Group
If this extension belongs to a pickup group, any calls that ring this extension can be picked up by other extensions in the same pickup group by dialing the Call Pickup feature code (default *4).
Note: *4 is the default setting, it can be changed under Feature Codes -> General -> Call Pickup.

6) Call Duration Settings

Setup the max cull duration for every call of this extension, but it's only valid for outbound calls. And if enter '0' or leave this blank empty, the value would be equal to the max call duration configured in the Option Settings page.
Note: This setting will not be valid for internal calls.

Other Settings

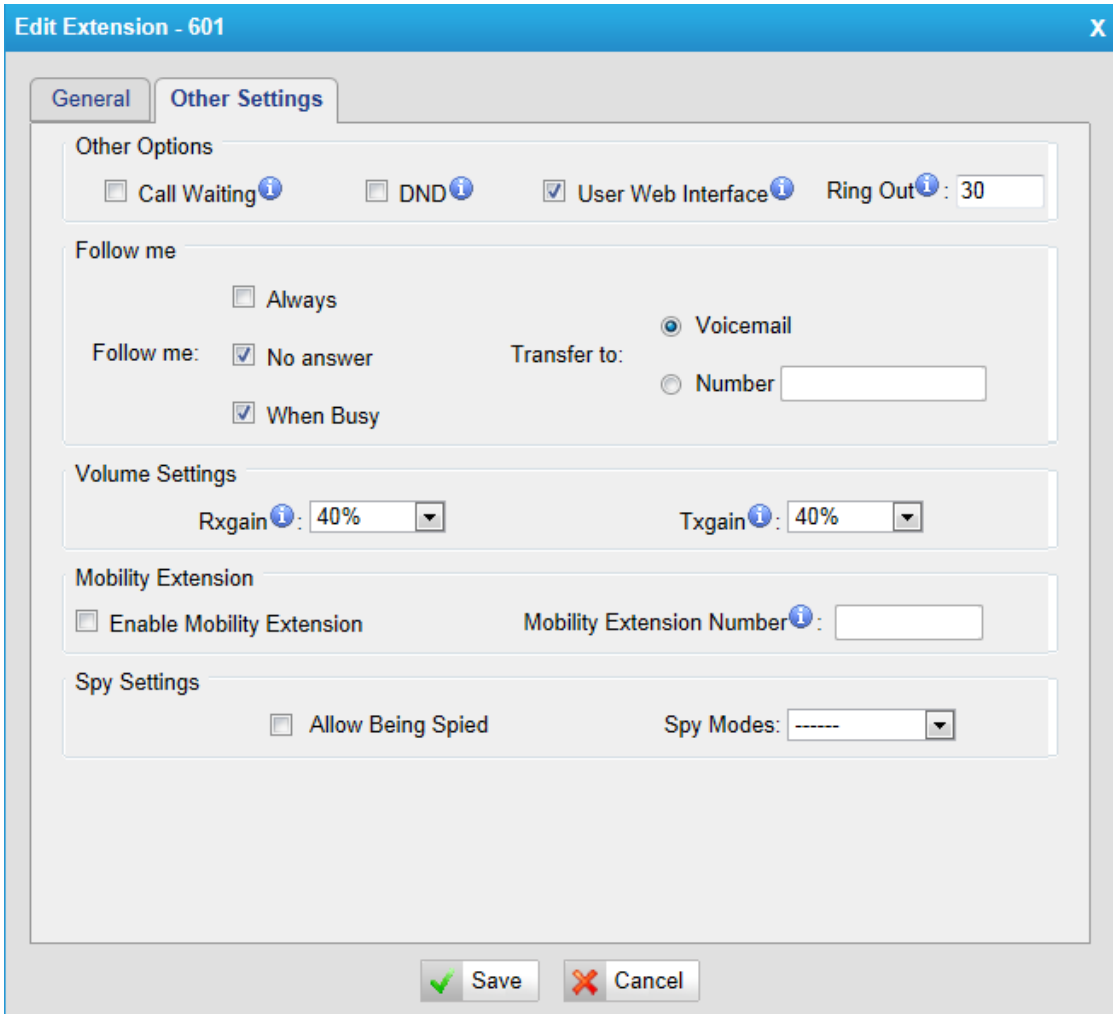

Figure 6-4

7) Other options

·Call Waiting

Check this option if the extension should have Call Waiting capability. If this option is checked, the 'When busy' follow me options will not be available.

·DND

Don't Disturb.

·User Web Interface

Check this option to allow the user to login to the MyPBX User Web interface, which can be used to access voicemail and extension recordings. Users may

login to the MyPBX User Web interface by using their extension number and voicemail PIN # as the login and password respectively.

·Ring Out

Check this option if you want to custom the ring time. Tone will stop over the time defined

8) Follow me (Call Forwarding)

This function sets inbound call forwarding on an extension. An administrator can configure Follow Me for this extension

9) Volume Settings

Rxgain: The Volume sent to FXS extension.

Txgain: The Volume sent out by the FXS extension

10) Mobility Extension

MyPBX allows you to use your mobile phone as extension. If you set your mobile phone as mobility extension and then you call MyPBX with this mobility phone, you will hear a dial tone. MyPBX will recognize your call as a call from an extension. You can dial the number of other extensions (Your caller ID will be the number of your extension) or dial out via outbound routes just like dialing from your extension.

Note: If callback is enabled in the inbound route, the mobility extension function of this inbound route will be disabled

11) Spy Settings

MyPBX allows extension to monitor/barge in other conversation. Once this feature is enabled, the extension has the ability to monitor/barge in other calls using the feature codes for each spy mode, refer to 'Feature Codes' page for more information.

·spy modes

There are 4 spy modes available for choice:

General spy: you have the permission to use the following 3 modes.

Normal spy: you can only hear the call, but can't talk

Whisper spy: you can hear the call, and can talk with the monitored extension

Barge spy: you can hear the call and talk with them both

Note: for example, if 500 want to monitor extension 501, we need to enable the 'allow being spied ' for 501, and choose the spy mode for extension 500.

Then pick up 500 and dial “feature codes + 501” to start monitoring when 501 is in a call

If 500 choose ‘normal spy’, it should dial’*90501’ to start monitoring;

If 500 choose 'whisper spy', it should dial '*91501' to start monitoring;
If 500 choose 'barge spy', it should dial '*92501' to start monitor;
If 500 choose 'general spy', it can dial '*90501','*91501' or '*92501' to start monitor.

VoIP Extensions

A VOIP extension is a SIP/IAX Account that allows an IP Phone or an IP Soft-Phone client to register on MyPBX

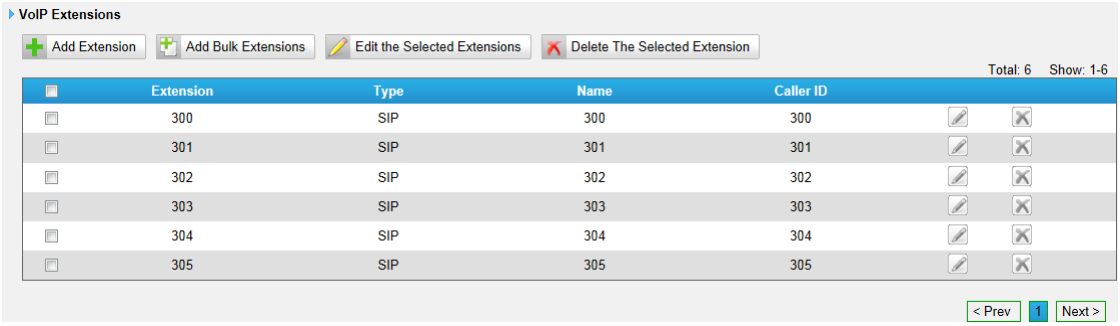

Figure 6-5

We can click 'Add extension' to start.

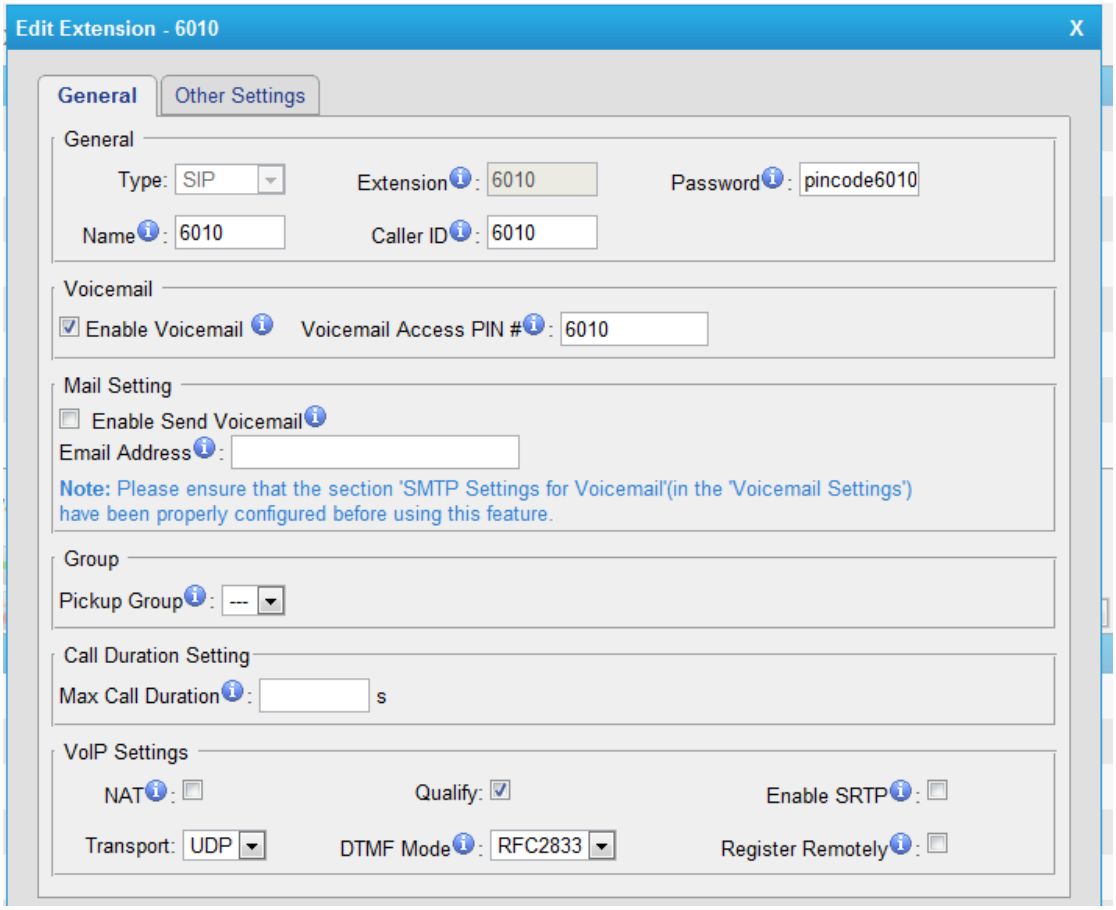

Figure 6-6

1) General

·Type

Extension type: SIP,IAX or SIP/IAX.
SIP – The extension sends and receives calls using the VoIP protocol SIP.
IAX -The extension sends and receives calls using the VoIP protocol IAX.

·Extension

The numbered extension, i.e. 1234, that will be associated with this particular User / Phone.

·Password

The password for this extension, Ex: '12t3f6'

·Name

A character-based name for this user, EX: 'Bob Jones'

·Caller ID

The Caller ID will be used when this user calls another internal extension.

2) Voicemail

·Enable Voicemail

Check this box if the user should have a voicemail account.

·Voicemail Access PIN #

The voicemail Password for this extension, i.e. '1234' .

3) Mail Setting

This option defines whether or not voicemails or faxes are sent to an Email Address as attachment.

·Enable Send Voicemail

Once enabled, the voicemail will be sent to email as an attachment.

·Email Address

Email address used to receive the voicemail or Fax.
Note: Please ensure that the section 'SMTP Settings For Voicemail'(in the 'Voicemail Settings') have been properly configured before using this feature.

4) Group

·Pickup Group

If this extension belongs to a pickup group, any calls that ring this extension can be picked up by other extensions in the same pickup group by dialing the Call Pickup feature code (default is *4).

Note: *4 is the default setting, it can be changed under Feature Codes -> General -> Call Pickup.

5) Call Duration Settings

Setup the max cull duration for every call of this extension, but it's only valid for outbound calls. And if enter '0' or leave this blank empty, the value would be equal to the max call duration configured in the Option Settings page.

Note: This setting will not be valid for internal calls.

6) VoIP Settings

·NAT

This setting should be used when the system is using a public IP address to communicate with devices hidden behind a NAT device (such as a broadband router). If you have one-way audio problems, you usually have problems with your NAT configuration or your firewall's support of SIP and/or RTP ports.

·Qualify

Send check alive packets to IP phones

·Enable SRTP

Enable extension for SRTP (RTP Encryption).

·Transport

This will be the transport method used by the extension. The options are UDP (default) or TCP or TLS.

·DTMF Mode – RFC2833, Info, Inband, Auto.

·Remote Register

Allow to register remote extensions.

This option is used to enhance the system security, it's disabled by default. More details for the system security configuration, please refer to **APPENDIX B MyPBX Security Configuration Guide**

Other Options

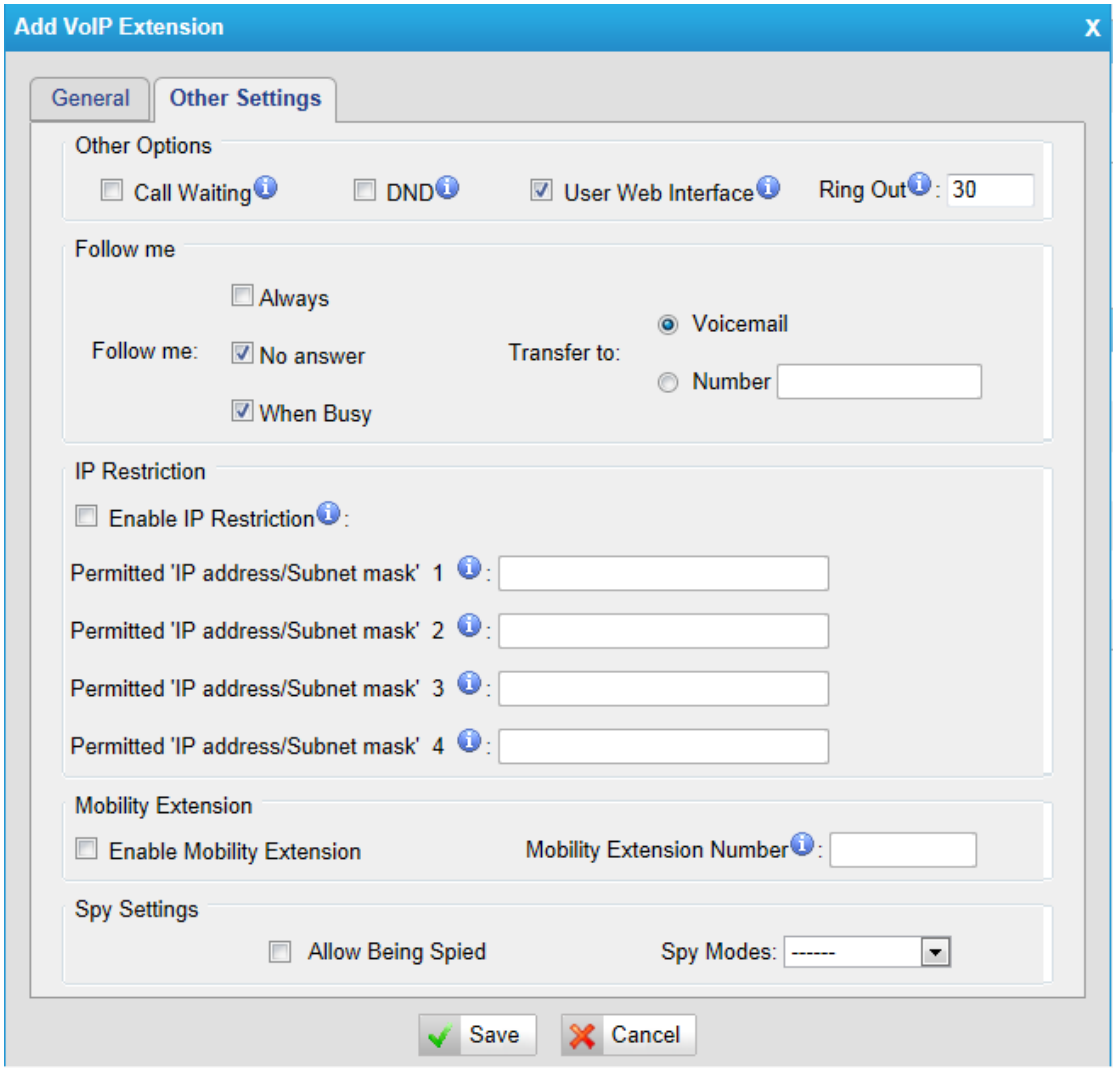

Figure 6-7

7) Other Options

.Call Waiting

Check this option if the extension should have Call Waiting capability. If this option is checked, the 'When busy' follow me options will not be available. The call waiting function of IP phone has higher priority than MyPBX's call waiting function.

.DND

Don't Disturb. When DND is enabled for an extension, the extension will be not available.

.User Web Interface

Check this option to allow the user to login to the MyPBX User Web interface, which can be used to check voicemail and extension recordings. Users may login to MyPBX User Web interface by using their extension number and voicemail PIN # as the login and password respectively.

.Ring Out
Check this option if you want to customize the ring time. Ring tone will stop over the time defined.

8) Follow me (Call Forwarding)
Call forwarding for an extension can be configured here. The administrator can configure Follow Me option for this extension. If you want to transfer the call to an outbound number, please follow the dial pattern of outbound route filled in the outbound number.
For example: transferring to your mobile phone number 123456789, the dial pattern of outbound route is '9.', you should fill in 9123456789 here.

9) IP Restriction
·Enable IP Restriction
Check this option to enhance the VoIP security for MyPBX. If this option is enabled, only the permitted IP/Subnet mask will be able to register this extension number. In this way, the VoIP security will be enhanced.
More details for the system security configuration, please refer to **APPENDIX B MyPBX Security Configuration Guide**.

·Permitted 'IP address/Subnet mask'
The input format should be 'IP address'+'/'+'Subnet mask'.
e.g."192.168.5.100/255.255.255.255" means only the device whose IP address is 192.168.5.100 is allowed to register this extension number.
e.g."192.168.5.0/255.255.255.0" means only the device whose IP address is 192.168.5.XXX is allowed to register this extension number.
10) Mobility Extension
MyPBX allows you to use your mobile phone as extension. If you set your mobile phone as mobility extension and then you call MyPBX with this mobility phone, you will hear a dial tone. MyPBX will recognize your call as a call from an extension. You can dial the number of other extensions (Your caller ID will be the number of your extension) or dial out via outbound routes just like dialing from your extension.

Note: If callback is enabled in the inbound route, the mobility extension function of this inbound route will be disabled.

11) Spy Settings
MyPBX allows extension to monitor/barge in other conversation. Once this feature is enabled, the extension has the ability to monitor/barge in other calls using the feature codes for each spy mode, refer to 'Feature Codes' page for more information.

·spy modes

There are 4 spy modes available for choice:
General spy: you have the permission to use the following 3 modes.
Normal spy: you can only hear the call, but can't talk
Whisper spy: you can hear the call, and can talk with the monitored extension
Barge spy: you can hear the call and talk with them both

Note: for example, if 500 want to monitor extension 501, we need to enable the 'allow being spied ' for 501, and choose the spy mode for extension 500.
Then pick up 500 and dial "feature codes + 501" to start monitoring when 501 is in a call
If 500 choose 'normal spy', it should dial'*90501' to start monitoring;
If 500 choose 'whisper spy', it should dial '*91501' to start monitoring;
If 500 choose 'barge spy', it should dial '*92501' to start monitor;
If 500 choose 'general spy', it can dial '*90501','*91501' or '*92501' to start monitor.

6.1.2 Phone Provisioning

The Auto Provision sub menu provides users a method to Auto Provision IP Phone after the Express Setup process.
Note: Auto Provision functions fully test with these models:
Yealink (T12,T18,T20,T22,T26,T28,T32,T38,VP530,VP-2009)
Snom (300,320,360,370)
Polycom (IP 6000,IP 7000,IP 32X,IP33X,IP430,IP450,IP550,IP560,VVX1500)
Cisco (IP7940,IP7960)
Aastra(480i,480i CT,6757i,6757i CT, 6737i)
Grandstream(GXP1450,GXP2100,GXP2110,GXP2120)
Escene(ES220,ES320,ES330,ES410,ES620)
Fanvil(C56,C58,C60,C62)

News:
When provisioning Yealink and Snom IP phone, MyPBX is not needed to be set as the only DHCP server any more

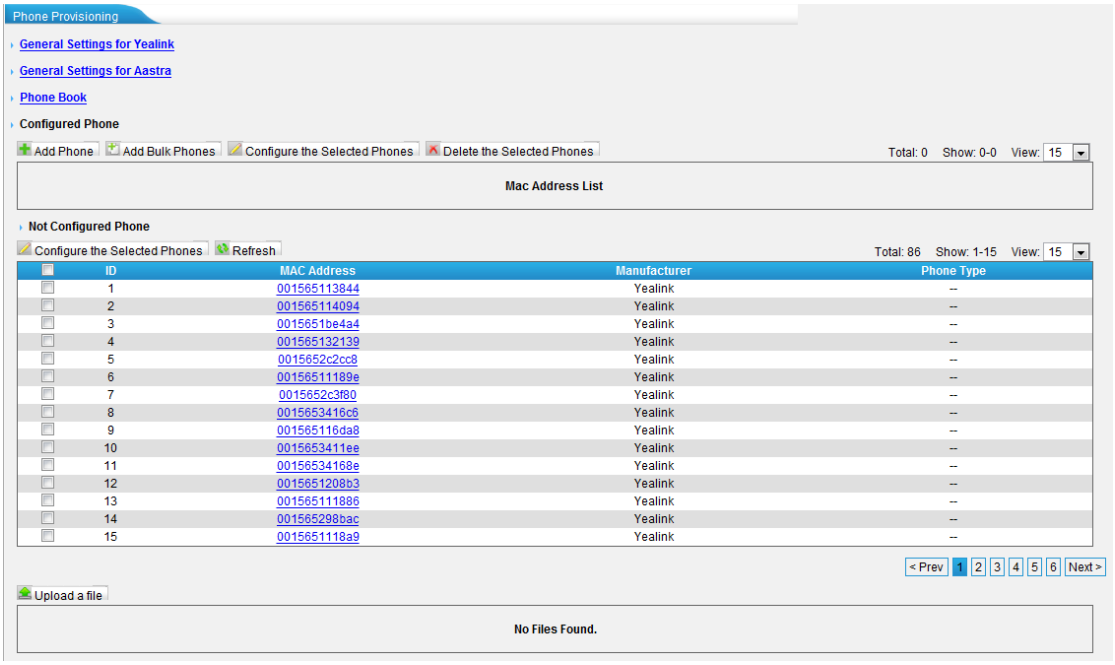

Figure 6-8

6.1.2.1 General Settings for Yealink

In this page, you can configure it before provisioning Yealink IP phones, including the items like general preferences, codecs, remote phone book and firmware upgrade

Note: if firmware download server is enabled, IP phone will update the firmware automatically according the version and server you have configured during the provision process.

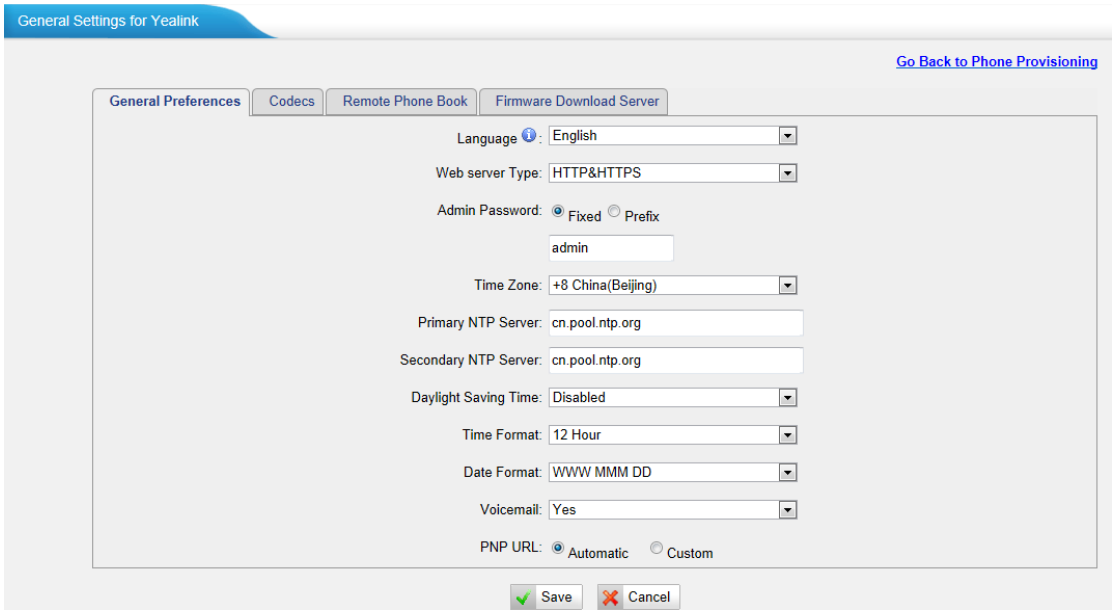

Figure 6-9

6.1.2.2 General Settings for Aastra

In this page, you can configure it before provisioning Aastra IP phones, including the items like local dial plan, time and date setting programkeys configuration and so on.

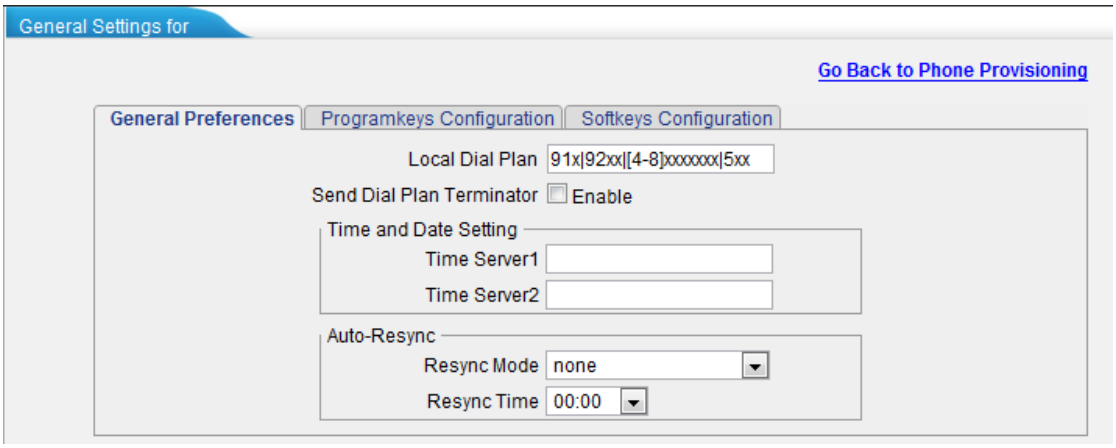

Figure 6-10

6.1.2.3 Phone book

You can add your contacts here and provision them to your IP phone

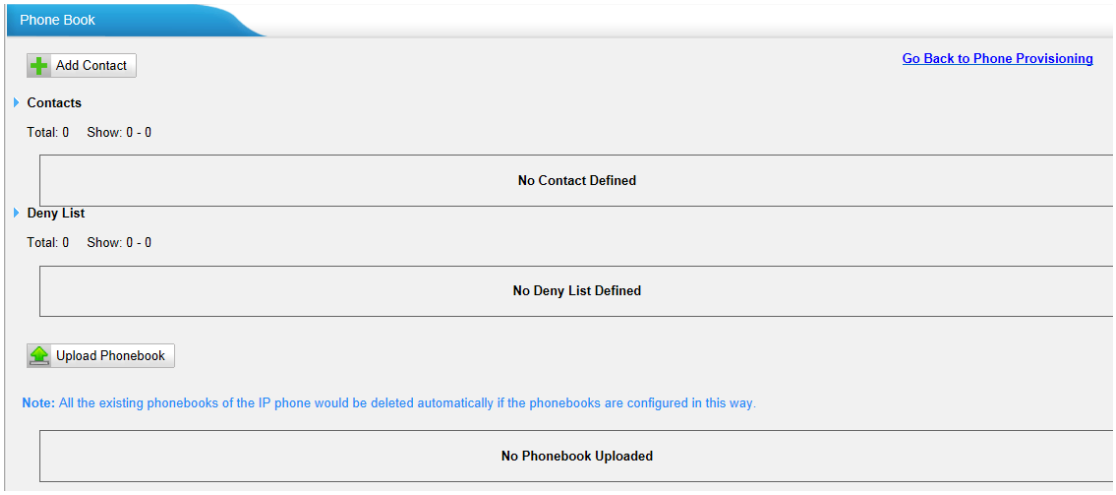

Figure 6-10

1) Add Contact

·Type

There are three types: None, VIP and Deny list (Blacklist).

·Group

There are 5 groups: None, Friends, Family, Work, Colleagues list.

·Nick Name

You can set a nick name for this number.

·Favorite

Only works with snom phone.

·Organization
Input the organization of this contact. Only works with snom phone.

·Title
Input the title of this contact. Only works with snom phone.

·Email
Input the email of this contact. Only works with snom phone.

·Birthday
Input the birthday of this contact. Only works with snom phone.

·First Name
Input the first name of this contact. Only works with snom phone.

·Family Name
Input the family of this contact. Only works with snom phone.

·Office Number
Input the office number here

·Mobile Number
Input the mobile number here

·Home Number
Input the home number here

·Sub Number
Add sub number of this contact. Only works with snom phone.

·Note
Take some note of this contact. Only works with snom phone.

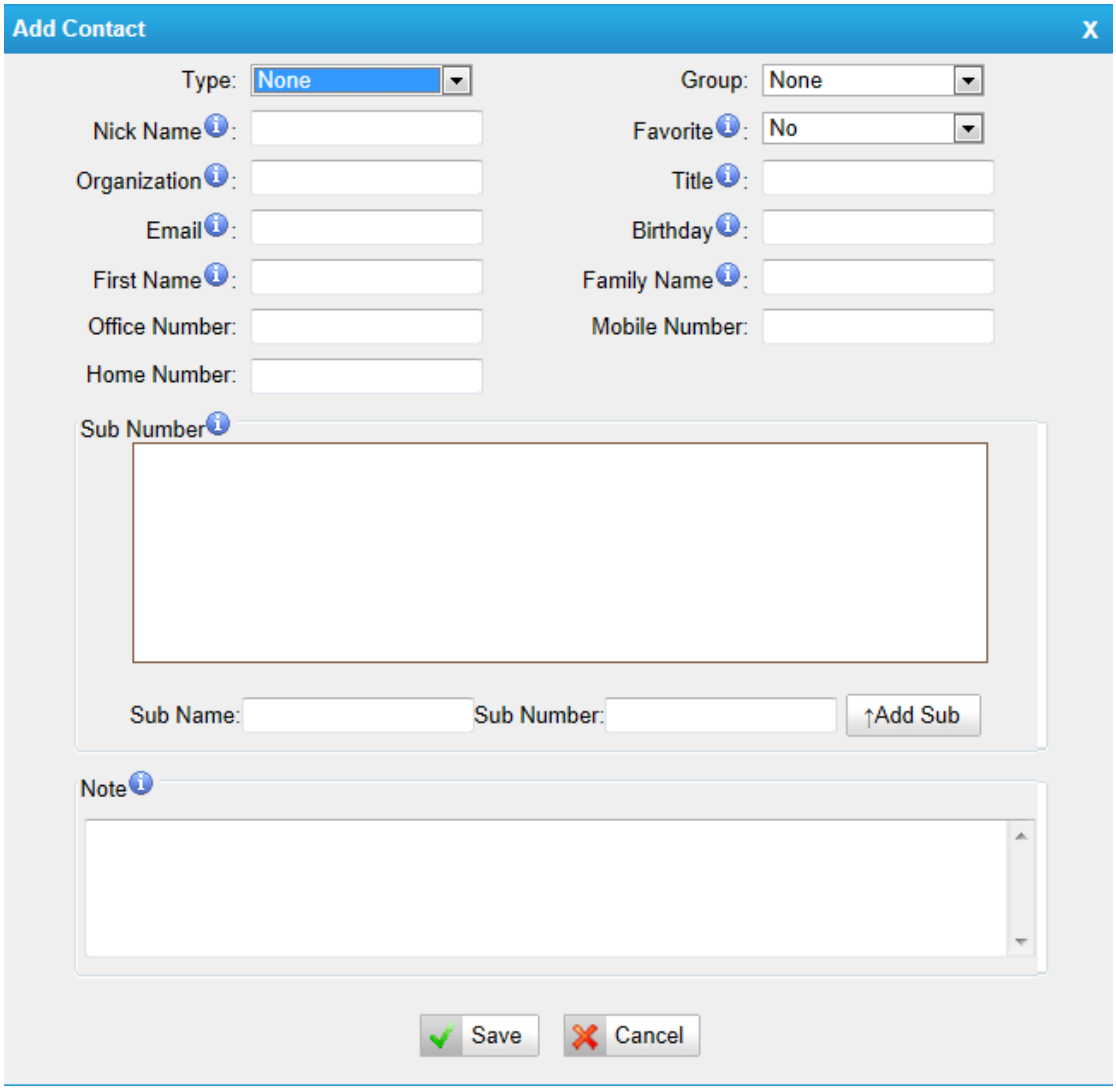

Figure 6-11

2) Upload Phonebook

You can upload a phonebook before auto provision, which will be provisioned to the IP phone when using auto provision feature to configure your IP phones. The format of phonebook should be *.xml.

Note: All the existing phonebooks of the IP phone will be replaced automatically if the phonebooks are configured in this way.

6.1.2.3 Configure phone

Let's take provisioning yealink as an example

Create New Phone have two modes,

Create New phone in webpage and Upload the IP Phone's configure file.

Add new phone via webpage

Click 'Add Phone' and fill in the corresponding information in the popup window

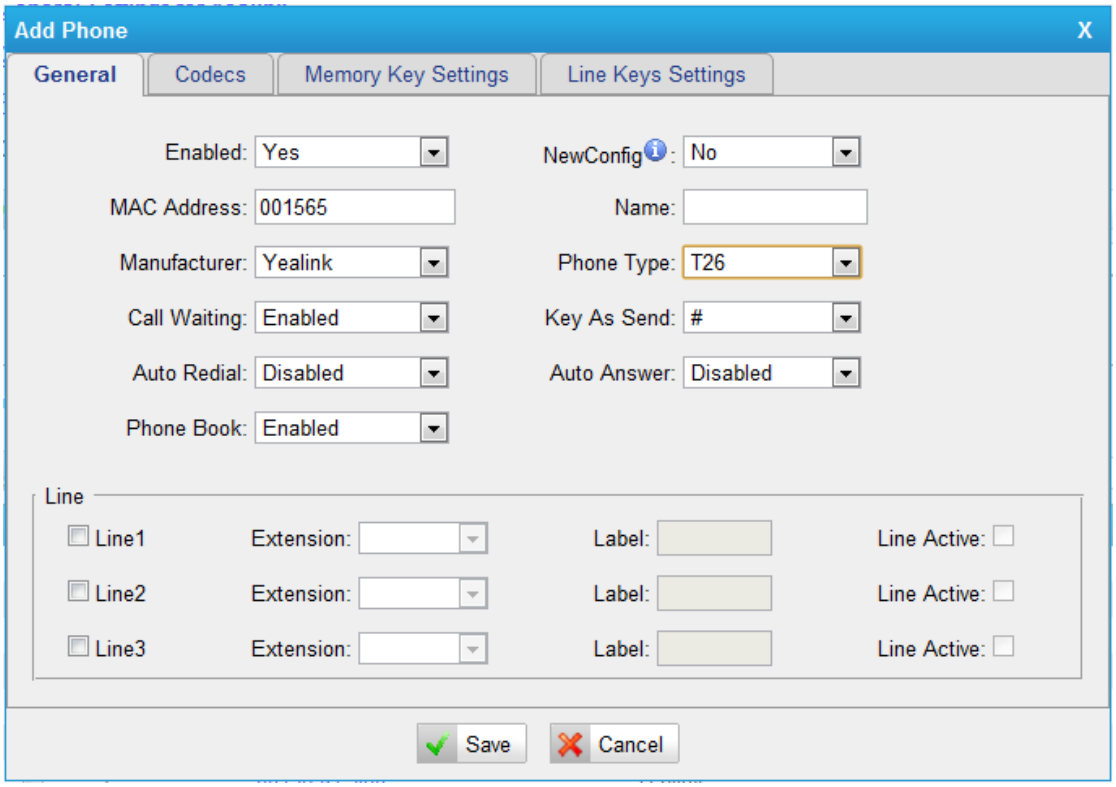

Figure 6-12

1) General

· Enabled

Choose yes or no to enable or disable this extension

· NewConfig

If the firmware version number is greater than or equal to 70,please enable this option.

· MAC address

Input the MAC address of IP phone

·Name

Put the name of this Phone here.

·Manufacturer

You can choose the Manufacturer of IP phone

·Phone Type

Choose the model of your phone. Only for snom phone

·Call Waiting

This call feature allows your phone to accept other incoming calls to an extension already in an active call.

·Key as Send
Configure the key as send, you choose # ,* or disable it

·Auto redial
Enable the auto redial for IP Phone

·Auto answer
Configure if auto answer is allowed for IP phone

·Phone book
Enable the feature of phone book of IP phone

2) Codecs

In this page, we can set the codecs for Ip phone

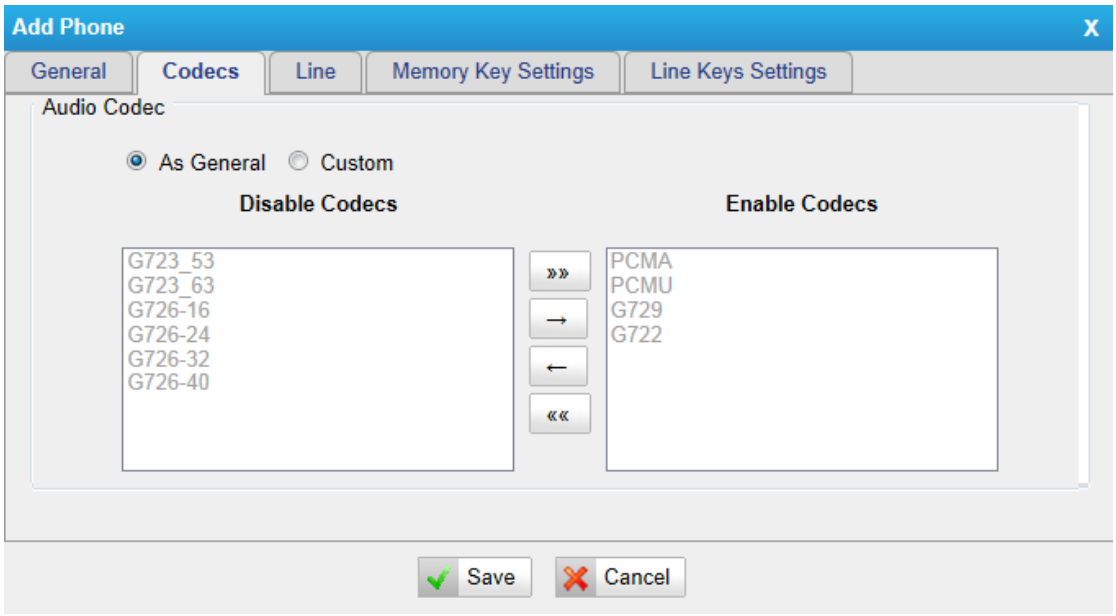

Figure 6-13

3) Line

In this page, we can set each line of IP phone for the account you want, active or not.

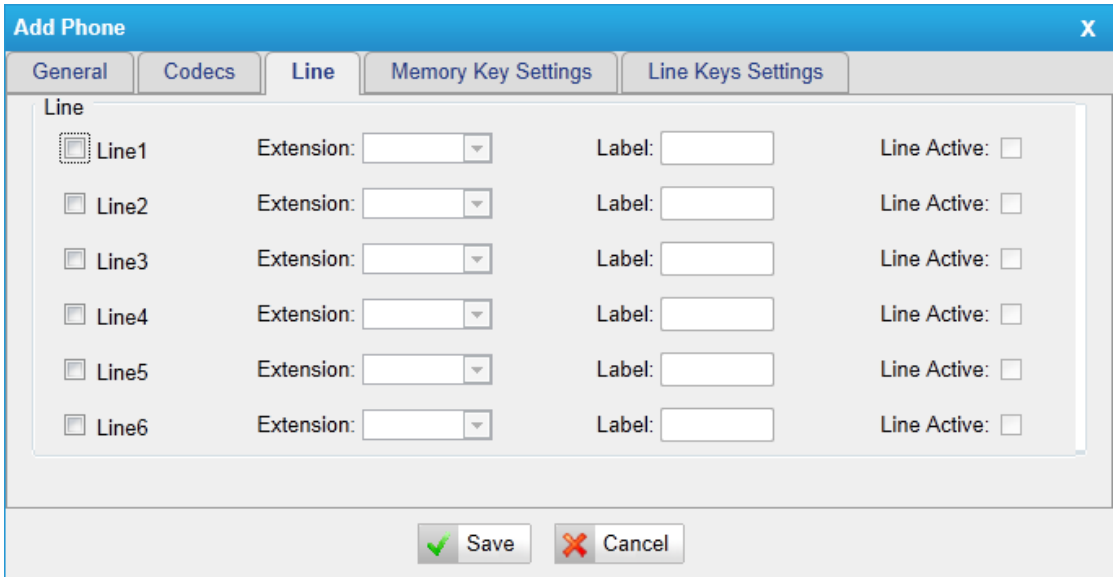

Figure 6-14

Extension: Selected the extension number for IP Phone.
Label: It is shown on the LCD for users to identify the account.
Line Active: You can choose on/off to enable/disable the account respectively

4) Memory key settings

In this page, we can configure the DSS keys of IP phone one by one.

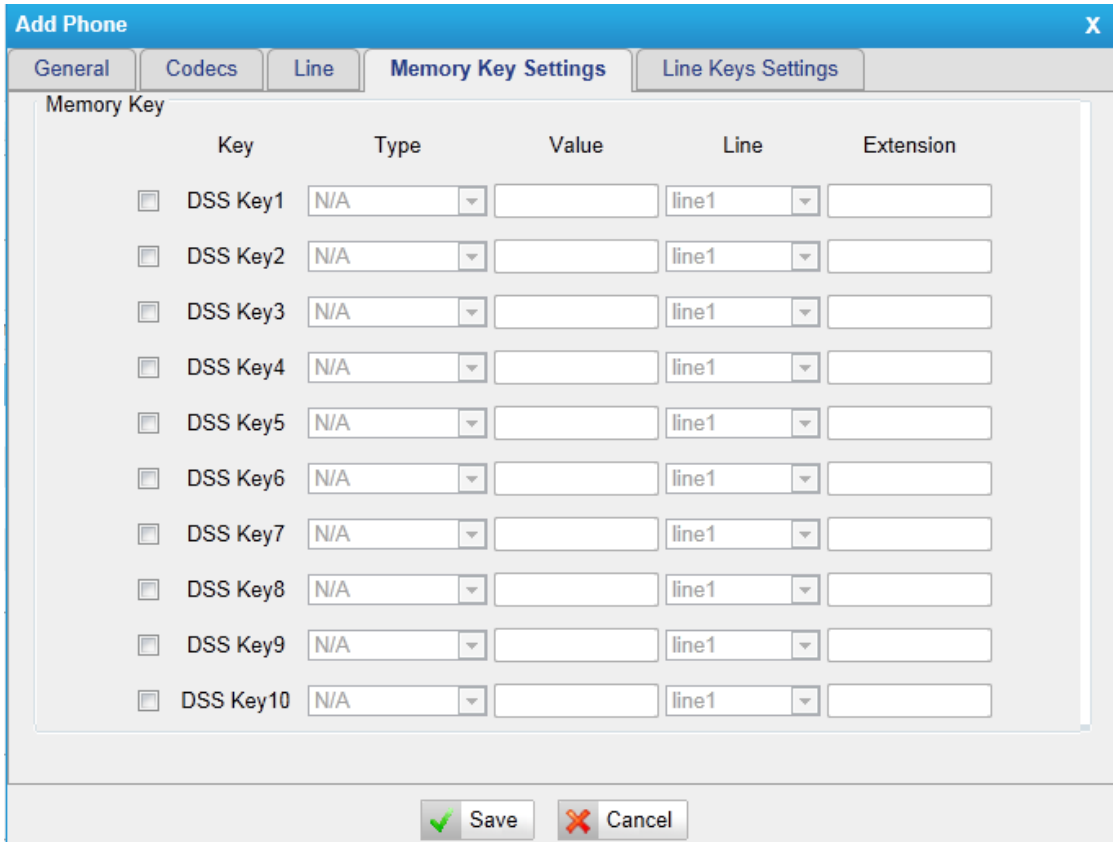

Figure 6-15

5) Line keys settings

We can configure the line key settings for this IP phone

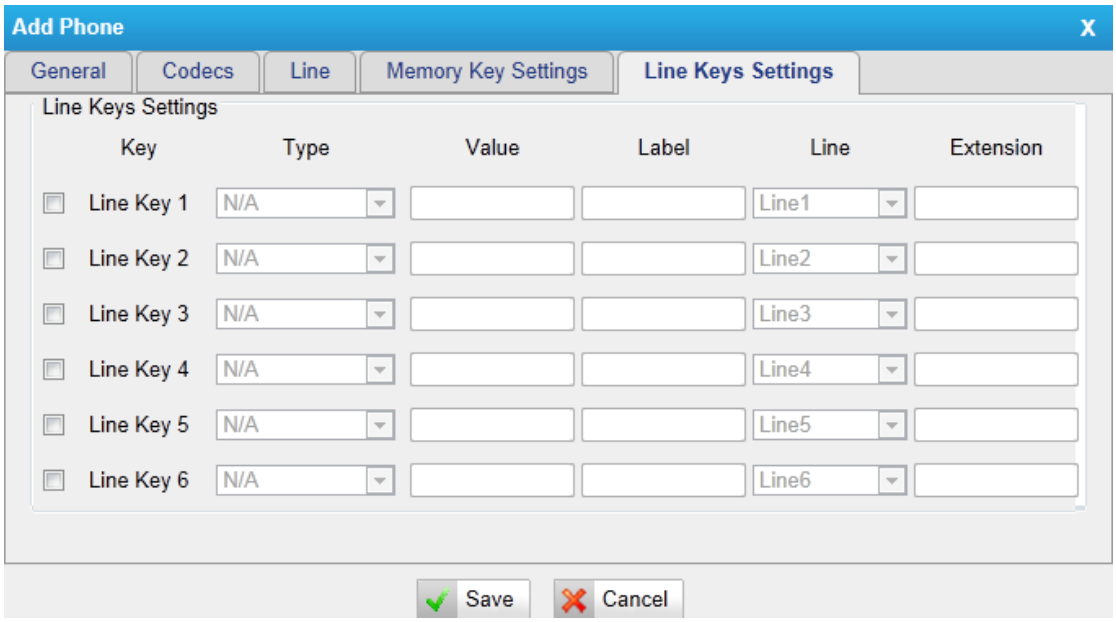

Figure 6-16

6.1.2.4 Not configured phone

In this section, MyPBX will scan all the supported IP phones and display here, we can click the 'MAC address' of IP phone and input the corresponding information in the popup window, like the picture shows below

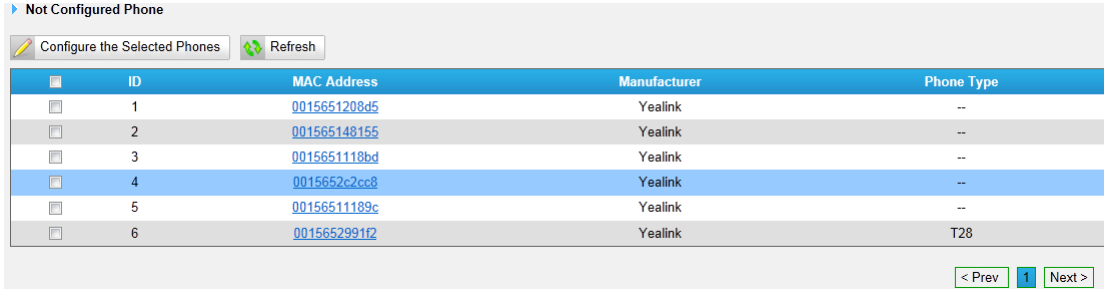

Figure 6-17

6.1.2.5 Upload a file

Click 'Upload a file' and choose the configure file of IP phone in the popup window.

Note: the file format must be .cfg

Please edit the configuration files in advance before uploading

Figure 6-18

6.2 Trunks

6.2.1 Physical Trunk

Multi physical trunks are supported in MyPBX U5XX, like E1, BRI,PSTN,GSM/UMTS, there will be 2 E1 ports fixed inside ,for other trunks, please make sure you have installed the modules inside, BRI trunk requires B2 module, PSTN trunk requires the O2, while GSM/UMTS trunk needs to install the GSM/UMTS modules inside.

Note:
E1/T1/J1 trunk in MyPBX U5XX

	MyPBX U500	MyPBX U510	MyPBX U520
number of E1/T1/J1	0	1	2

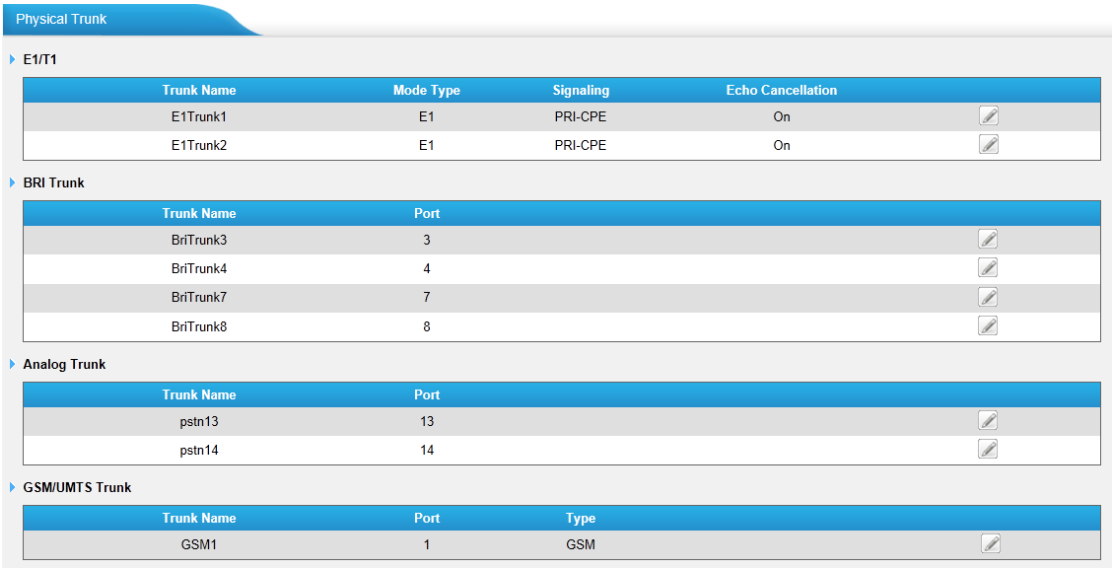

Figure 6-19

E1/T1 trunk

In this page we can configure the details of E1 trunk, before configure anything, please make sure the cable is fine, and you have got enough information from the ISDN provider.

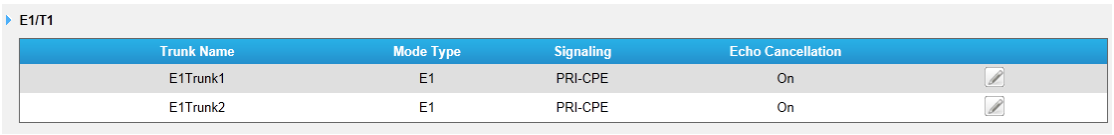

Figure 6-20

On the Physical Trunk page, click 'Edit' on the selected trunk and modify its properties in the popup window:

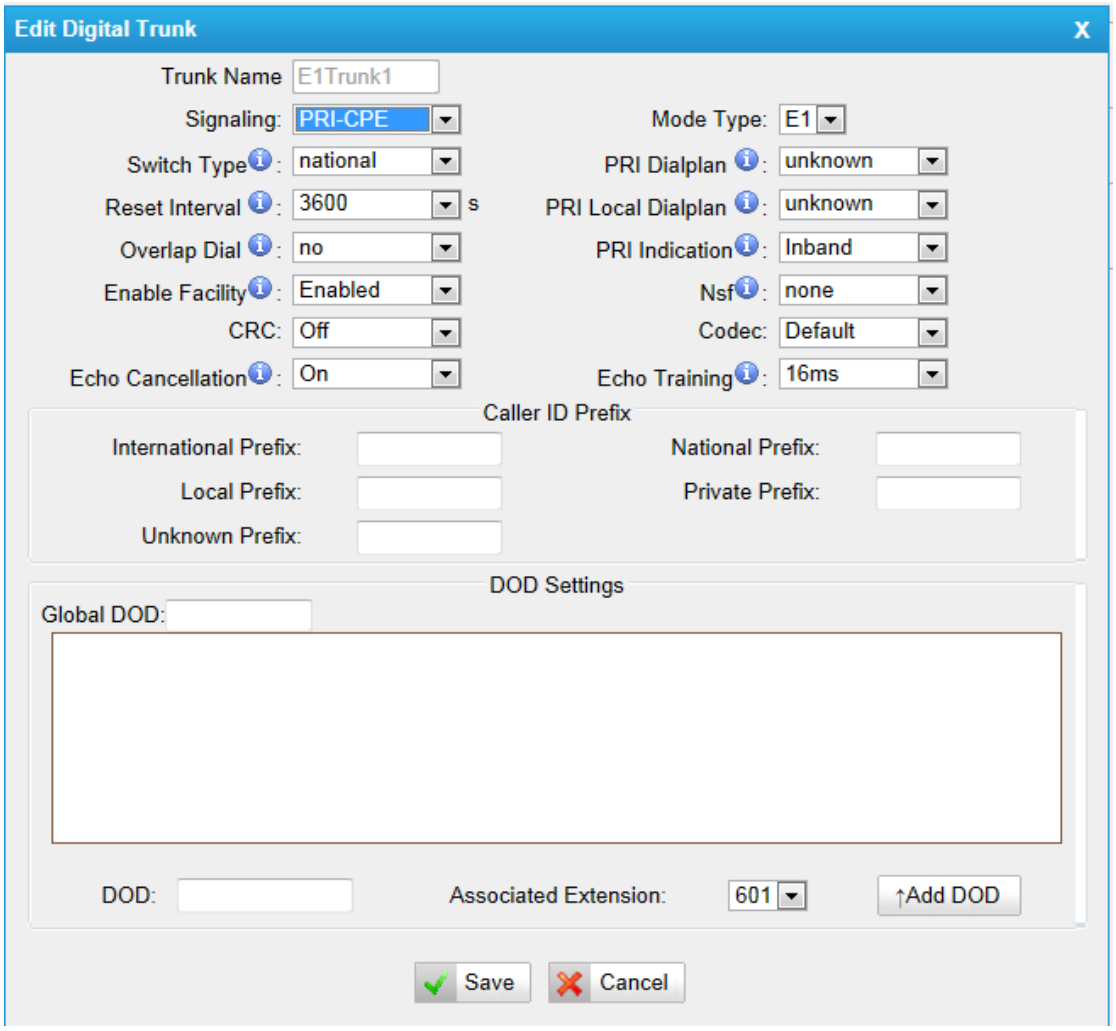

Figure 6-21

· Trunk name

Set the trunk name

·Signaling

PRI-NET, PRI-CPE,MFC/R2,SS7

·Mode Type

E1 / T1 / J1

·Switch Type

national: National ISDN type2 (common in the US)
ni1: National ISDN type 1
dms100: Nortel DMS100
4ess: AT&T 4ESS
5ess: Lucent 5ESS

euroisdn: EuroISDN
qsig: Minimalistic protocol to build a "network" with two or more PBX of different vendors!

·PRI Dial Plan
Sets an option required for some (rare) switches that require a dial plan parameter to be passed. This option is ignored by most PRI switches. It may be necessary on a few pieces of hardware. This option can almost always be left unchanged from the default.

·Reset interval
Set the time in seconds between restart of unused channels. Some PBXs don't like channel restarts. so set the interval to a very long interval e.g. 100000000 or 'never' to disable *entirely*. If you are in Israel, the following is important: As Bezeq in Israel doesn't like the B-Channel resets happening on the lines, it is best to set the reset interval to 'never' when installing a box in Israel. Our past experience also shows that this parameter may also cause issues on local switches in the UK and China.

·PRI Local Dial Plan
Sets an option required for some (rare) switches that require a dial plan parameter to be passed. This option is ignored by most BRI switches. It may be necessary on a few pieces of hardware. This option can almost always be left unchanged from the default.

·Over Lap Dial
Define whether MyPBX can dial this switch using overlap digits. If you need Direct Dial-in (DDI; in German "Durchwahl") you should change this to yes, then MyPBX will wait after the last digit it receives.

·PRI Indication
Tells how Device should indicate Busy() and Congestion() to the switch/user. Accepted values are:
inband: Device plays indication tones without answering; not available on all PRI/BRI subscription lines .
outofband: Device disconnects with busy/congestion information code so the switch will play the indication tones to the caller. Busy() will now do same as setting PRI_CAUSE=17 and Hangup().

·Facility Enable
To enable transmission of facility-based ISDN supplementary services (such as caller name from CPE over facility).

·NSF
Used with AT&T PRIs. If outbound calls are being rejected due to "Mandatory information element missing" and the missing IE is 0x20, then you need this setting.

·CRC
CRC Verification.

·Codec
Default ,A-Law,U-Law.

·Echo Cancellation
Echo cancel Obviously this disables or enables echo cancellation, it is recommended to not turn this off.

1) CallerID Prefix

·International Prefix
When there are international calls coming in via this BRI trunk, the International Prefix you have set here will be added before the CID. So you can know this is an international call before you answer it.

·National Prefix
When there are national calls coming in via this BRI trunk, the National Prefix you have set here will be added before the CID. So you can know this is a national call before you answer it.

·Local Prefix
When there are Local calls coming in via this BRI trunk, the Local Prefix you have set here will be added before the CID. So you can know this is a local call before you answer it.

·Private Prefix
When there are Private calls coming in via this BRI trunk, the Private Prefix you have set here will be added before the CID. So you can know this is a Private call before you answer it.

·Unknown Prefix
When there are calls with unknown number coming via this BRI trunk, the Unknown Prefix you set here will be shown as the caller ID.

2) DOD Setting

DOD (Direct Outward Dialing) means the caller ID displayed when dialing out, before configure this, please make sure the provider supports this feature

·Global DOD

Global direct outward dialing number.

·DOD

Direct Outward Dialing Number.

·Associated Extension

The extension make call out via BRI Trunk will display the associated DOD.

BRI Trunk

Basic Rate Interface (BRI, 2B+D, 2B1D) is an Integrated Services Digital Network (ISDN) configuration intended primarily for use in subscriber lines similar to those that have long been used for plain old telephone service. The BRI configuration provides 2 bearer channels (B channels) at 64 k bit/s each and 1 data channel (D channel) at 16 k bit/s. The B channels are used for voice or user data, and the D channel is used for any combination of data, control/signalling, and X.25 packet networking

Figure 6-22

Click edit to configure the details of BRI trunks

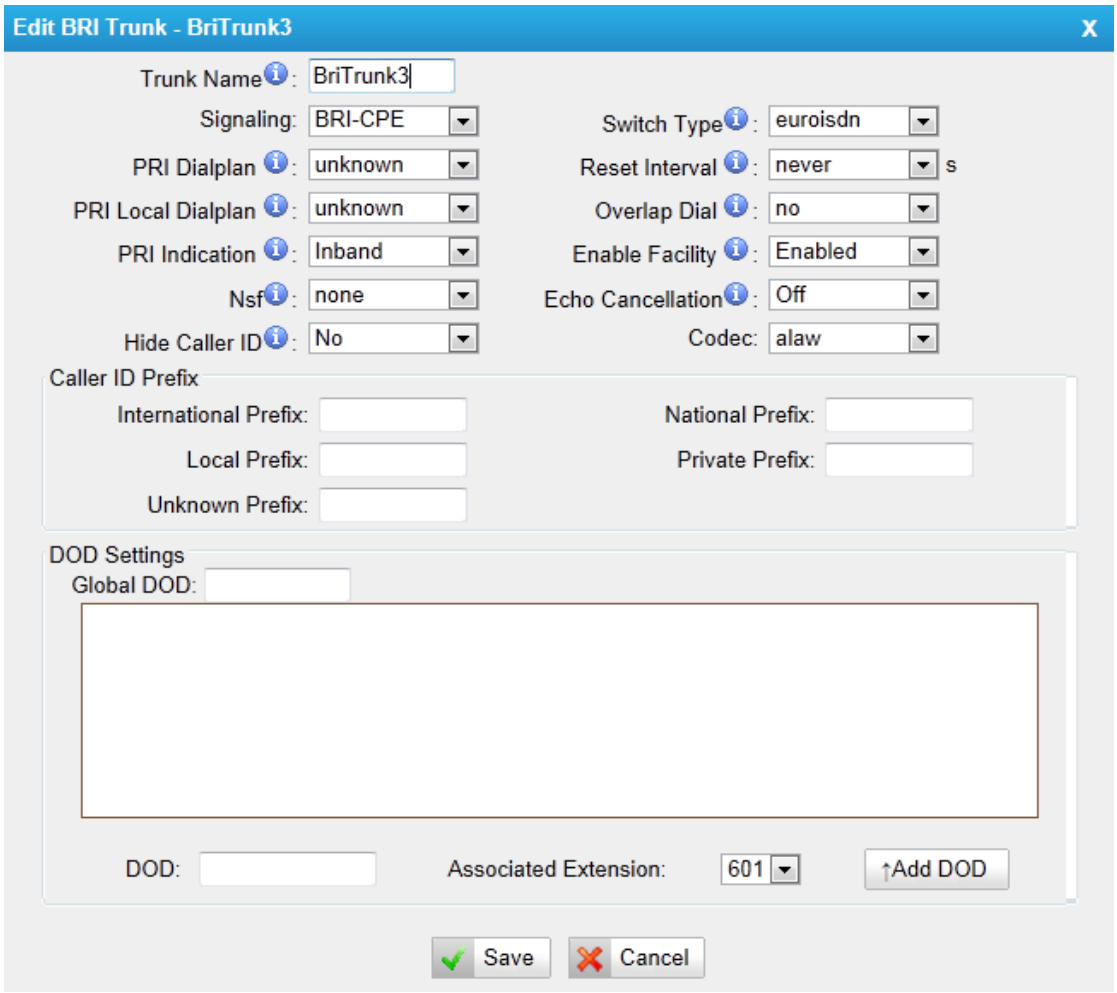

Figure 6-23

·Trunk Name

A unique label used to identify this trunk when listed in outbound rules, incoming rules, etc. Ex: 'BriTrunk1'

·Signaling

Signaling method

BRI-CPE: ISDN BRI in TE mode and Point to Point.

BRI-CPE-PTMP: ISDN BRI in TE mode and Point to multi Point.

BRI-NET: ISDN BRI in NET mode and Point to Point.

BRI-NET-PTMP: ISDN BRI in NET mode and Point to multi Point.

·Switch Type

National: National ISDN type2 (common in the US)

ni1: National ISDN type 1

dms100: Nortel DMS100

4ess: AT&T 4ESS

5ess: Lucent 5ESS

euroisdn: EuroISDN

qsig: D-channel signaling protocol at Q reference point for PBX networking.

·PRI Dial Plan
Sets an option required for some (rare) switches that require a dial plan parameter to be passed. This option is ignored by most BRI switches. It may be necessary on a few pieces of hardware. This option can almost always be left unchanged from the default.

·Reset interval
Sets the time in seconds between restart of unused channels . Some PBXs don't like channel restarts. so set the interval to a very long interval e.g. 100000000 or 'never' to disable *entirely*. If you are in Israel, the following is important: As Bezeq in Israel doesn't like the B-Channel resets happening on the lines, it is best to set the reset interval to 'never' when installing a box in Israel. Our past experience also shows that this parameter may also cause issues on local switches in the UK and China.

·PRI Local Dial Plan
Sets an option required for some (rare) switches that require a dial plan parameter to be passed. This option is ignored by most BRI switches. It may be necessary on a few pieces of hardware. This option can almost always be left unchanged from the default.

·Over Lap Dial
Whether MyPBX can dial this switch using overlap digits . If you need Direct Dial-in (DDI; in German "Durchwahl") you should change this to yes, then MyPBX will wait after the last digit it receives.

·PRI Indication
Tells how Device should indicate Busy() and Congestion() to the switch/user. Accepted values are:
inband: Device plays indication tones without answering; not available on all PRI/BRI subscription lines .
outofband: Device disconnects with busy/congestion information code so the switch will play the indication tones to the caller. Busy() will now do same as setting PRI_CAUSE=17 and Hangup().

·Enable Facility
To enable transmission of facility-based ISDN supplementary services (such as caller name from CPE over facility) .

·NSF
Used with AT&T PRIs. If outbound calls are being rejected due to "Mandatory information element missing" and the missing IE is 0x20, then you need this setting.

·Echo Cancellation
Echocancel Obviously this disables or enables echo cancellation, it is recommended to not turn this off.

·Hide CallerID
If you want others to see your CID, please disable this option.

·Codec
You can choose alaw or ulaw codes.

1) CallerID Prefix
·International Prefix
When there are international calls coming in via this BRI trunk, the International Prefix you have set here will be added before the CID. So you can know this is an international call before you answer it.

·National Prefix
When there are national calls coming in via this BRI trunk, the National Prefix you have set here will be added before the CID. So you can know this is a national call before you answer it.

·Local Prefix
When there are Local calls coming in via this BRI trunk, the Local Prefix you have set here will be added before the CID. So you can know this is a local call before you answer it.

·Private Prefix
When there are Private calls coming in via this BRI trunk, the Private Prefix you have set here will be added before the CID. So you can know this is a Private call before you answer it.

·Unknown Prefix
When there are calls with unknown number coming via this BRI trunk, the Unknown Prefix you set here will be shown as the caller ID.

2) DOD Setting
·Global DOD
Global direct outward dialing number.

·DOD
Direct Outward Dialing Number.
·Associated Extension
The extension make call out via BRI Trunk will display the associated DOD.

PSTN trunk

The public switched telephone network (PSTN) is the network of the world's public circuit-switched telephone networks

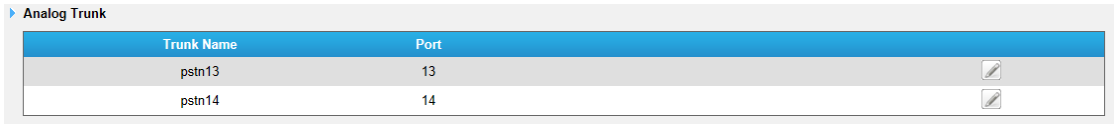

Figure 6-24

Click edit to configure more details

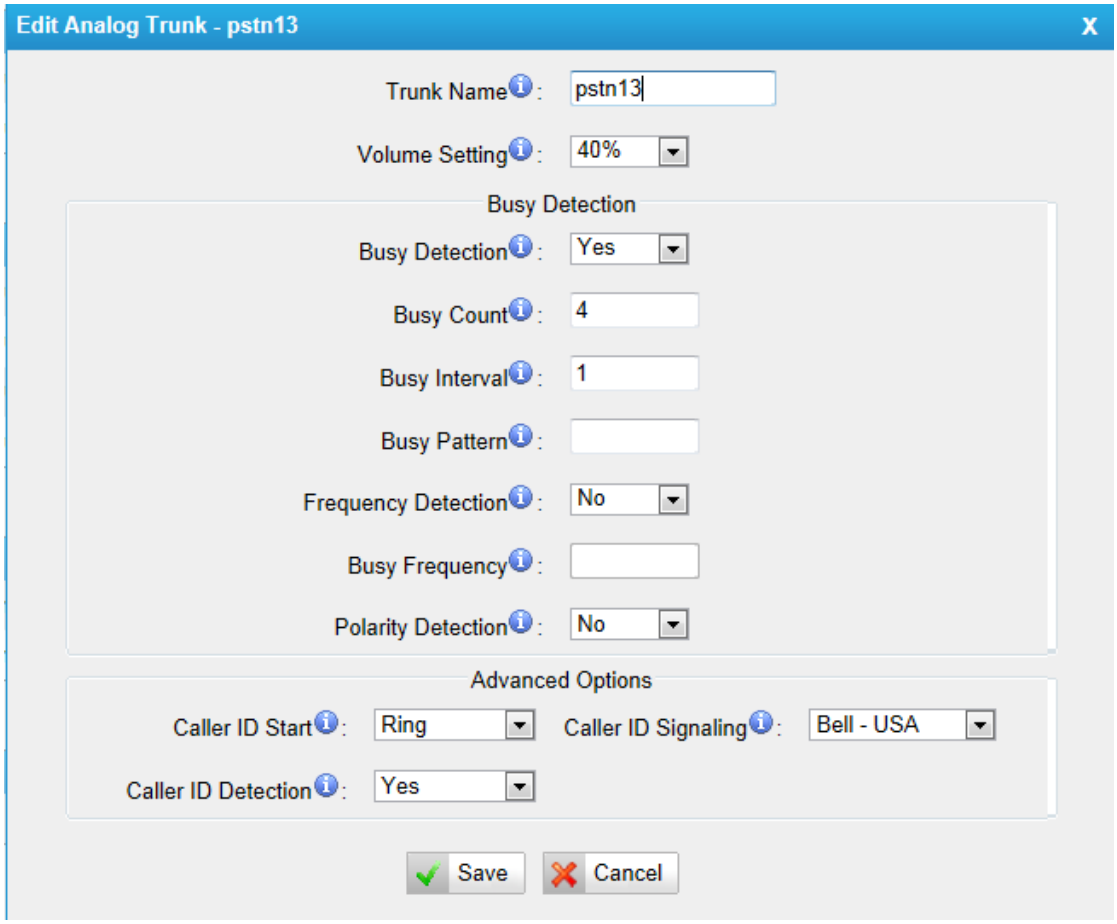

Figure 6-25

·Trunk Name

A unique label used to identify this trunk when listed in outbound rules, incoming rules, etc. Ex: 'pstn5'

·Volume Setting

Used to modify the volume level of this trunk. Normally, this setting does not need to be changed.

1）Busy Detection

·Busy Detection

Busy Detection is used to detect far end hang-up or for detecting a busy signal. Select "Yes" to turn this feature on.

·Busy Count

If Busy Detection is enabled, it is also possible to specify how many busy tones to wait for before disconnecting the call. The default is 4, but better results can be achieved if set to 6 or even 8. Remember, the higher the number, the more time will be required to release a channel. A higher setting lowers the probability that you will encounter random hang-ups.

·Busy Interval

The busy detection interval

·Busy Pattern

If Busy Detection is enabled, it is also possible to specify the cadence of your busy signal. In many Countries, it is 500 msec on, 500 msec off. Without Busy Pattern specified, MyPBX will accept any regular sound-silence pattern that repeats <Busy Count> times as a busy signal. If you specify Busy Pattern, then MyPBX will further check the length of the tone and silence, which will further reduce the chance of a false positive disconnect.

·Frequency Detection

Used for Frequency Detection (Enable detecting the busy signal frequency or not).

·Busy Frequency

If the Frequency Detection is enabled, you must specify the local frequency.

·Polarity Detection

Configure if the call needs to be hung up when a polarity signal arrived

2）Advanced Options

·Caller ID Start

This option allows you to define the start of a Caller ID signal:
Ring: Start when a ring is received (Caller ID Signaling: Bell_USA, DTMF).
Polarity: Start when a polarity reversal is started (Caller ID Signaling: V23_UK,V23_JP,DTMF).
Before Ring: Start before a ring is received (Caller ID Signaling: DTMF).

·Caller ID Signaling

This option defines the type of Caller ID signaling to use. It can be set to one of the following:
Bell: bell202 as used in the United States

v23_UK: suitable in the UK
v23_Japan: suitable in Japan
v23-Japan pure: suitable in Japan
DTMF: suitable in Denmark, Sweden, and Holland

.Caller ID Detection
For fxo trunks, this option forces MyPBX to clarify Caller ID incoming calls

GSM/UMTS Trunk

GSM/UMTS trunks are supported in MyPBX U5XX if you have got the GSM/UMTS module and SIM cards installed. One GSM/UMTS trunks support only one SIM card for one concurrent calls



Figure 6-26

Click edit to configure more details.

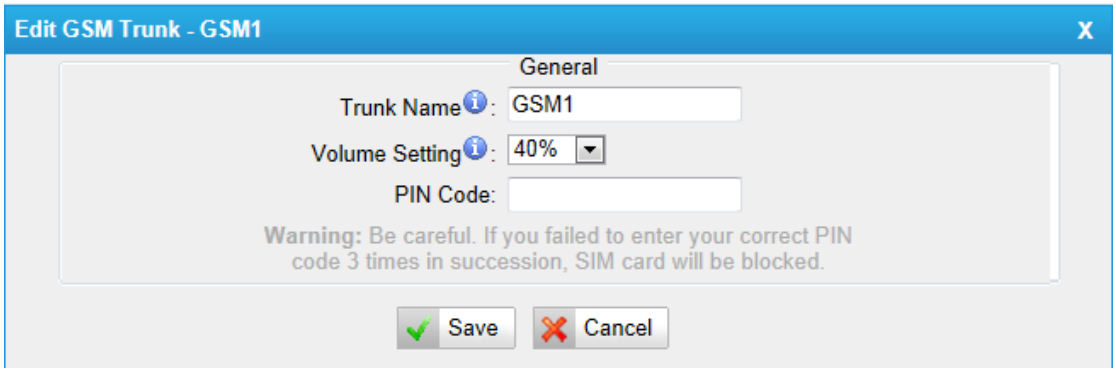

Figure 6-27

Trunk Name
A unique label used to identify this trunk when listed in outbound rules, incoming rules, etc. Ex: 'GSM9'

·Volume Setting
Used to modify the volume level of this trunk. Normally, this setting does not need to be changed.

·Pin Code
Please enter your SIM card pin code here if your card has a pin code

6.2.2 VoIP Trunk

There are two types of VOIP trunk in MyPBX: SIP and IAX, in this page, we can also configure the 'service provider' trunk, which doesn't need the use name and password for authorization, when you have bought a trunk from provide with IP address only, please choose 'service provider' trunk .

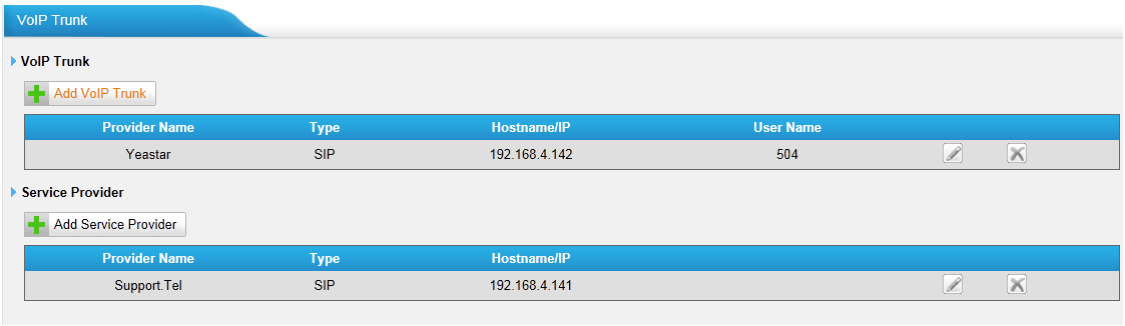

Figure 6-28

6.2.2.1 VoIP Trunk

In this page, we can configure VoIP trunk (SIP/ IAX) you have got from provider with the authorization name and password .

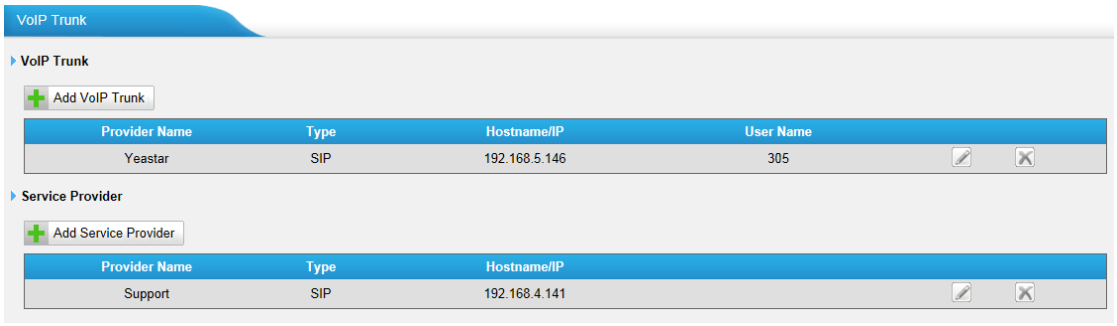

Figure 6-29

1) Add VoIP Trunk

Input correct SIP information (provide by VoIP provider). Inaccurate information will prevent the trunk from registering.

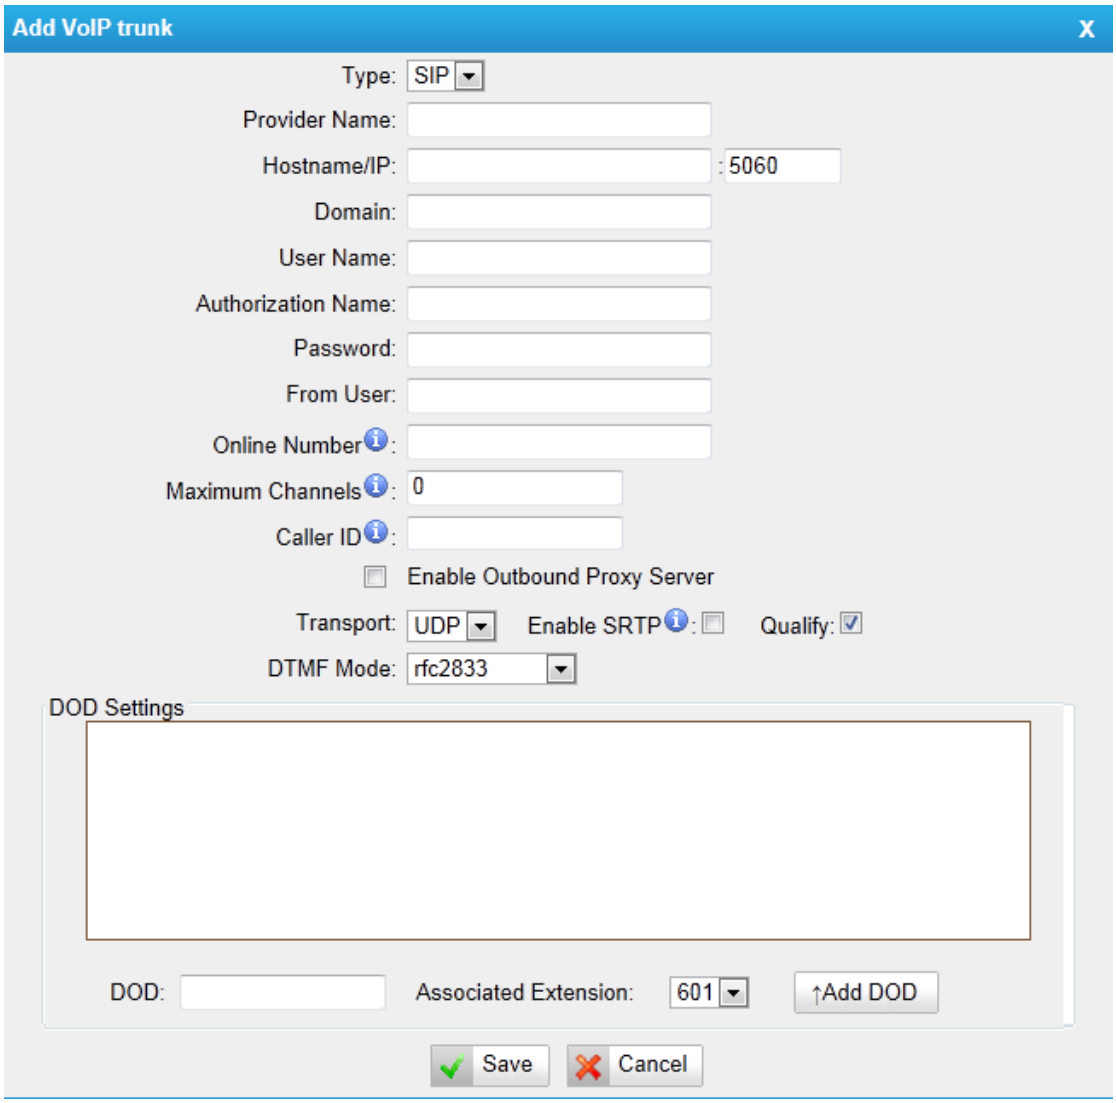

Figure 6-30

·Type

SIP – Identifies whether the trunk sends and receives calls using the VoIP protocol SIP

·Provider Name

A unique label to help you identify this trunk when listed in outbound rules, incoming rules etc. Ex: 'yeastar'.

·Hostname/IP

Service provider's hostname or IP address.5060 is the standard port number used by SIP protocol. Don't change this part if it is not required.

.Domain

VoIP provider's server domain name .

·Username
Username of SIP account . Used for SIP trunk registration.

.Authorization name
Used for SIP authentication. Leave this blank if not required.

·Password
Password of SIP account.

.From User
All outgoing calls from this SIP Trunk will use the From User (In this case the account name for SIP Registration) in From Header of the SIP Invite package. Keep this field blank if not needed

.Online number
Define the online number that expected by 'Skype Connect' and some other SIP service providers. Leave this field blank if not needed.

·Maximum Channels
Controls the maximum number of outbound channels (simultaneous calls) that can be used on this trunk . Inbound calls are not counted against the maximum. Set as 0 to specify no maximum.

·Caller ID
Specify the caller ID to use when making outbound calls over this trunk. The caller ID set in the 'extension' screen will override the caller ID set in the 'VOIP trunk' screen. Please note that not all the service providers support this feature. Contact your service provider for more information.

·Outbound Proxy Server
A proxy that receives requests from a client , even though it may not be the server resolved by the Request-URI.

·Codecs
Define the codec for this sip trunk and its priority
Note: To change the codec type and priority of this trunk, please create it first, it will appear when you edit it again.

·Transport
This will be the transport method used by the SIP Trunk. This method is given by the SIP trunk provider. The options are UDP (default) or TCP or TLS.

·Enable SRTP
Define if SRTP is enabled for this trunk

·Qualify
Send check alive packets to the sip provider.

·DTMF mode
Set default mode for sending DTMF of this trunk. Default setting: rfc2833

·DOD
DOD (Direct Outward Dialing) means the caller ID displayed when dialing out, before configure this, please make sure the provider supports this feature

·Associated Extension
The extension make call out via SIP Trunk will display the associated DOD

2) Add IAX trunk
Input correct IAX information (provided by VOIP provider). Inaccurate information will prevent the trunk from registering.

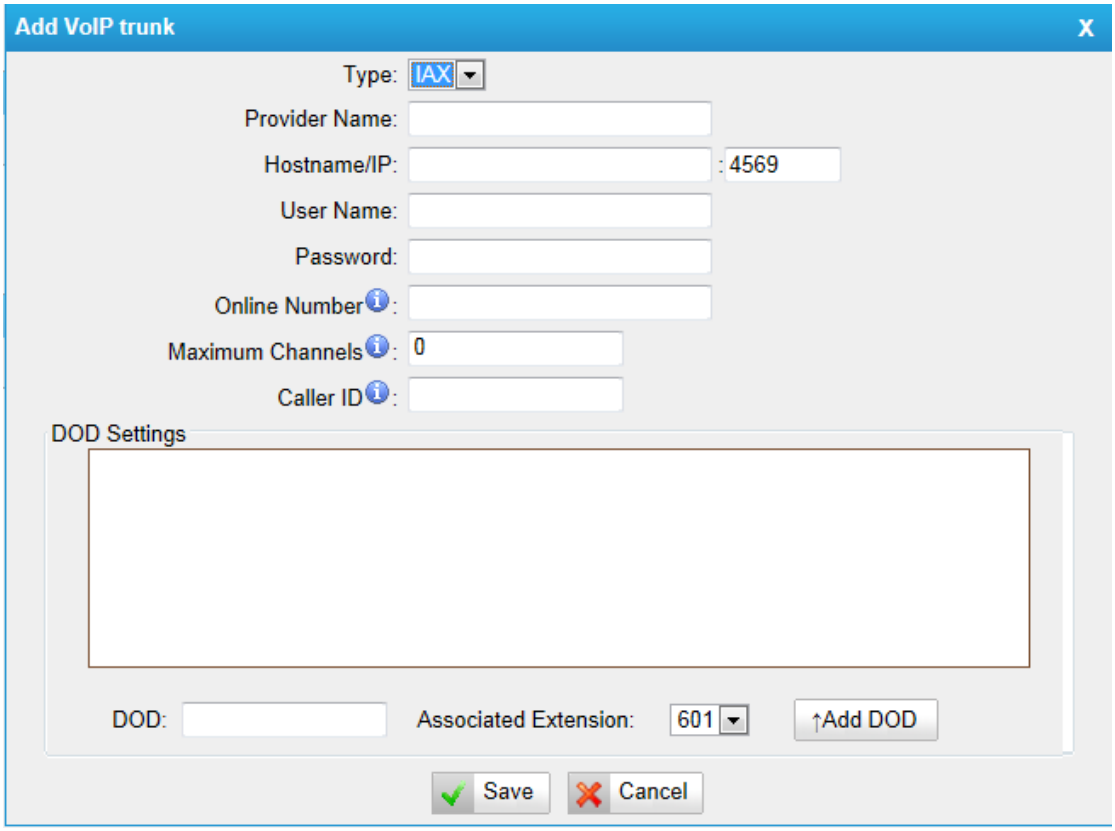

Figure 6-31

·Type
IAX – Identifies whether the trunk sends and receives calls by using the VoIP protocol IAX.

·Provider Name
A unique label to help you identify this trunk when listed in outbound rules, incoming rules etc. Ex: 'yeastar2'.

·Hostname/IP
Service provider's hostname or IP address. 4569 is the standard port number used by IAX protocol. Don't change this part if it is not required.

·Username
Username of IAX account; Used for IAX trunk registration.

·Password
Password of IAX account

.Online number
Define the online number that expected by 'Skype Connect' and some other SIP service providers. Leave this field blank if it's no required.

·Maximum Channels
Controls the maximum number of outbound channels (simultaneous calls) that can be used on this trunk . Inbound calls are not counted against the maximum. Set as 0 to specify no maximum.

·Caller ID
Specify the caller ID to use when making outbound calls over this trunk. The caller ID set in the 'extension' screen will override the caller ID setting in the 'VOIP trunk' screen. Please note that not all the service providers support this feature. Contact your service provider for more information.

·DOD
DOD (Direct Outward Dialing) means the caller ID displayed when dialing out, before configure this, please make sure the provider supports this feature

·Associated Extension
The extension make call out via IAX Trunk will display the associated DOD

6.2.2.2 Service Provider

This is service provider trunk (peer to peer mode), which authorized using IP address only. If you have got a trunk with IP address only, please choose this type

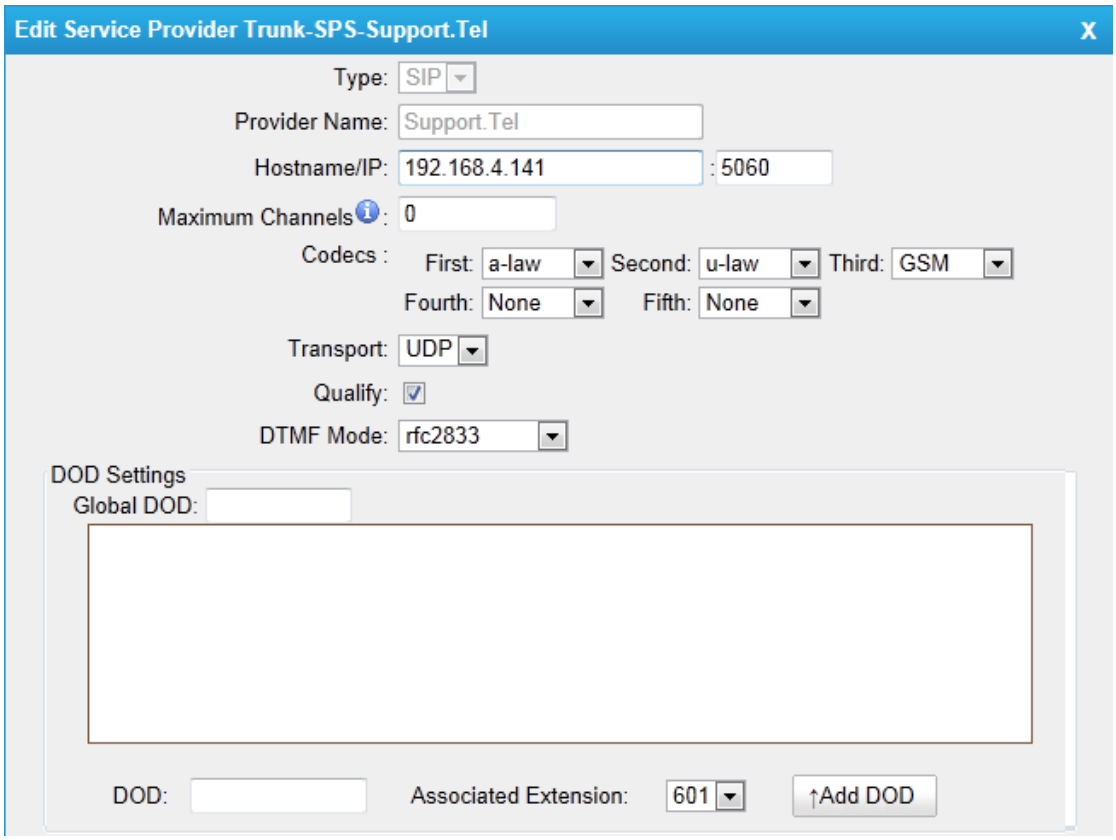

Figure 6-32

·Type

SIP or IAX

SIP – Identifies whether the trunk sends and receives calls by using the VoIP protocol SIP.

IAX - Identifies whether the trunk sends and receives calls by using the VoIP protocol IAX.

·Provider Name

A unique label would help to you identify this trunk. Ex: 'Provider2'.

·Hostname/IP

Service provider's hostname or IP address.

Note: 5060 is the standard port number used by SIP protocol, 4569 is the standard port number used by IAX protocol. Don't change this part if it is not required.

·Maximum Channels

Control the maximum number of outbound channels (simultaneous calls) that can be used on this trunk. Inbound calls are not counted against the maximum. Leave blank to specify no maximum.

·Codecs

Define the codec for this sip trunk and its priority

Note: codec can only display when edit it after creating the trunk.

·Transport

This will be the transport method used by the SIP Trunk. This method is given by the SIP trunk provider. The options are UDP (default) or TCP or TLS.

·Qualify

Send check alive packets to the sip provider.

·DTMF mode

Set default mode for sending DTMF of this trunk. Default setting: rfc2833

·DOD

DOD (Direct Outward Dialing) means the caller ID displayed when dialing out, before configure this, please make sure the provider supports this feature

·Associated Extension

The extension make call out via this Trunk will display the associated DOD.

6.3 Outbound Call Control

6.3.1 Outbound Routes

In this page, we can configure the outbound rules to control the outgoing calls.

Note:

1. The max number of outbound route is 64
2. If the dial patterns are the same in several routes, MyPBX will choose the available routes from top to the last one.
3. When you have created a new extension, please edit the outbound route so that he can dial out too

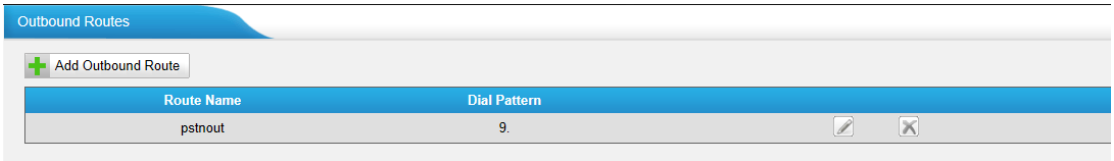

Figure 6-33

We can create outbound route or use the default route 'pstnout' (dial 9+numbers to dial out)

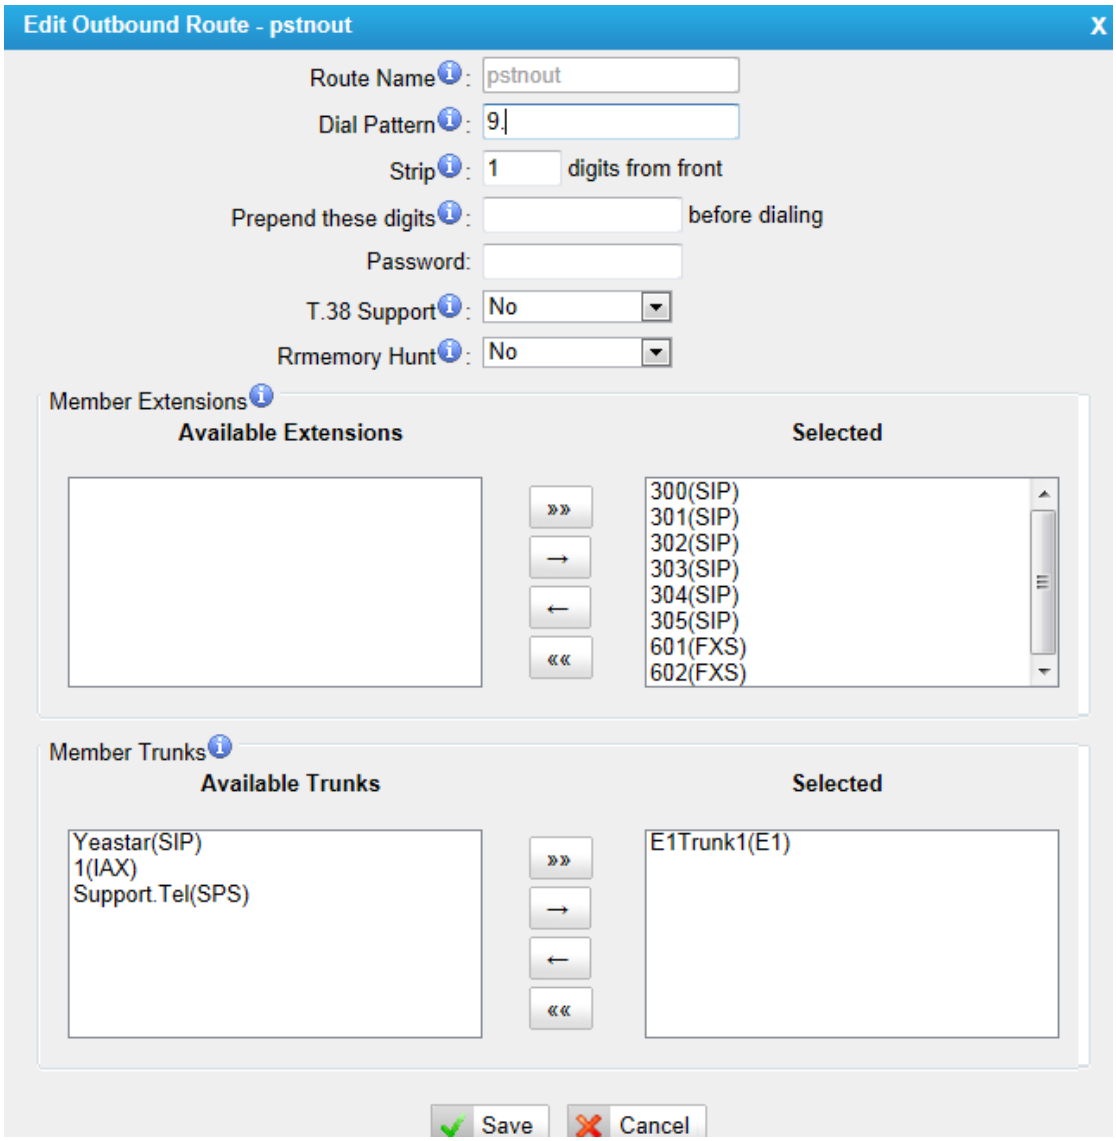

Figure 6-34

·Route Name

Name of this Outbound Route. Ex: 'Local' or 'Long Distance' etc.

·Dial Pattern

Outbound calls that match this dial pattern will use this outbound route. There are a number of dial pattern characters that have special meanings:

X : Any Digit from 0-9

Z : Any Digit from 1-9

N : Any Digit from 2-9

[12345-9] : Any digit in the brackets (in this example, 1,2,3,4,5,6,7,8,9)

The '**.**' Character will match any remaining digits. For example, 9011. will match any phone number that starts with 9011, excluding 9011 itself.

The '**!**' will match none remaining digits, and causes the matching process to complete as soon as it can be determined that no other matches are possible.

Example 1: **NXXXXXX** will match any 7 digits phone number.
Example 2: **1NXXNXXXXX** will match a phone number starting with a 1, followed by a 3-digit area code, and then 6 digit number.

·Strip digits from front
Allows the user to specify the number of digits that will be stripped from the front of the phone number before the call is placed. For example, if users must press 0 before dialing a phone number, one digit should be stripped from the dial string before the call is placed.

·Prepend these digits before dialing
These digits will be prepended to the phone number before the call is placed. For example, if a trunk requires 10 digit dialing, but users are more comfortable with 7 digit dialing, this field could be used to prepend a 3 digit area code to all 7 digit phone numbers before calls are placed.

·Password
The route password can be used to protect this route from being accessed without a password.

·T.38 Support:
Enable T38 fax in this outbound route (Only for SIP Trunk).

·Rrmemory Hunt
Round robin with memory, remembers which trunk was used last time, and then use the next available trunk to call out.

·Member Extensions
Defines the extensions that will be permitted to use this outbound route .

·Member Trunks
Defines the trunks that can be used for this outbound route .

6.3.2 Speed Dial Settings

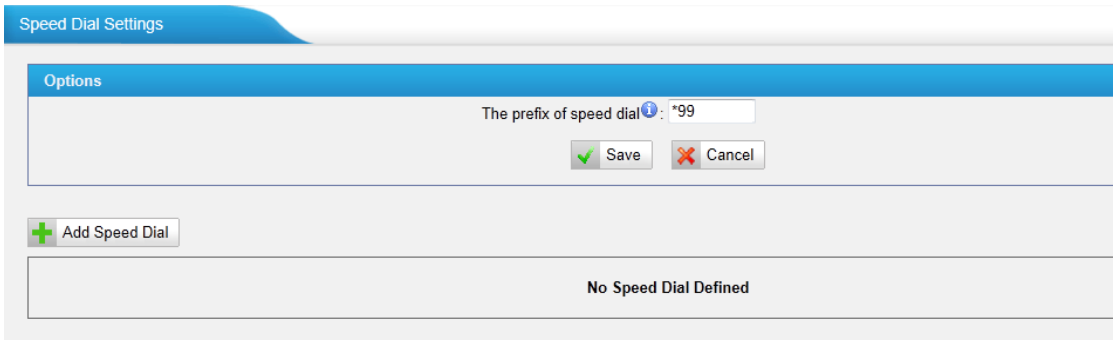

Figure 6-35

1) Options

·The prefix of speed dial

The prefix should be dialed before the speed dial number. Default is *99

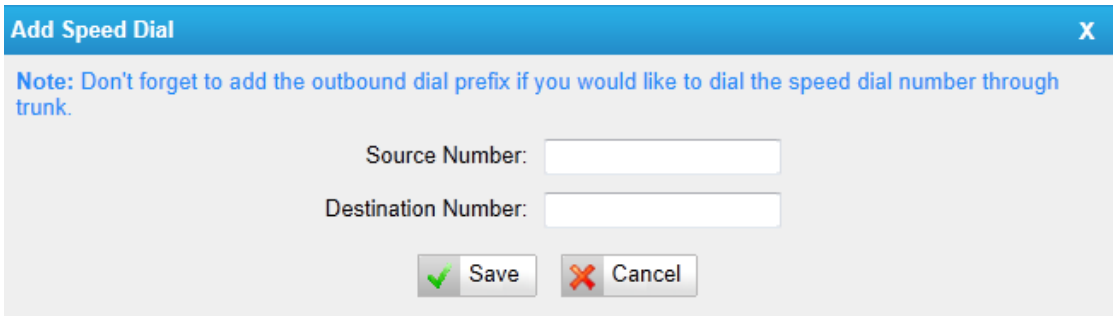

Figure 6-36

2) Add new speed dial.

·Source Number

The speed dial number.

·Destination Number

The number you want to call.

e.g. The source number is ”123”. The destination number is 5503305.The prefix number is *99.You can use an extension with any type to dial *99123, then it will call to number 5503305.

Note: Don’t forget to add the outbound dial prefix if you would like to dial the speed dial number through trunk.

6.4 Inbound Call Control

In this page, we can configure the details of IVR, ring group, queue and inbound routes.

6.4.1 IVR

When there's an inbound call aims at Auto Attendant, MyPBX will play an IVR recording and route the caller to the requested destination (for example, 'Welcome to XX company, for sales press 1, for technical support press 2, for operator press 0, etc'). The system will transfer the call to corresponding extension according to DTMF digits inputted by the user

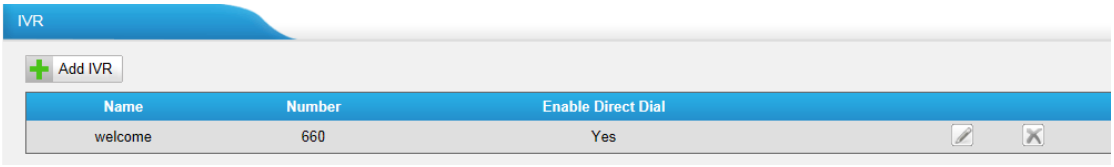

Figure 6-37

There is a default IVR here, we can edit it directly or add IVR by yourself

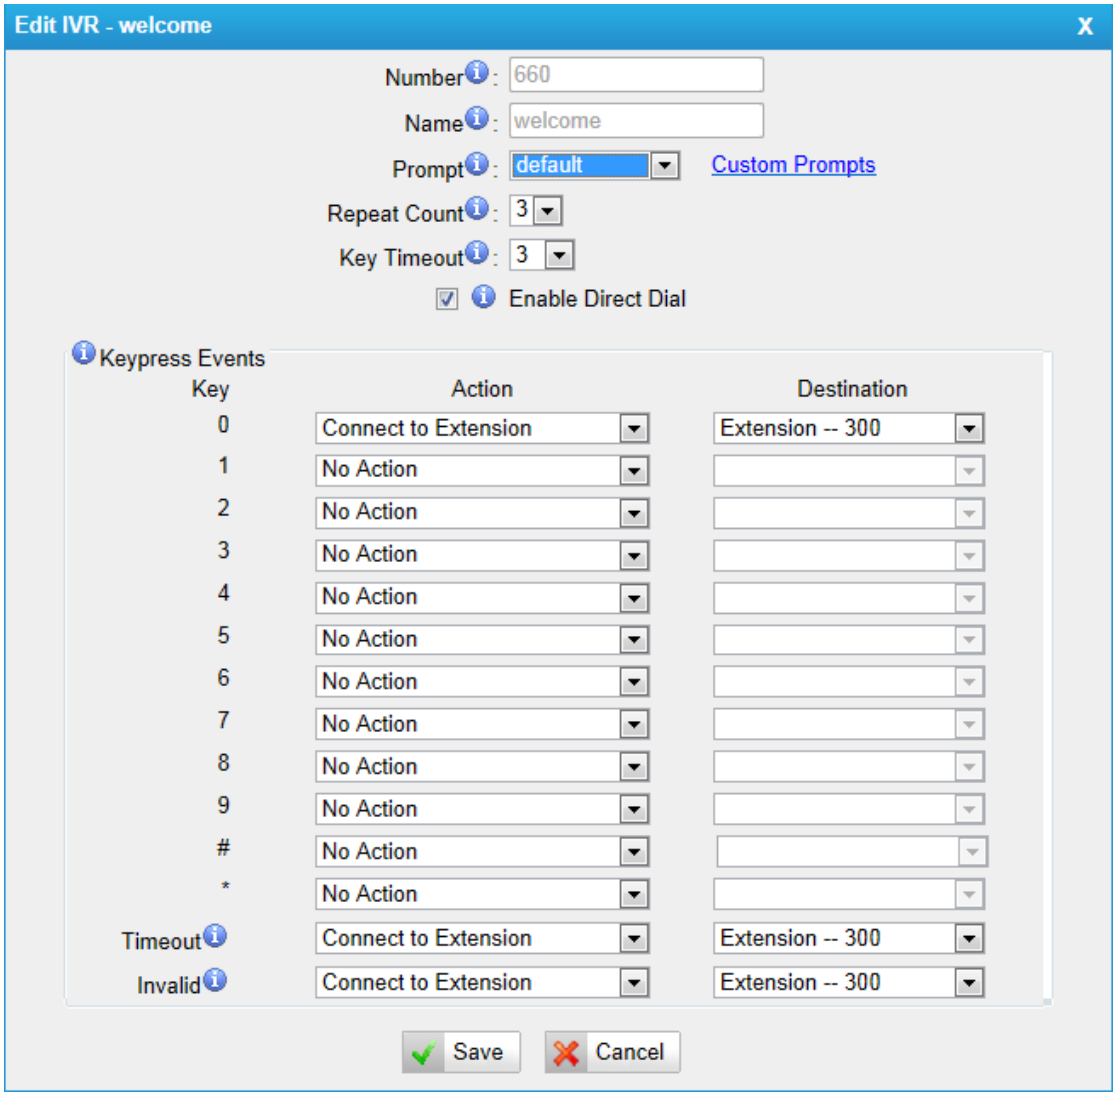

Figure 6-38

·Number

MyPBX treats IVR as an extension; you can dial this extension number to reach the IVR from internal extension.

·Name

A name for the IVR

·Prompt

The prompt recording that will be played when this IVR is reached.

·Repeat Count

The number of times that the selected IVR prompt will be played.

·Key Timeout

Wait for the user to enter a new extension for a specified number of seconds.

·Enable Direct Dial
Allow the caller to dial other extensions number directly.

·Key Press Events
A list of actions that can be performed depending on the digit dialed by the user .

·Key
The Key pressed when the callers hear the IVR prompt.

·Action
When the callers press the corresponding key, the action MyPBX executes.
No Action: Do nothing
Connect to Extension: Connect the call to an extension.
Connect to Voicemail: Connect the call to the voicemail of an extension
Connect to RingGroup: Connect the call to a ringgroup.
Connect to IVR:Connect the call to an IVR.
Connnect to Conference Room: Connect the call to a conference room.
Connect to DISA:Connect the call to a DISA.
Connect to Queue:Connect the call to a queue.
Connect to Faxes:Connect the call to Faxes of extensions.
Dial by Name:The callers can dial the name of an extension to connect to the corresponding extension.
Hung up: Hung up the call.

·Destination
Where will MyPBX route the call when the action occurs.

·Time Out
Defines the timeout action . A timeout occurs after the IVR prompt has finished playing for the number of times specified by the 'Repeat Count' field.

·Invalid
Defines the invalid action . The invalid action is triggered if the user enters a DTMF digit that is not defined for this IVR.

6.4.2 Ring Groups

Ring groups can be configured to balance the call traffic for multiple users and give callers a higher level of availability for incoming calls. Multiple ring methods and voicemail are supported.
Note: follow me feature in extension page will not take effect when it’s ringing as an agent

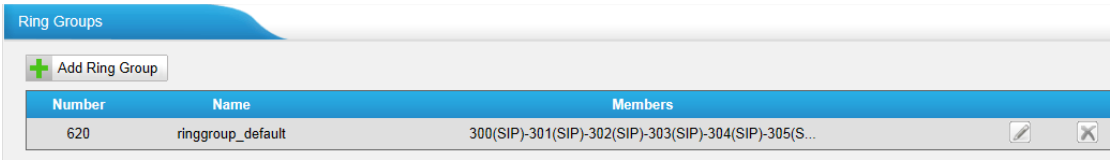

Figure 6-39

There is a default ringgroup, you can edit it or create a new one

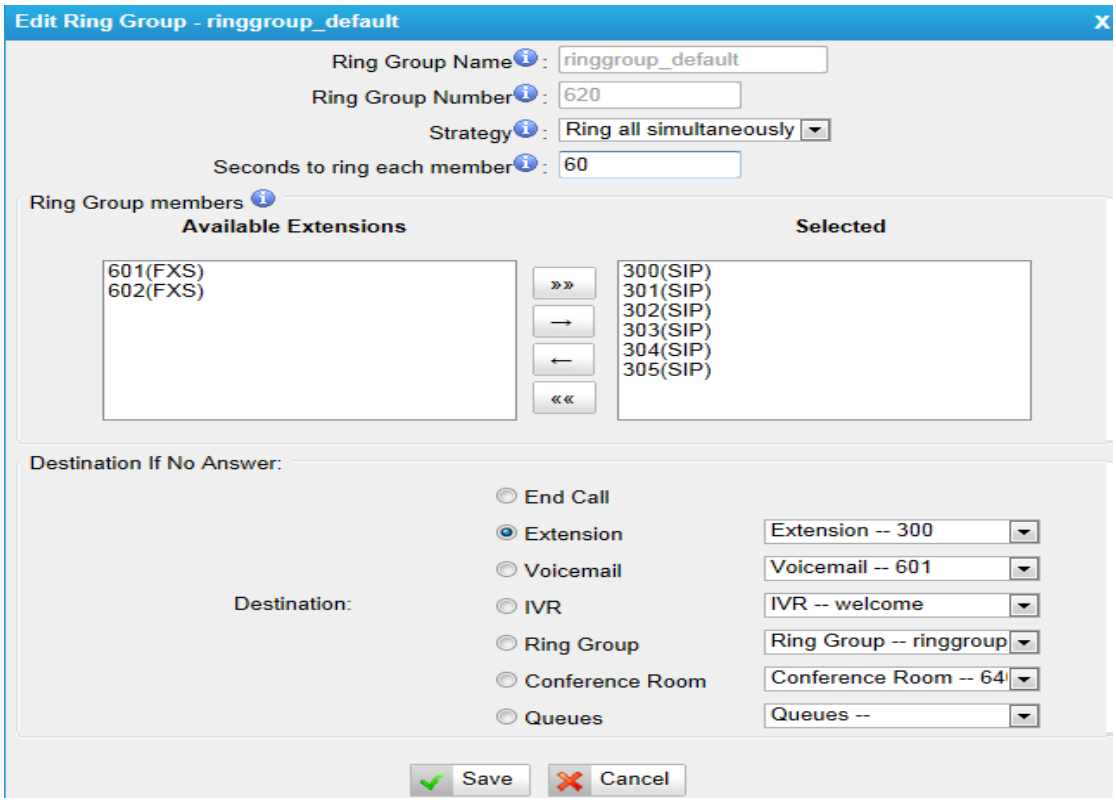

Figure 6-40

·Ring Group Name

This option defines a name for this group, i.e. 'Sales'. 'Ring Group Name' is a label to help you identify this group in the group list.

·Ring Group Number

This option defines the numbered extension that can be dialed to reach this group.

·Strategy

This option sets the Ringing Strategy for this Group. The options are as follows:

1. Ring All Simultaneously: Ring all available Extensions simultaneously.
2. Ring Sequentially: Ring each extension in the group one at a time.

·Seconds to ring each member

1. If the strategy is 'Ring All Simultaneously', it means set the number of

seconds to ring this group before routing the call according to the 'Destination if No Answer' settings.
2. If the strategy is 'Ring Sequentially', it means set the number of seconds to ring a single extension before moving onto the next one.

· Ring Group Members
An extension can be made a member of this ring group by moving it into the 'Selected' box.

·Destination If No Answer
When all members on this group fail to answer the call, system will handle the call according to the selected destination.

6.4.3 Queues

Call Queues give users (i.e. call centers) an efficient means to have their calls answered in the order they were received to deliver top tier customer service.

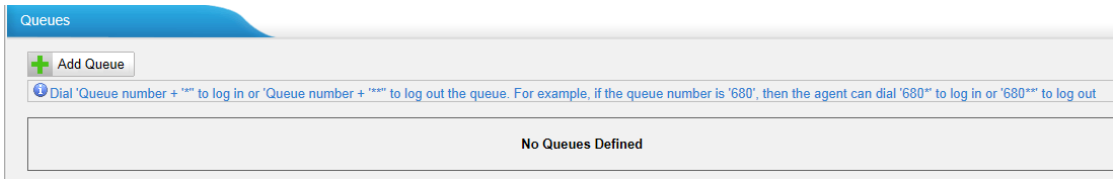

Figure 6-41

Call queues allow calls to be sequenced to one or more agents.
Note:
1. Dial 'Queue number + '*'' to log in or 'Queue number + '**'' to log out the queue. For example, if the queue number is '680', then agent can dial '680*' to log in or '680**' to log out.
2. Follow me feature in extension page will not take effect when it's ringing as an agent of queue

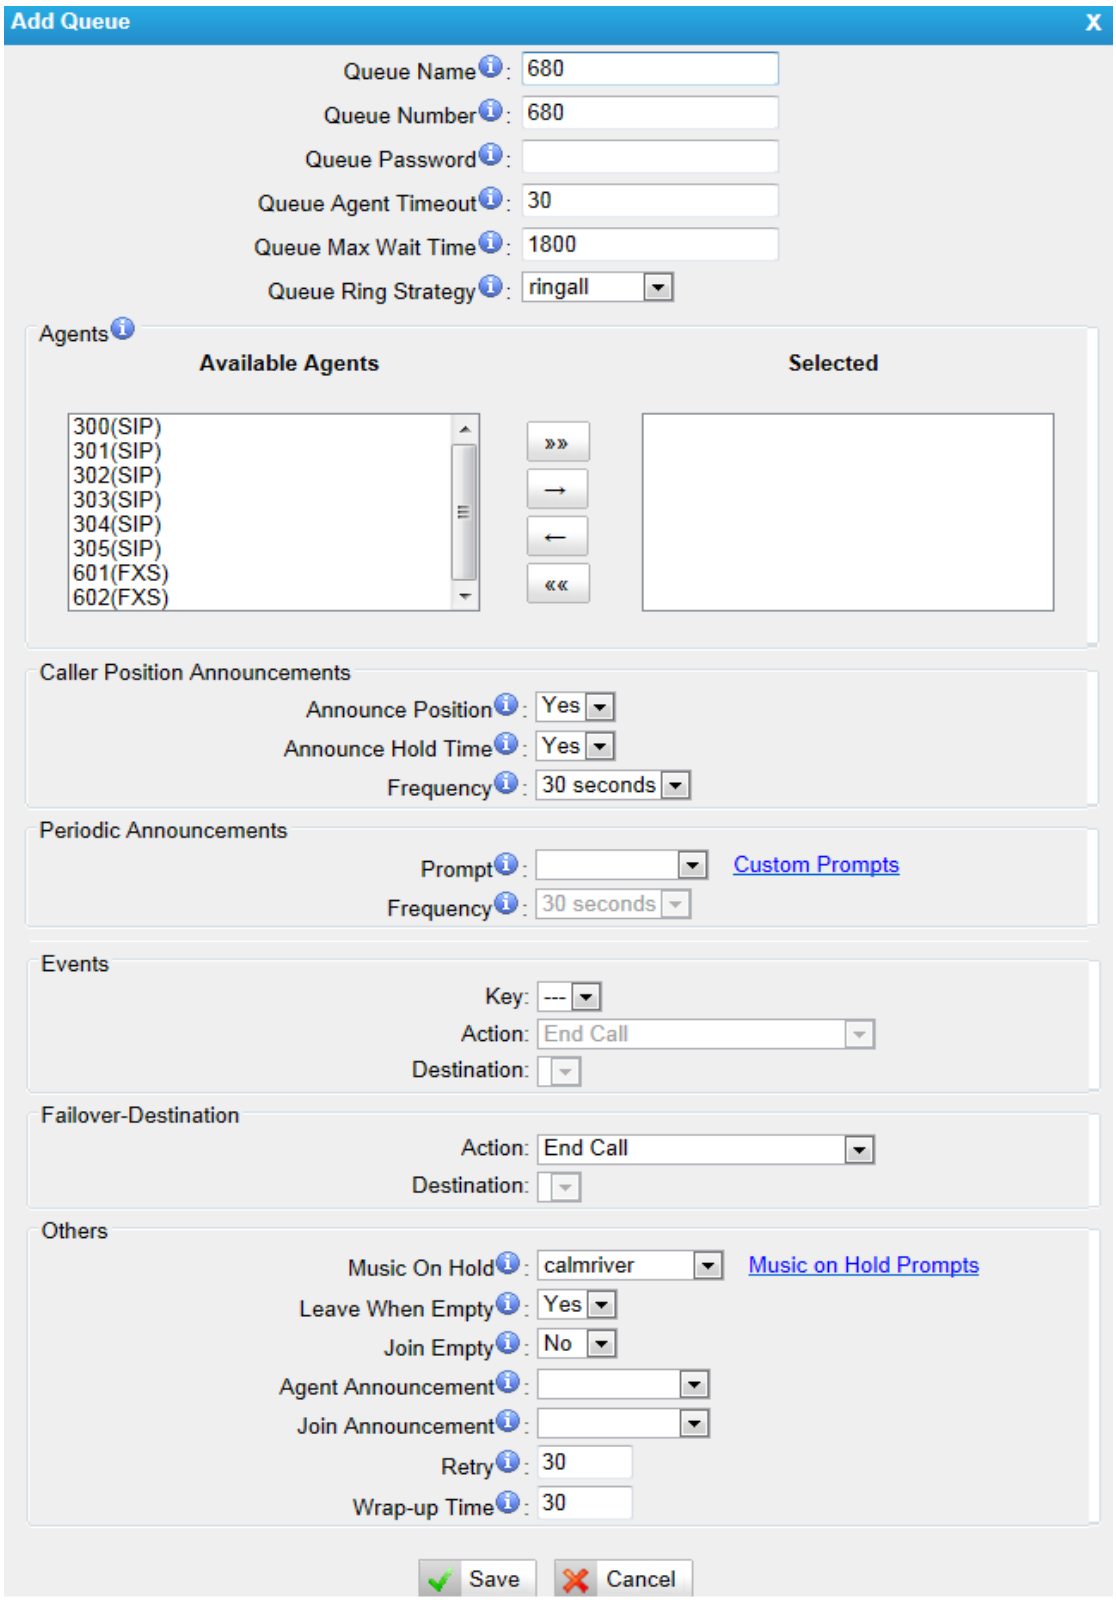

Figure 6-42

·Queue Name

A name for the Queue.

·Queue Number
Use this number to dial into the queue, or transfer callers to this number to put them into the queue.

·Queue Password
You can require agents to enter a password before they can login to this queue.

·Queue Agent Timeout
The number of seconds an agent's phone can ring before we consider it a timeout.

·Queue Max Wait Time
The maximum number of seconds a caller can wait in a queue before being pulled out. (0 for unlimited).

·Queue Ring Strategy
This option sets the Ringing Strategy for this Queue. The options are
RingAll: Ring All available Agents simultaneously until one answers.
LeastRecent: Ring the Agent which was least recently called.
FewestCalls: Ring the Agent with the fewest completed calls.
Random: Ring a Random Agent.
RRmemory: Round Robin with Memory, Remembers where it left off in the last ring pass".

1) Agents
This selection shows all users. Selecting a user here makes them a agent of the current queue.

2) Caller Position Announcements
·Announce Position
Announce position of caller in the queue

·Announce Hold Time
Enabling this option causes MyPBX to announce the hold time to the caller periodically based on the frequency timer. Either yes or no; hold time will not be announced if <1 minute.

·Frequency
How often to announce queue position and estimated hold time.
Note: '0 seconds' means disable the announcement
3) Periodic Announcements
·Prompt
Select a prompt file to play periodically.

·Frequency
How often to announce a prompt to the caller.

4) Events
If a caller presses the key while waiting in the queue, this setting selects which action should process the key press.

5) Failover-Destination
Defines the failover action. A failover occurs after the user reach the Queue max wait time.

6) Others
·Music On Hold
Select the 'Music on Hold' Class for this Queue.

·Leave When Empty
This option controls whether callers already on hold are forced out of a queue that has no agents. There are two options.
Yes: Callers are forced out of a queue when no agents are logged in.
No: Callers will remain in a queue with no agents.

·Join Empty
This option controls whether callers can join a call queue that has no agents. There are two options,
Yes: Callers can join a call queue with no agents or only unavailable agents
No: Callers cannot join a queue with no agents
The default option is No.

·Agent Announcement
Announcement played to the Agent prior to bridging in the caller.

·Join Announcement
Announcement played to callers once prior to joining the queue.

·Retry
The number of seconds we wait before trying all the phones again.

·Wrap-up time
How many seconds after the completion of a call an Agent will have before the Queue can ring them with a new call. The default is 30.

6.4.4 Conferences

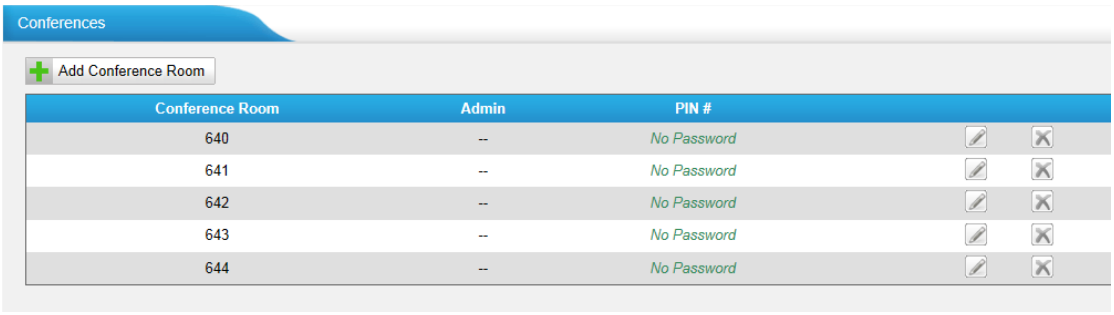

Figure 6-43

Conference Calls increase employee efficiency and productivity, and provide a more cost-effective way to hold meetings. Conference agents can dial * to access to the settings options and the admin can kick the last user out and can lock the conference room.

·Extension

This is the number dialed to reach this Conference Room.

·Admin

Admin can kick a user out and can lock the conference room.

·Pin #

Set a PIN # that must be entered in order to access this conference room (i.e. 1234).

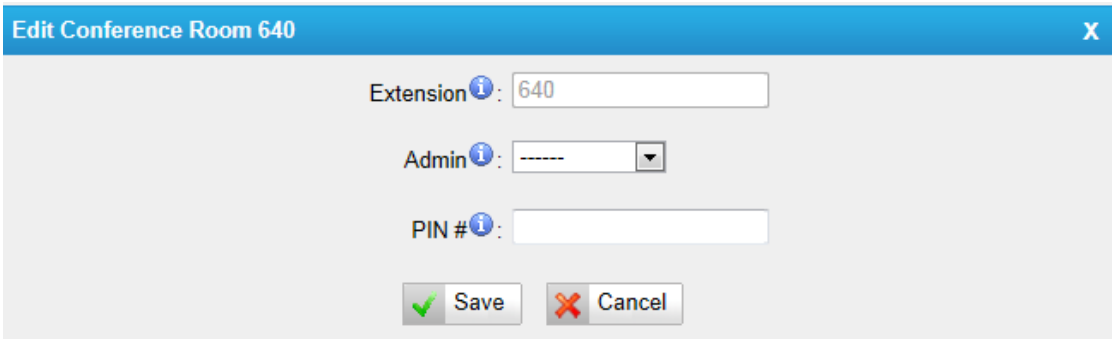

Figure 6-44

6.4.5 Inbound Routes

Inbound routing processes incoming call traffic to destination extensions during office hours or outside office hours

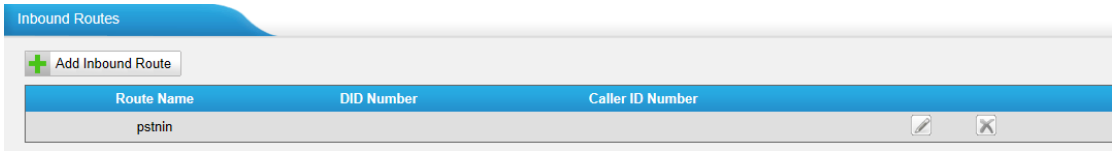

Figure 6-45

There is a default inbound route for all the trunks and set IVR as the destination, you can edit it or create a new one for your demands. When an incoming call arrives, the system will first check 'fax detection', then 'Holidays', at last 'Business Days'.

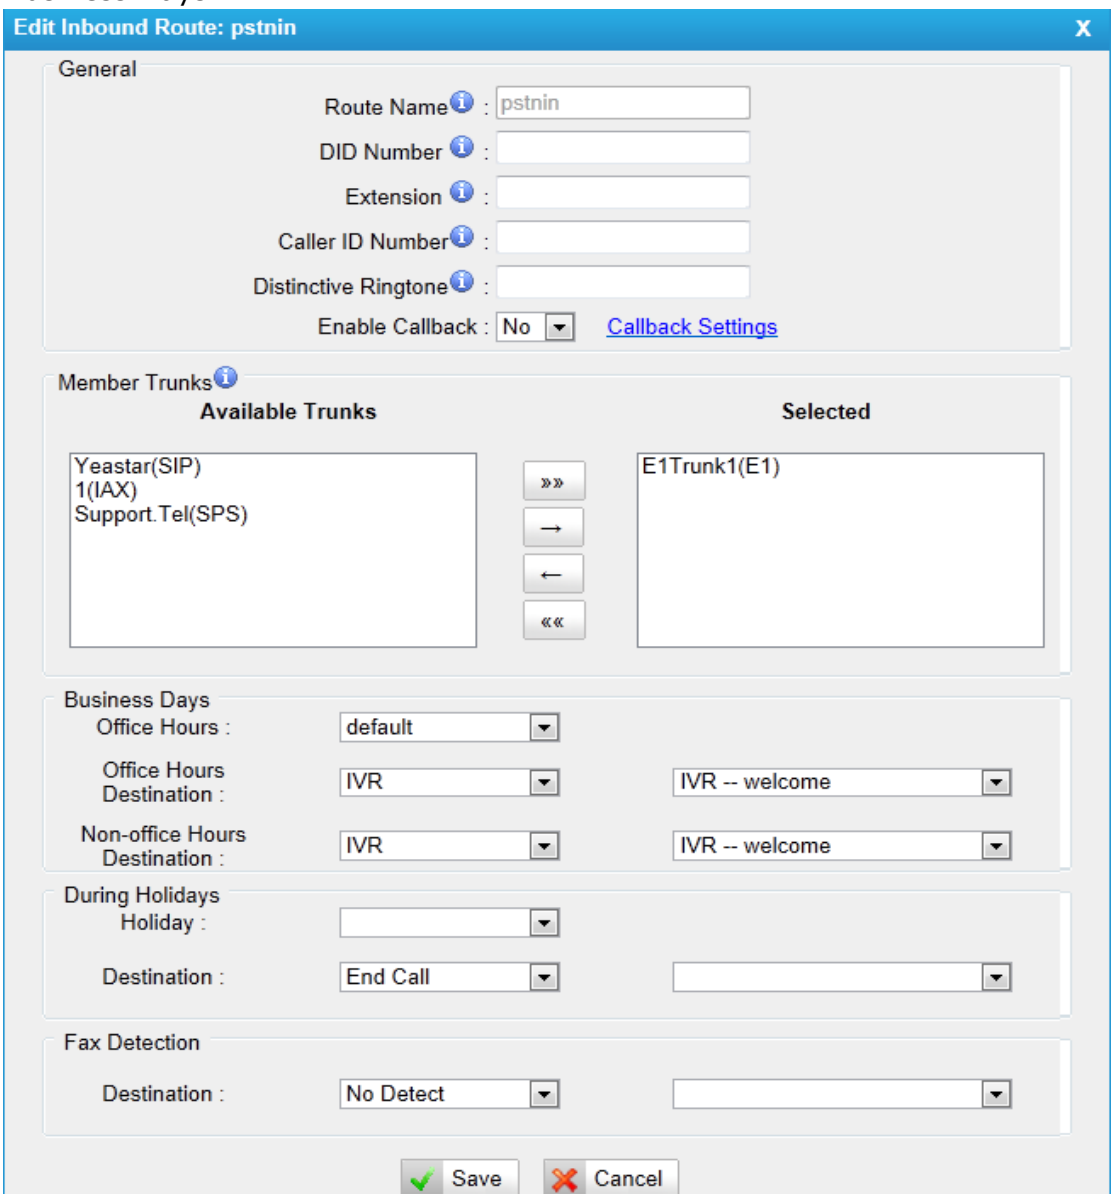

figure 6-46

1） General

·Route Name

A name for this inbound route. Ex: 'pstnin' etc.

·DID Number

Define the expected DID Number if this trunk passes DID on incoming calls. Leave this field blank to match calls with any or no DID info. You can also use pattern matching to match a range of numbers. The following patterns may be used:

X : Any Digit from 0-9

Z : Any Digit from 1-9

N : Any Digit from 2-9

[12345-9] : Any digit in the brackets (in this example, 1,2,3,4,5,6,7,8,9)

The '**.**' Character will match any remaining digits. For example, 9011. will match any phone number that starts with 9011, excluding 9011 itself.

The '**!**' will match none remaining digits, and causes the matching process to complete as soon as it can be determined that no other matches are possible.

Example 1: **NXXXXXX** will match any 7 digits phone number.

Example 2: **1NXXNXXXXX** will match a phone number starting with a 1, followed by a 3-digit area code, and then 6 digit number.

For more information, please refer to **Appendix G How to Use DID.**

·Extension

Define the extension for DID number. This field is only valid when you use BRI, SIP, SPS or SPX trunk for this inbound router. You can only input number and '-'in this field, and the format can be xxx or xxx-xxx. The count of the number must be only one or equal the count of the DID number.

·Caller ID Number

Define the Caller ID Number to be matched on incoming calls. Leave this field blank to match any or no DID info.

You can also use a pattern match (e.g. 2[345]X) to match a range of numbers. The following patterns may be used:

X : Any Digit from 0-9

Z : Any Digit from 1-9

N : Any Digit from 2-9

[12345-9] : Any digit in the brackets (in this example, 1,2,3,4,5,6,7,8,9)

The '**.**' Character will match any remaining digits. For example, 9011. will match any phone number that starts with 9011, excluding 9011 itself.

The '**!**' will match none remaining digits, and causes the matching process to complete as soon as it can be determined that no other matches are possible.

Example 1: **NXXXXXX** will match any 7 digits phone number.
Example 2: **1NXXNXXXXX** will match a phone number starting with a 1, followed by a 3-digit area code, and then 6 digit number.

·Distinctive Ringtone
MyPBX support mapping to custom ring tone files. For example, if you configure the distinctive ringing for custom ring tone to '**Family**', the ring tone will be played if the phone receives the incoming call.

·Enable Callback
You can enable the callback function of this inbound route. If you want to configure the callback function, please refer to **chapter 3.5.12**

How do I configure distinctive ring tones? Please refer to APPENDIX E.
Currently distinctive ringtone can be compatible with Yealink and Snom phone.

2） Member Trunks
This area allows you to select which trunks will be member trunks for this route. To make a trunk a member of this route, please move it to the 'Selected' box.

3） Business Days
Define where the calls will be routed during Business Days.

·Office Hours
Select one defined business days office hours.

·Office Hours Destination
Configure where to route the incoming calls during office hours.

·End Calls
Route the incoming calls to end calls, System will auto hang-up the call.

·Extension
Route the incoming calls to a specific extension.

·Voicemail
Route the incoming calls to extension's voicemail.

·IVR
Route the incoming calls to a specific IVR.

·Ring Group
Route the incoming calls to a specific Ring Group.

·Conference Room
Route the incoming calls to a specific Conference Room.

·DISA
Route the incoming calls to a specific DISA.

·Queues
Route the incoming calls to a specific Queue.

·Faxes
Route the incoming faxes to a specific extension's mail address.
Note: This function only supports T.38 faxes.

·Outbound Routes
Route the incoming calls to a specific outbound route.

This function is mainly used for the connection of two branches.
For example: Company A locates headquarters in the USA with a branch B in China. A and B both have MyPBX phone systems.
Now if staff of A would like to make a call to a telephone or mobile phone in China from the extension of A but via the FXS line of B, that can be done by this configuration.

·Non-office Hours Destination
Configure where to route the incoming calls during non-office hours.

4） During Holidays
Define where the calls will be routed during Holidays.

·Holiday
Select which defined Holiday to use. When a time is defined in both Business Days and Holidays, it will be treated as Holidays.

·Destination
Configure where to route the incoming calls during holidays.

5） Fax Detection
Configure if detecting faxes in this inbound route.

Note: Please choose IVR as the destination above before configure fax detection (recommend)
·Destination
Configure where the faxes will be routed when faxes are detected.

·No detect
Do not detect faxes.

·Custom Email
Customize an E-mail address to receive the faxes. You should first configure the 'Voicemail Settigns->SMTP Settings for Voicemail' correctly before you use this option.

·Faxes
Send faxes to an extension. If choosing a FXS extension here, the fax will be sent to the FXS port selected, you should connect a fax machine to this FXS port. If Choosing a VoIP extension, the fax will be sent to the extension's voicemail as an attachment.

Note: If you receive faxes with custom Email address, the 'SMTP settings' of 'Voicemail Settings' should be configured successfully in advance. If you receive faxes with E-mail address configured in VOIP extension voicemail, you should first make sure the tested email to your email address works fine.

6.5 Audio Settings

It's allowed to customize the prompts in MyPBX, including the Audio In and change the system prompts to your local country.

6.5.1 Custom Prompts

We can record or upload the prompts in this page, you can also play it directly to confirm if it's a valid one, you can also download it and save it as an backup

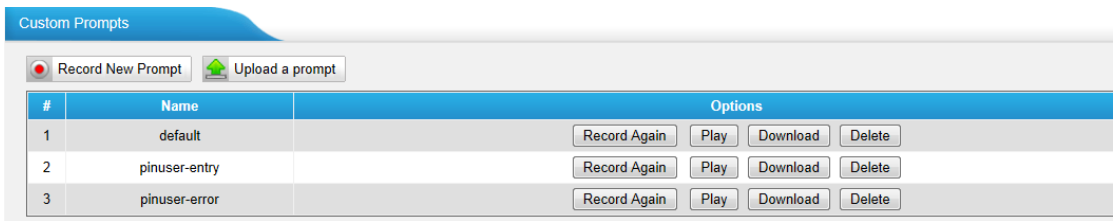

Figure 6-47

1. Record new Prompt

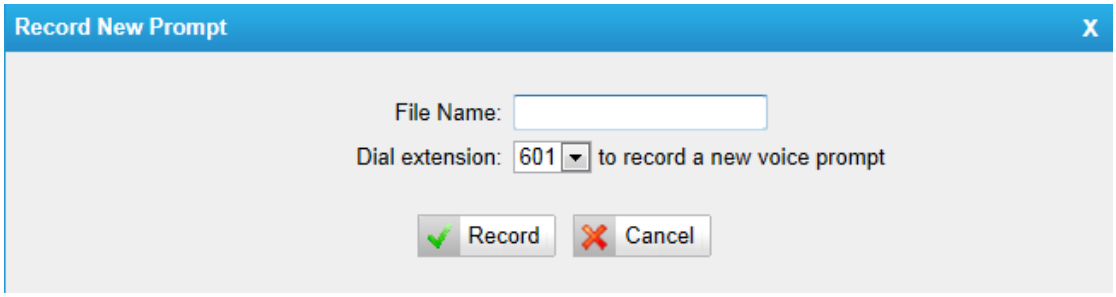

Figure 6-48

The administrator can use this screen to record custom prompts by doing the following:
1）Click 'Record New Custom Prompt'
2) Input the desired file name on the popup window and choose an extension to call for recording (such as 500).
3) Click 'Record'. The selected extension will ring and you can pick up the phone to start recording.

2. Upload Prompt

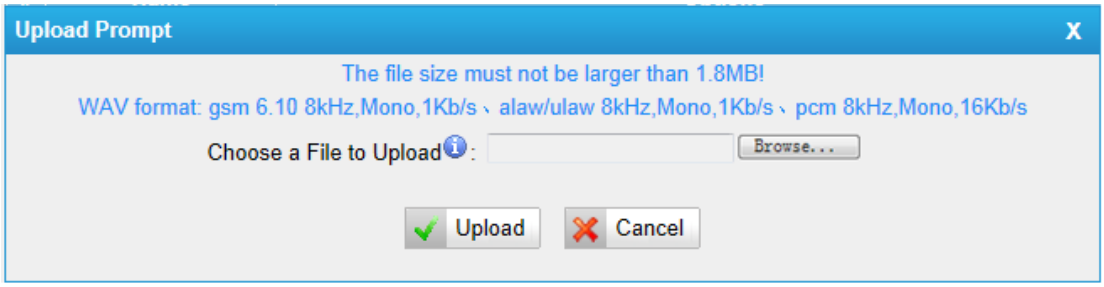

Figure 6-49

The administrator can also upload prompts by doing the following:
1)）Click 'Upload Prompt'.
2) Click 'Browse' to choose the desired prompt.
3) Click 'Upload' to upload the selected prompt.

Note: The file size must not be larger than 1.8MB, and the file must be WAV format:
GSM 6.10 8kHz, Mono, 1Kb/s;
Alaw/Ulaw 8kHz, Mono, 1Kb/s;
PCM 8kHz, Mono, 16Kb/s.

6.5.2 Music on Hold Prompts

In this page, we can upload the music on hold prompts or adjust the volume from Audio In interface (Only available in MyPBX U5XX)

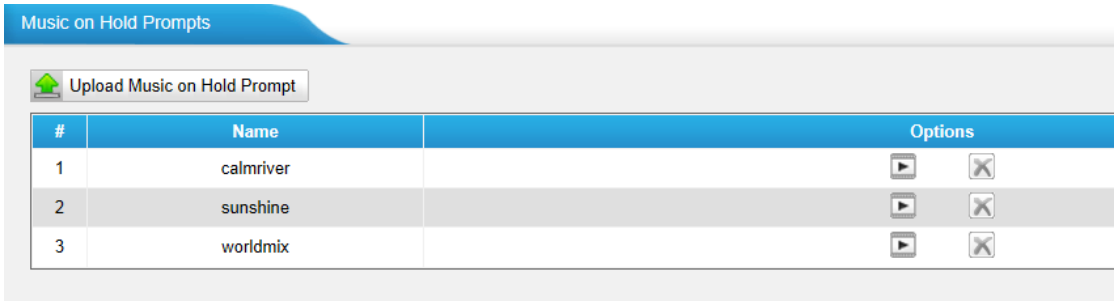

Figure 6-50

The administrator can upload on hold music as follows:
1) Click 'Upload Music on Prompt '
2) Click 'Browse' to choose the desired audio file.
3) Click 'Upload' to upload the selected file.

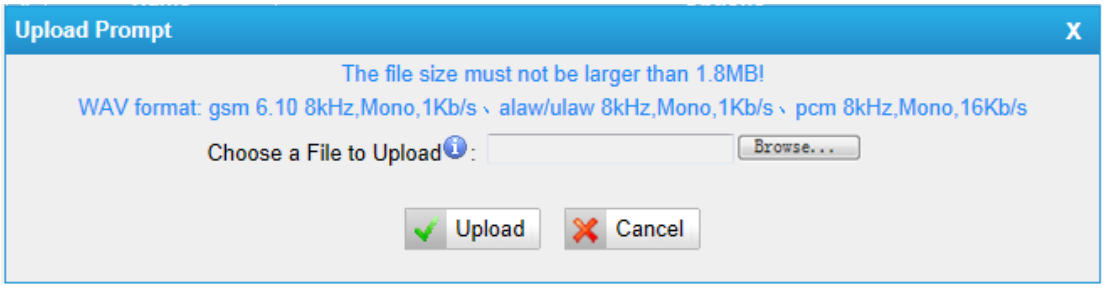

Figure 6-51

Note: The file size must not be larger than 1.8MB, and the file must be WAV format:
GSM 6.10 8kHz, Mono, 1Kb/s;
Alaw/Ulaw 8kHz, Mono, 1Kb/s;
PCM 8kHz, Mono, 16Kb/s.

6.5.3 System Prompts Settings

MyPBX have prompts of many languages. You can download the appropriate language you need. MyPBX can support American English, Australian English, Chinese, Dutch, French, Canadian French, German, Greek, Hungarian, Italian, Polish, Portuguese, Brazilian Portuguese, Russian, Spanish, Mexican Spanish, Turkish, Thai, Korean currently.

Note:

1. Auto-detection is highly recommended. But if you prefer to download via HTTP or TFTP server, please contact the local dealer for the prompts
2. When update successfully, just click 'apply the changes' on web then it will

take effect, there is no need to reboot.

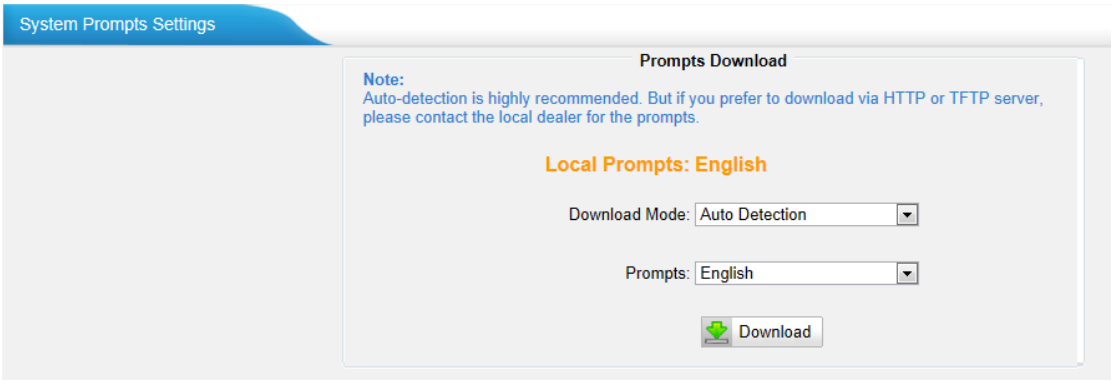

Figure 6-52

6.6 Basic Settings

There are some basic settings we need to configure MyPBX U5XX,like the general preferences, business hours, feature codes, voicemail settings

6.6.1 General Preferences

In this page, there are some general settings of MyPBX

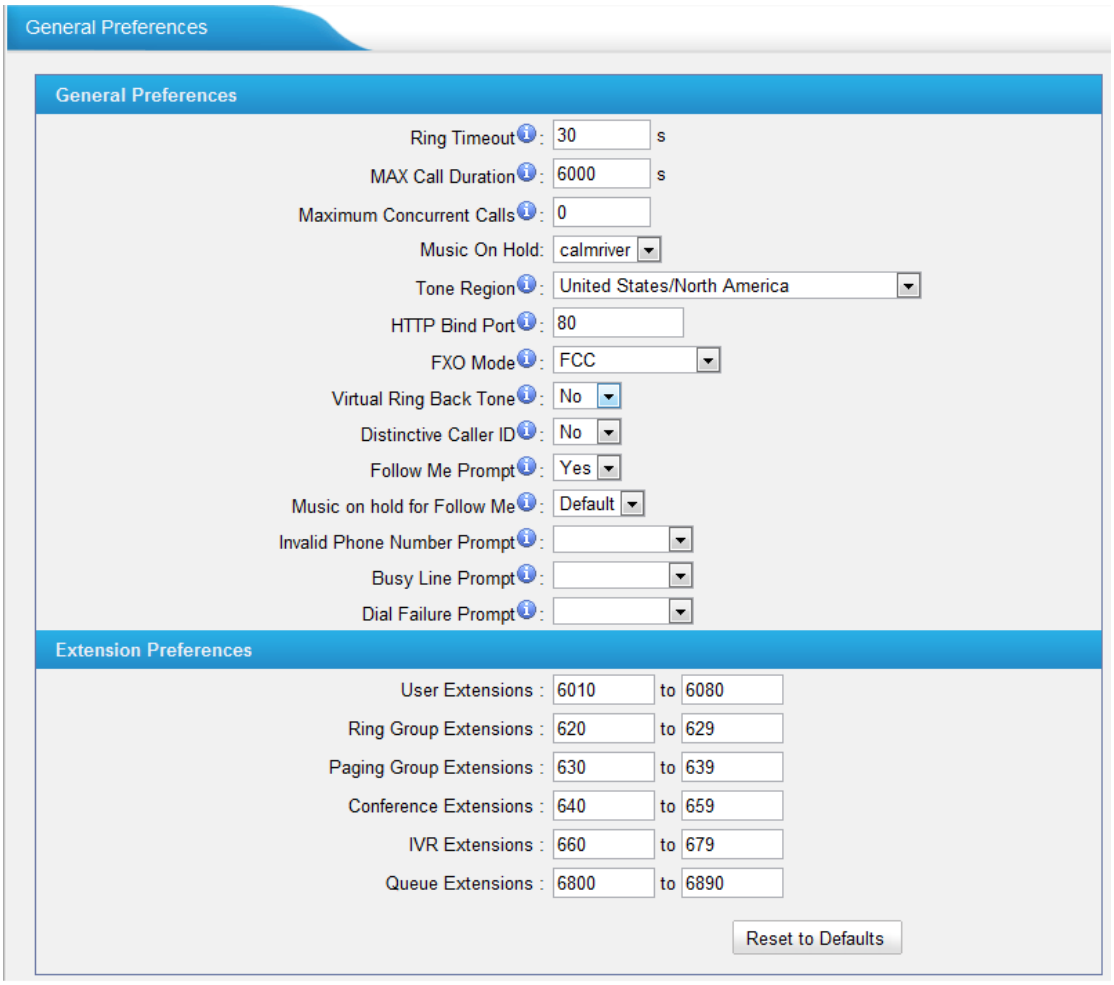

Figure 6-53

1) General

·Ring Timeout

Number of seconds to ring a device before handling the call as per the extension's Follow Me settings . Default value is 30s.

.MAX call duration

The absolute maximum amount of time permitted for a call. A setting of 0 disables the timeout. Default value is 6000s.

.Maximum concurrent calls

Maximum concurrent calls limits. Default value 0 means no limit

·Music on hold

Used to set hold music for the system.

·Tone Region

Please select your country or nearest neighboring country to enable the default dial tone, busy tone, and ring tone for your region.

Note: please reboot the system to take it effect.

·HTTP bind port/Web Access Port
Port to use for HTTP sessions; Default: 80
Note: please reboot the system to take it effect.

·FXO Mode
FXO port's operation mode .

·Virtual Ring Back Tone
It's only for GSM /UMTS trunk. Once enabled, when the caller call out with GSM/UMTS trunks, the caller will only hear the virtual ring back tone generated by the system before callee answers the call.

· Distinctive Caller ID
When incoming calls are routed from ring group/queue/IVR, the caller ID displays with the name of ring group/queue/IVR , for example 5503302(ringgroup_default)

Note: To display IVR's name, please press the key instead of the extension number directly.

·Follow Me Prompt
When set Follow me to Transfer to number on the extension page (e.g. when 500 is busy, transfer to 501), while 500 is busy, the call will be transferred to 501. If 'Enable Follow Me Prompt' choosing yes, there will be prompt 'please wait while trying to look at the person you are calling' before transferring the call. Otherwise, the call will be transferred directly without any prompt. Default: Yes.

·Music on hold for Follow Me
Choose to play default music-on-hold, ringing tone or stay mute while 'Follow Me'.

·Invalid Phone Number Prompt
Configure the prompt when the dialed phone number is invalid.

·Busy Line Prompt
Configure the prompt when the dialed phone number is busy.

·Dial Failure Prompt
Configure the prompt when dial failed due to conjunction no-available channel.

2) Extension Preferences

·User Extensions
The default value is 500 to 616

·Ring Group Extensions
The default value is 620 to 629

·Paging Group Extensions
The default value is 630 to 639

·Conference Extensions
The default value is 640 to 659

·IVR Extensions
The default value is 660 to 679

·Queue Extensions
The default value is 680 to 689

6.6.2 Business Hours

Business hours including 'holiday configuration' is used to control the incoming calls, we can configure it in this page.

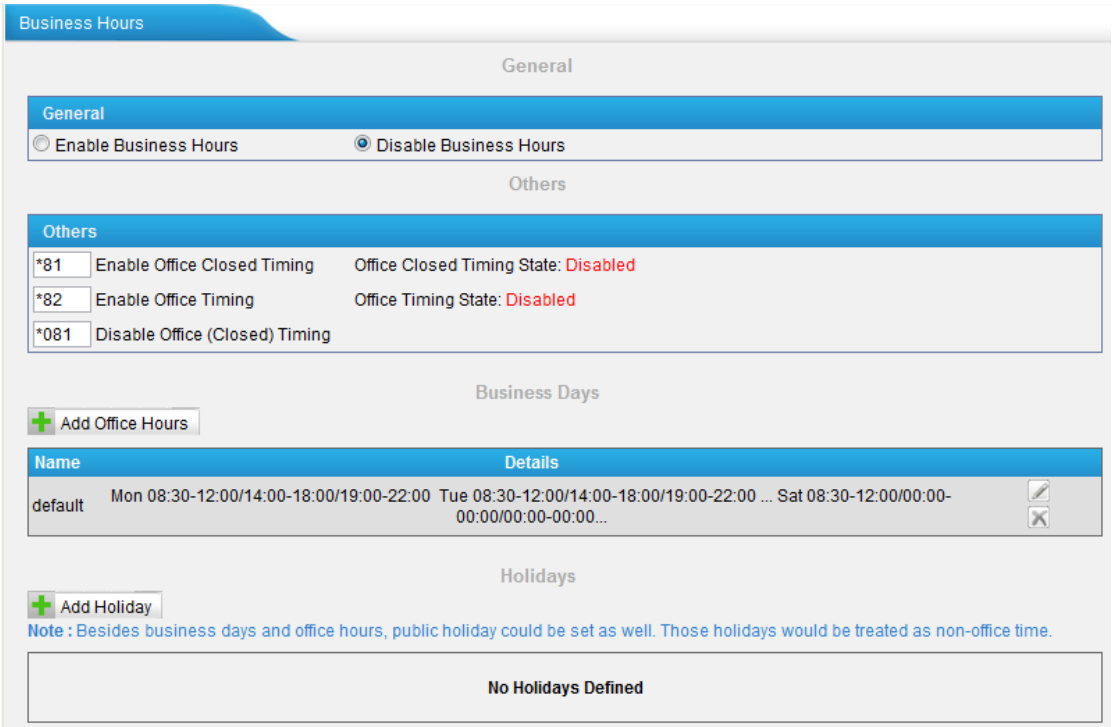

Figure 6-54

1) General

·Enable or Disable Business Hours

Click it to enable it or not on web directly

·Enable Office Closed Timing

By dialing *81 (*81 is default) on an extension will force the office time closed for the device whatever the general setting is.

·Enable Office Timing

By dialing *82 (*82 is default) on an extension will force the office time enalbed for the device whatever the general setting is.

·Disable Office (closed) timing

By dialing *081 (*081 is default) on an extension will disable the Office Timing or Office Closed Timing.

2) Add office hours

You can setup the business hours here.

3) Add Holiday

You can setup the holidays here.

If a time period is configured as both Holidays and office hours, it will be treated as Holidays.

6.6.3 Feature Codes

There are many feature codes available in MyPBX, which allow users to dial from extension side to realize the exact feature

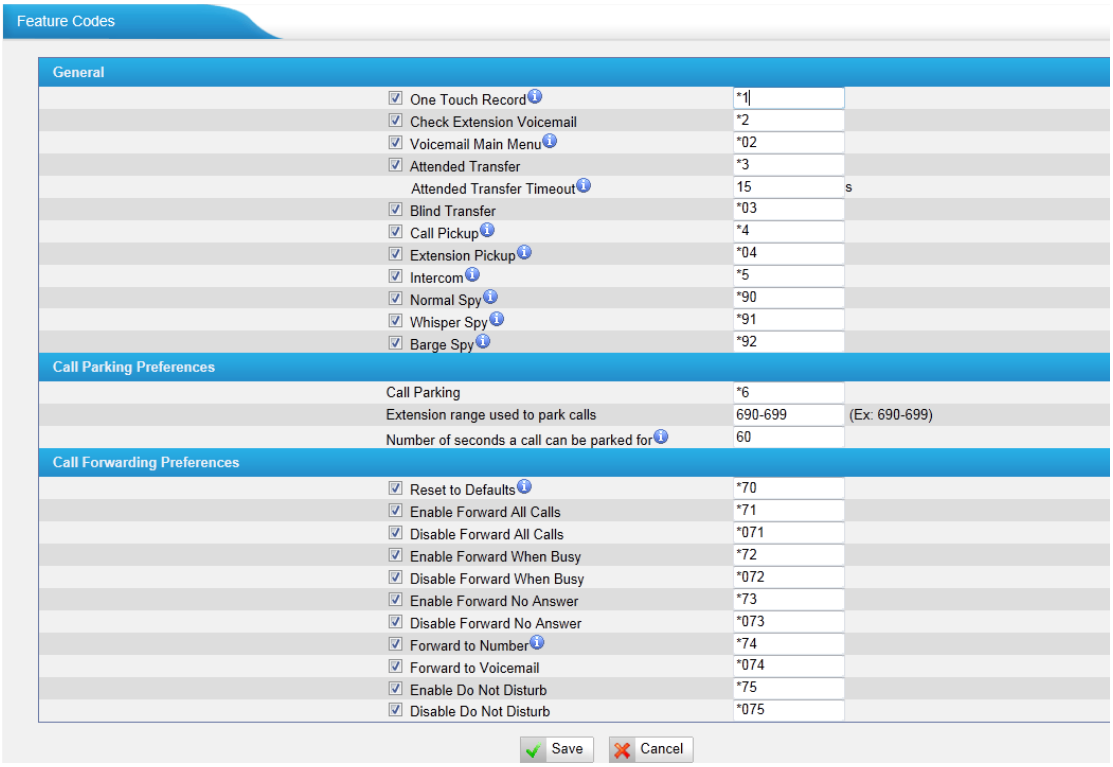

Figure 6-55

1) General

·One Touch Record

A user may initiate or stop call recording by dialing *1 during a call. (*1 is default setting)

·Extension for Checking Voicemail

Users can check their Voicemail by dialing *2 on their phone (*2 is default setting).

·Voicemail for Extension

Users can leave a voicemail to other extensions by dialing # on their phone or the incoming call could be forwarded to an extension's voicemail directly. (# is default setting).

For example, extension 500 want to leave a message for extension 501, users can use 500 dial'#501' to enter the voicemail of 501.

·Voicemail main menu

Users can go to the main menu by dialing *02 (*02 is default setting).

·Attended Transfer

Users may transfer an incoming call by dialing *3 on their phone (*3 is default setting).

·Attended Transfer Timeout
The time out of transferring a call

·Blind Transfer
Users may blind transfer an incoming call by dialing *03 on their phone (*03 is default setting).

·Call Pickup
Users may pick up an incoming call by dialing *4 on their phone (*4 is default setting)

·Extension Pickup
Users may pick up a specific extension's incoming call by dialing *04+extension number on their phone (*04 is default setting)

·Intercom
Define the feature code that is used to dial an extension in intercom mode. For instance setting this value to *5 would allow you to initiate an intercom call with extension 501 by dialing *5501.

·Normal Spy
In this mode, you can only listen to the extension being spied, for example you can dial *90501 to monitor extension 501

·Whisper Spy
In this mode you can listen/whisper to the extension being spied, for example, dialing *91501 to listen to extension 501, you can also talk with 501 too.

·Barge Spy
In this mode, you can barge in both extensions involved the call, for example dialing *92501 to barge in and talk with all the extensions inside

2) Call Park Preferences
·Call Parking
User may park an incoming call on his own telephone by pressing '*6' (*6 is default setting)

·Extension range used to park calls
User may park an incoming call on a designated extension at first and then pick up the call again on any other extension.

·Number of seconds a call can be parked before it is recalled.

Defines the number of seconds that a call can be parked before it is recalled to the station that parked it .

3) Call Forwarding Preferences

·Reset to Defaults

Users may reset all call forward defaults by calling *70 on their phone (*70 is default setting).

Note: When reset to defaults. The call forwarding settings will be configured as follows:
Always forward: Disabled
Busy forward to Voicemail: Enabled
No answer forward to Voicemail: Enabled
Do not disturb: Disabled

·Enable Forward All Calls

Users may enable always forward by calling *71 on their phone (*71 is default setting)

·Disable Forward All Calls

Users may disable always forward by calling *071 on their phone (*071 is default setting)

·Enable Forward When Busy

Users may enable busy forward by dialing *72 on their phone (*72 is default setting)

·Disable Forward When Busy

Users may disable busy forward by calling *072 on their phone (*072 is default setting)

·Enable Forward No Answer

Users may enable no answer forward by calling *73 on their phone (*73 is default setting)

·Disable Forward No Answer

Users may disable no answer forward by calling *073 on their phone (*072 is default setting)

·Forward to number

Users may activate call forwarding by dialing this feature code, followed by the extension or phone number to forward all calls to.

Note: Users may activate Forward to number by dialing *74 + phone number.

e.g.: by dialing *74501, all calls will be forwarded to extension 501.

·Forward to Voicemail
Users may forward the call to Voicemail by calling *074 on their phone (*074 is default setting)

·Enable Do Not Disturb
Users may enable do not disturb by calling *75 on their phone (*75 is default setting)

·Disable Do Not Disturb
Users may disable do not disturb by calling *075 on their phone (*075 is default setting)

6.6.4 Voicemail Settings

In this page, we can configure some settings for voicemail feature, including general voicemail settings and SMTP settings, which is used for 'voicemail to email'

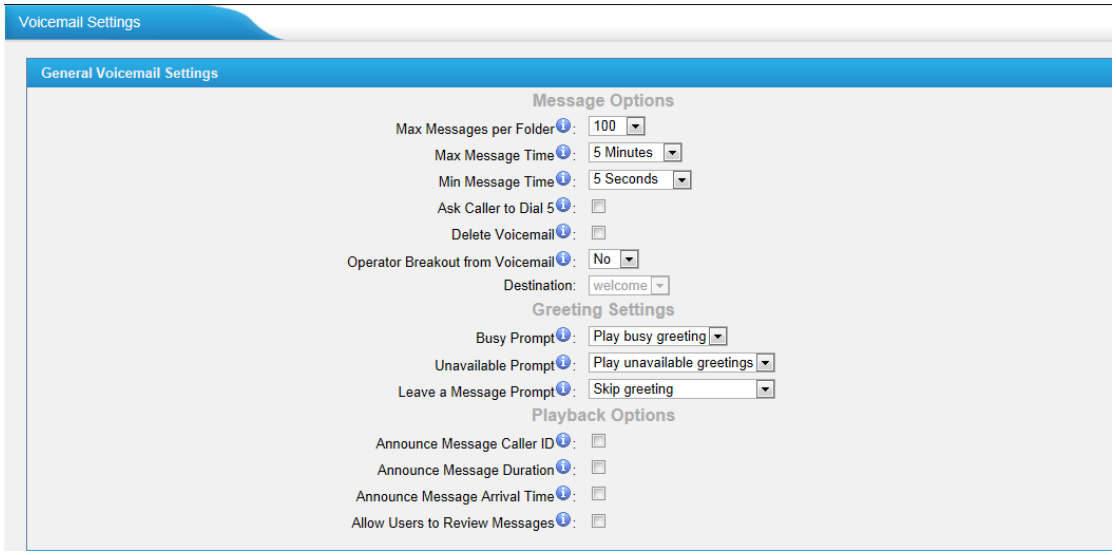

Figure 6-56

1) General Voicemail Settings

a) Message Options
·Max Messages per Folder
Set the maximum number of messages that can be stored in a single voicemail box.

·Max Message Time

Set the maximum length of a single voicemail message.

·Min Message Time
Set the minimum length of a single voicemail message. Messages below this threshold will be automatically deleted.

·Ask Caller to Dial 5
If this option is set, the caller will be prompted to press 5 before leaving a message.

·Operator Breakout from Voicemail
If this option is set, the caller can jump out of the voicemail and go to the destination (IVR) you set by dialing "0".

b) Greeting Settings
·Busy Prompt
Greeting played when the extension called is busy.
Skip greeting: Do not play a greeting.
Play busy greeting: play the extension busy greeting.

·Unavailable Prompt
Greeting played when the extension called is Unavailable.
Skip greeting: Do not play a greeting.
Play Unavailable greeting: play the extension Unavailable greeting.

·Leave a Message Prompt
Greeting played to ask the caller to dial 5 to leave a message.
Skip greeting: Do not play a greeting.
Play busy greeting: play the extension busy greeting.
Play Unavailable greeting: play the extension Unavailable greeting.

c) Playback Options
·Announce Message Caller ID
If this option is enabled, the Caller ID of the party that left the message will be played back before the voicemail message begins playing.

·Announce Message Duration
If this option is set, the duration of the message in minutes will be played back before the voicemail message begins playing.

. Announce Message Arrival Time
If this option is set, the arrival time of the message will be played back before the voicemail message begins playing.

. Allow Users to Review Messages

Allow callers to review their recorded message before sending it to voicemail.

2) SMTP Settings for Voicemail

Note: If you want to send voicemail messages as email attachments, please configure this section.

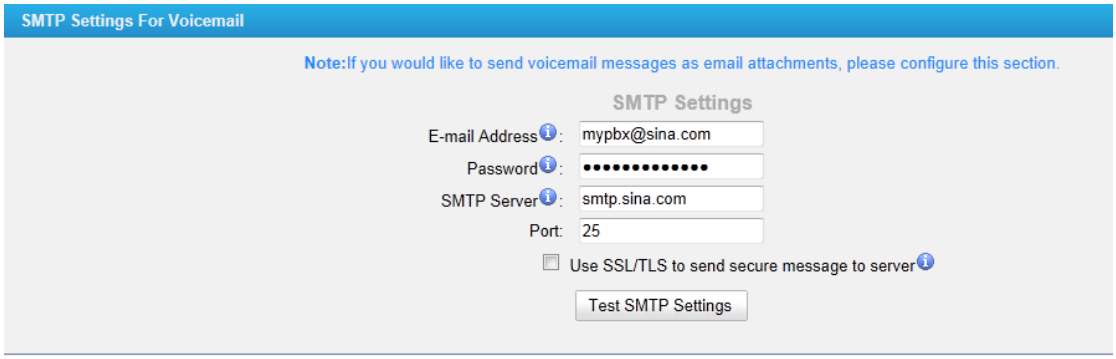

Figure 6-57

·E-mail Address

The E-mail Address that MyPBX will use to send voicemail.

·Password

The password for the email address used above

·SMTP Server

The IP address or hostname of an SMTP server that the MyPBX will connect to in order to send voicemail messages via email, i.e. mail.yourcompany.com.

·Port

SMTP Port: the default value is 25.

·Use SSL/TLS to send secure message to server

If the server of sending email needs to authenticate the sender, you need to select the check box.

Note: Must be selected for Gmail or exchange server.

After filling out the above information, you can click on the 'Test Account Settings' button to check whether the setup is OK.

1) If the test is successful, you can use the email safely.

2) If test failed, please check the above information is correct or network is proper.

6.7 Advanced Settings

6.7.1 SIP Settings

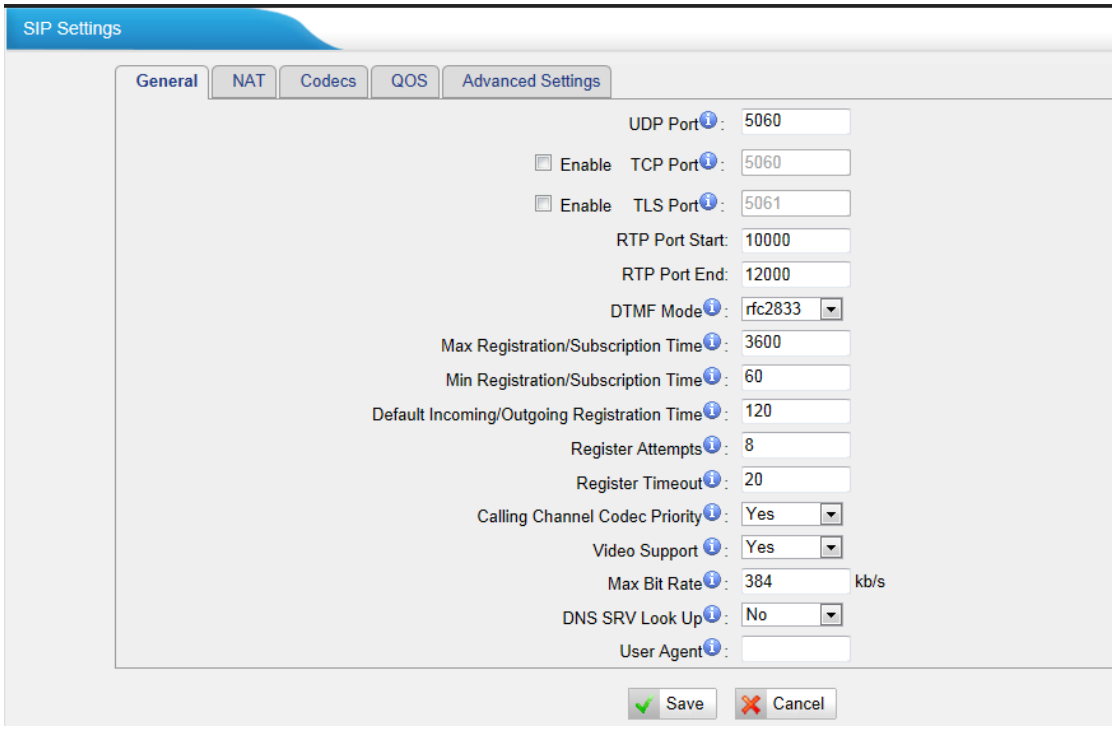

Figure 6-58

1) General

·UDP Port

Port use for sip registrations, Default is 5060.

·TCP Port

Port use for sip registrations, Default is 5060.

·TLS Port

Port use for sip registrations, Default is 5061.

·RTP Port Start

Beginning of RTP port range

·RTP Port End

End of RTP port range

·DTMF Mode

Set default mode for sending DTMF. Default setting: rfc2833

·Max Registration/Subscription Time
Maximum duration (in seconds) of a SIP registration. Default is 3600 seconds.

·Min Registration/Subscription Time
Minimum duration (in seconds) of a SIP registration. Default is 60 seconds.

·Default Incoming/Outgoing Registration Time
Default Incoming/Outgoing Registration Time: Default duration (in seconds) of incoming/outgoing registration.

·Register Attempts
The number of SIP REGISTER messages to send to a SIP Registrar before giving up. Default is 8 times.

·Register Timeout
Number of seconds to wait for a response from a SIP Registrar before timed out . Default is 20 seconds.

·Calling Channel Codec Priority
Once enabled, when dialing out via SIP/SPS trunks, the codec of calling channel will be selected in preference. If not, MyPBX will follow the priority in your SIP/SPS trunks.

·Video Support
Support for SIP video or no. Default is yes.

·Max Bit Rate
Configure the max bit rate for video stream. The default: 384kb/s

·DNS SRV Look Up
Please enable this option when your SIP trunk contains more than one IP address.

·User Agent
To change the user agent parameter of asterisk, the default is 'MyPBX', you should change it if needed.

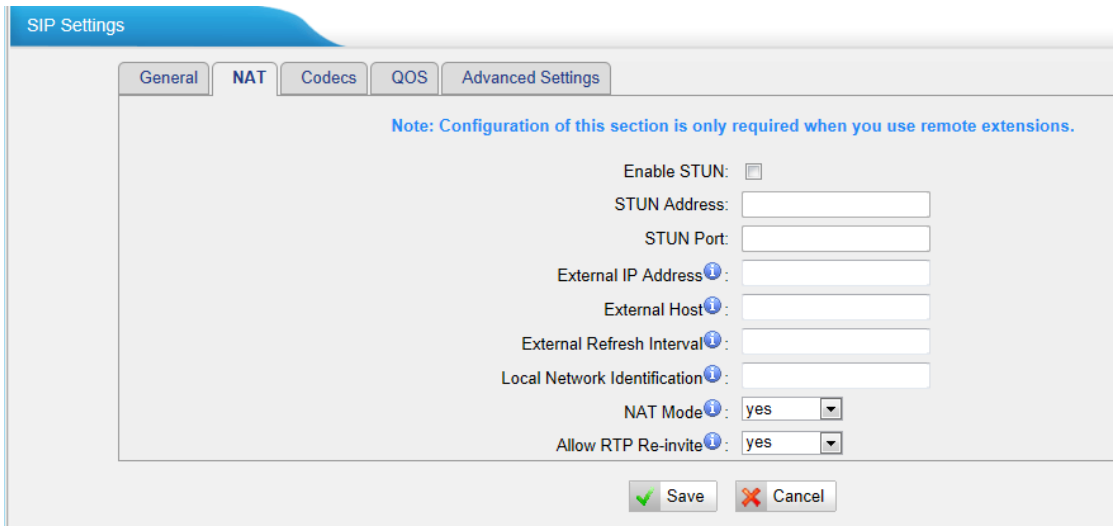

Figure 6-59

2) NAT

Note: Configuration of this section is only required when using remote extensions.

·Enable STUN

STUN (Simple Traversal of UDP through NATs) is a protocol for assisting devices behind a NAT firewall or router with their packet routing.

·STUN Address

The STUN server allows clients to find out their public address, the type of NAT they are behind and the internet side port associated by the NAT with a particular local port. This information is used to set up UDP communication between the client and the VOIP provider and so establish a call.

·External IP Address

The IP address that will be associated with outbound SIP messages if the system is in a NAT environment.

·External Host

Alternatively you can specify an external host, and the system will perform DNS queries periodically.

This setting is only required when your public IP address is not static. It is recommended that a static public IP address be used with this system. Please contact your ISP for more information.

·External Refresh Interval

If an external host has been supplied, you may specify how often the system will perform a DNS query on this host. This value is specified in seconds.

·Local Network Identification

Used to identify the local network using a network number/subnet mask pair when the system is behind a NAT or firewall.

Some examples of this are as follows:

'192.168.0.0/255.255.0.0' : All RFC 1918 addresses are local networks;

'10.0.0.0/255.0.0.0' : Also RFC1918;

'172.16.0.0/12':Another RFC1918 with CIDR notation;

'169.254.0.0/255.255.0.0' : Zero conf local network.

Please refer to RFC1918 for more information.

·NAT Mode

Global NAT configuration for the system; the options for this setting are as follows:

Yes = Use NAT. Ignore address information in the SIP/SDP headers and reply to the sender's IP address/port.

No = Use NAT mode only according to RFC3581.

Never = Never attempt NAT mode or RFC3581 support.

Route = Use NAT but do not include rport in headers.

·Allow RTP Reinvite

By default, the system will route media steams from SIP endpoints through itself. Enabling this option causes the system to attempt to negotiate the endpoints to route packets to each other directly, bypassing the system. It is not always possible for the system to negotiate endpoint-to-endpoint media routing.

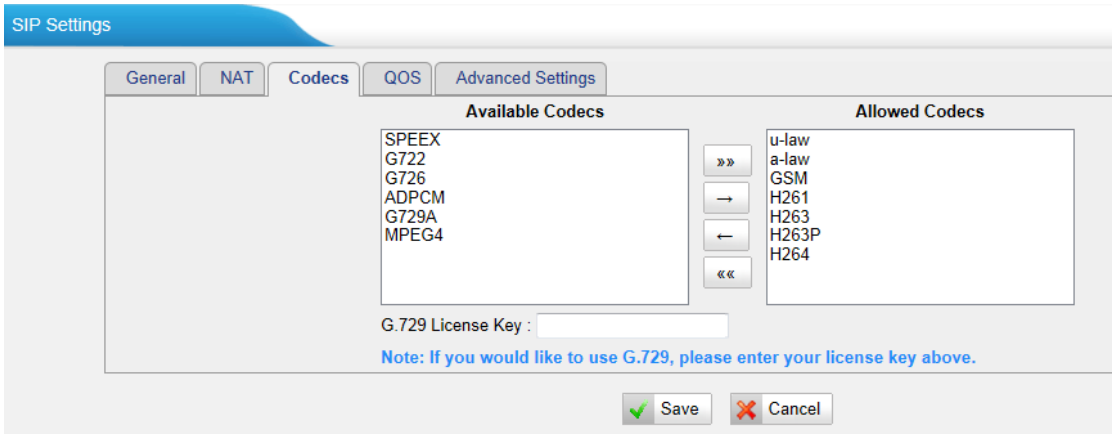

Figure 6-60

3）Codecs

A codec is a compression or decompression algorithm that used in the transmission of voice packets over a network or the Internet.

u-law: A PSTN standard codec, used in North America, that provides very good voice quality and consumes 64kbit/s in each direction (receiving and transmitting) of a VoIP call.

a-law: A PSTN standard codec, used outside of North America, that provides very good voice quality and consumes 64kbit/s in each direction (receiving and transmitting) of a VoIP call.

GSM: A wireless standard codec, used worldwide, that provides adequate voice quality and consumes 13.3kbit/s in each direction (receiving and transmitting) of a VoIP call. GSM is supported by many VoIP phones.

SPEEX: Speex is an Open Source/Free Software patent-free audio compression format designed for speech. The Speex Project aims to lower the barrier of entry for voice applications by providing a free alternative to expensive proprietary speech codecs. Moreover, Speex is well-adapted to Internet applications and provides useful features that are not present in most other codecs.

G.722: G.722 is a wideband speech coding algorithms which supports the bit rate of 64, 56 and 48kbps wideband. It's a broadband voice encoding of G series.

G.726: A PSTN codec, used worldwide, that provides good voice quality and consumes 32kbit/s in each direction (receiving and transmitting) of a VoIP call. G.726 is supported by some VoIP phones.

ADPCM, G.729A, H261, H263, H263p, H264,MPEG4.
Note: If you would like to use G.729, please enter your license.

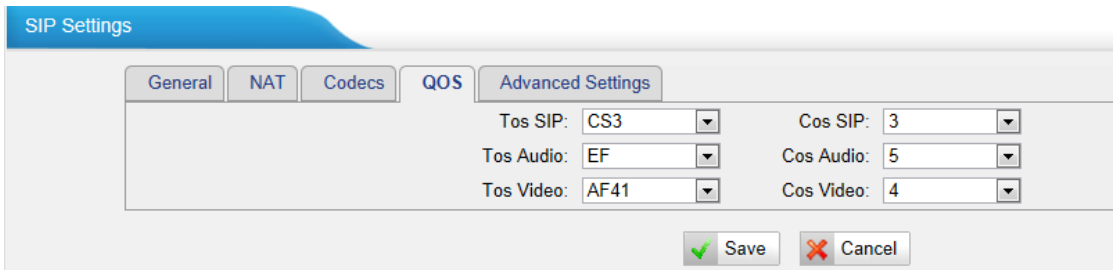

Figure 6-61

4）QOS

QoS (Quality of Service) is a major issue in VOIP implementations. The issue is how to guarantee that packet traffic for a voice or other media connection will not be delayed or dropped due interference from other lower priority traffic.When the network capacity is insufficient, QoS could provide priority to users by setting the value.

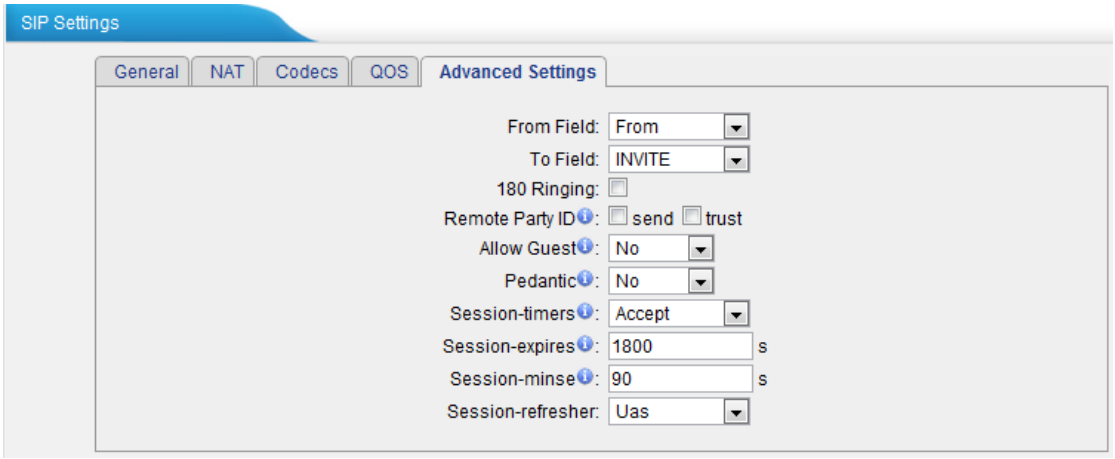

Figure 6-62

5) Advanced Settings

·From Field

Where to get the caller ID in sip packet.

·To Field

Where to get the DID in sip packet.

·180 Ringing

It is set when the telecom provider needs. Usually it is not needed.

·Qualify

Send check alive packets to the sip provider.

·Remote Party ID

Whether send Remote-Party-ID on SIP header. Default no.

·Allow Guest

Whether allow anonymous registration extension. Default: no.

This option is used to avoid some anonymous calls by hackers. More details for the system security configuration, please refer to APPENDIX B MyPBX Security Configuration Guide.

·Pedantic

Enable pedantic parameter. Default: no.

·Session -timers

Enable sesstion-timer mode, default: yes

·Sesstion-expires

The max refresh interval

·Sesstion-minse

The min refresh interval, which mustn't be less than 90s

·Sesstion-refresher
Choose sesstion-refersher, the default is Uas

6.7.2 IAX Settings

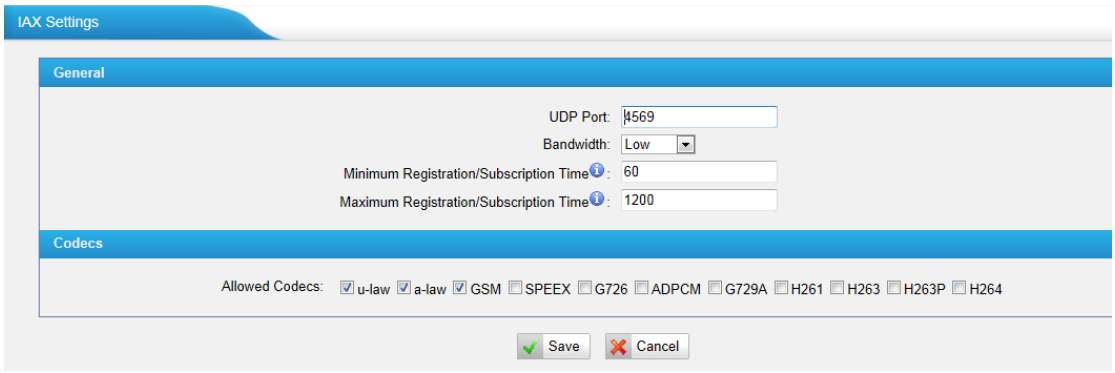

Figure 6-63

1) General

·Bind Port
Port use for IAX2 registrations, Default is 4569.

·Bandwidth
Low/medium/high with this option you can control which codec to be used.

·Min Registration Time
Minimum duration (in seconds) of a IAX2 registration. Default is 60 seconds.

·Max Registration Time
Maximum duration (in seconds) of a IAX2 registration. Default is 1200 seconds.

2）Codecs
A codec is a compression or decompression algorithm that used in the transmission of voice packets over a network or the Internet.
u-law: A PSTN standard codec, used in North America, that provides very good voice quality and consumes 64kbit/s in each direction (receiving and transmitting) of a VoIP call.

a-law: A PSTN standard codec, used outside of North America, that provides very good voice quality and consumes 64kbit/s in each direction (receiving and transmitting) of a VoIP call.

GSM: A wireless standard codec, used worldwide, that provides adequate voice quality and consumes 13.3kbit/s in each direction (receiving and transmitting) of a VoIP call. GSM is supported by many VoIP phones.

SPEEX: Speex is an Open Source/Free Software patent-free audio compression format designed for speech. The Speex Project aims to lower the barrier of entry for voice applications by providing a free alternative to expensive proprietary speech codecs. Moreover, Speex is well-adapted to Internet applications and provides useful features that are not present in most other codecs.

G.726: A PSTN codec, used worldwide, that provides good voice quality and consumes 32kbit/s in each direction (receiving and transmitting) of a VoIP call. G.726 is supported by some VoIP phones.

ADPCM, G.729A, H261, H263, H263p, H264.
Note: If you would like to use G.729, please enter your license.

6.7.3 Blacklist

Blacklist is used to block an incoming/outgoing call. If the number of incoming/outgoing call is registered in the number blacklist, the caller will hear the following prompt: "The number you have dialed is not in service. Please check the number and try again". The system will then disconnect the call.

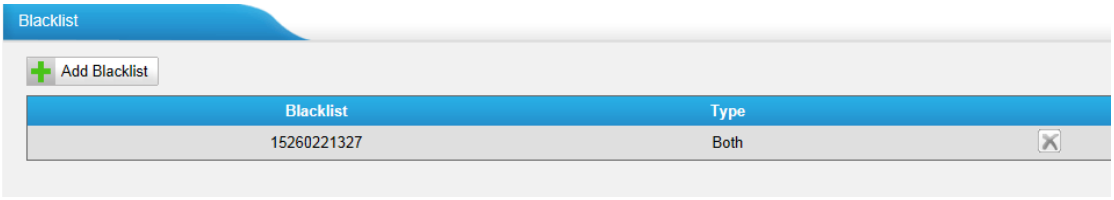

We can add a number with the type: inbound ,outbound or both

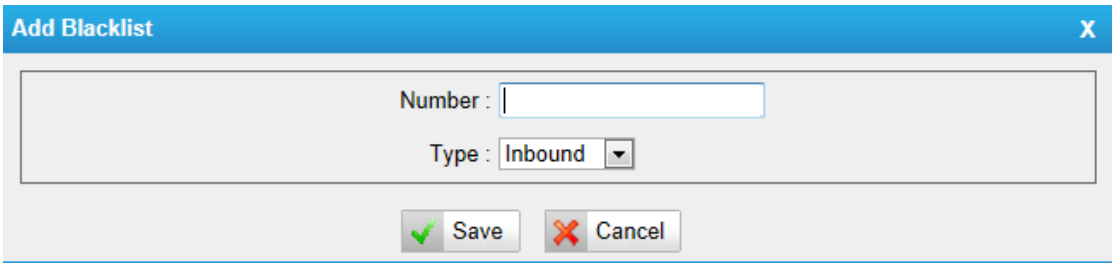

Figure 6-64

Note: It will not working for internal extension number.

6.7.4 Callback Settings

MyPBX allows caller A to dial an inbound route number, and after hearing the ring, A can hang up the call or wait for MyPBX to cut off the call, then MyPBX will call A with this number. When A pick up the call, A can dial the number he wants to call; MyPBX will call the number with its outbound route.

Note:

1. If you'd like to use callback feature, please make sure if it's enabled on the inbound route setting panel.
2. No callback rules needed to be set if the trunk supports call back with the caller ID directly.

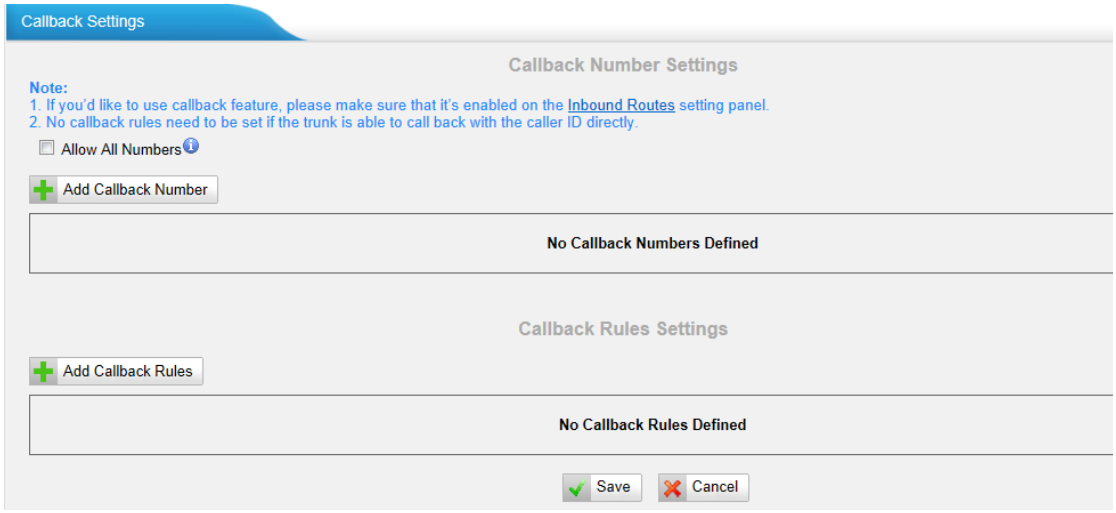

Figure 6-65

·Allow All Numbers

If you want to apply Callback function to all incoming numbers, please tick Allow All numbers.

Follow the step to use this function.

Step 1: Enable Callback.

Inbound Routes – Choose "Yes" on" Enable Callback" to enable this function

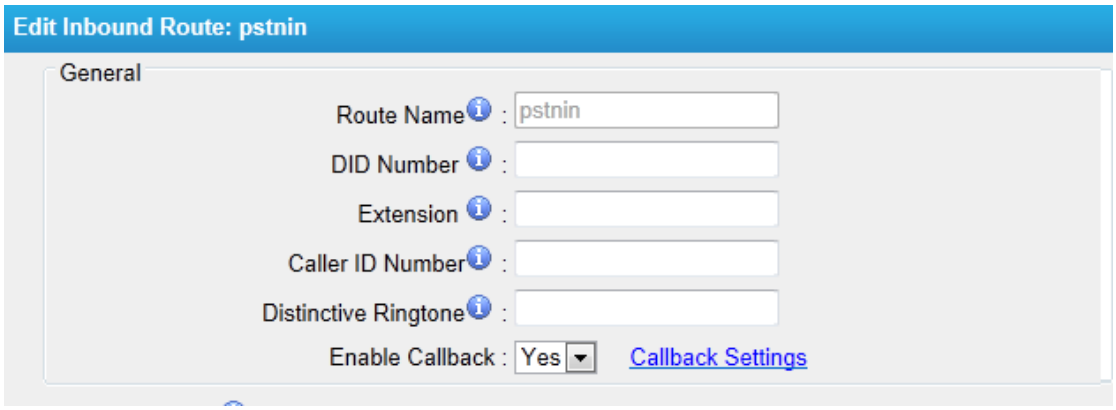

Figure 6-66

Step 2: Create Callback number

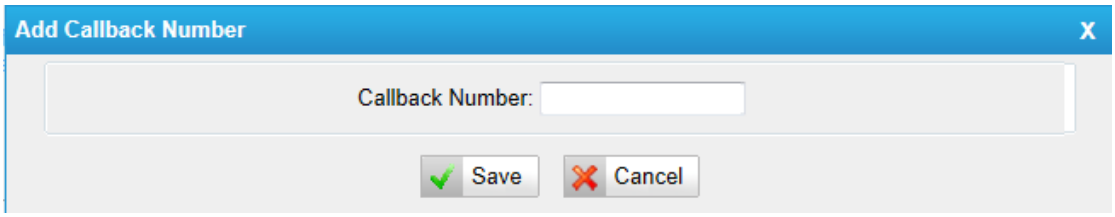

Figure 6-67

Step 3: Create Callback Rules

You will need to create callback rules when the system should strip or add digits.

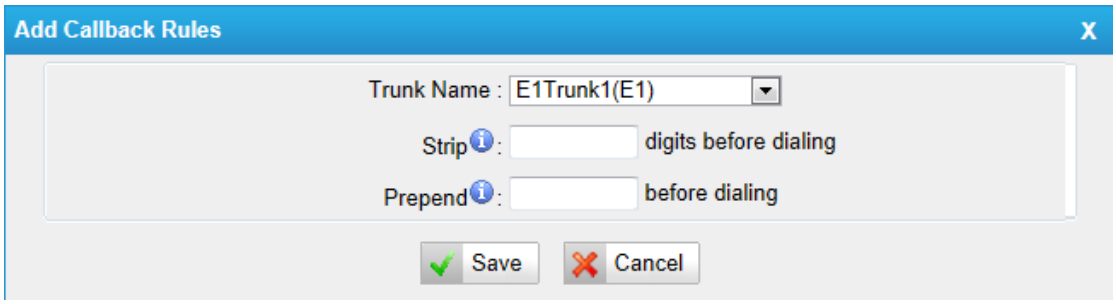

Figure 6-68

·Trunk Name

Choose the trunk with callback rules

·Strip digits from front

Define how many digits will be stripped from the call in number before the callback is placed. For example, when you call from number 123456789 into MyPBX, the caller ID is 0123456789, but you can only call 123456789 successfully from MyPBX trunk. You should configure number 0123456789 as the call back number and strip 1 digit before the callback is placed

·Prepend before dialing

Define digits added before a callback number before the callback is placed. For example, the call in number (Caller ID) is 123456789, MyPBX need to send 9123456789 to its trunk when call to this number. You should configure 123456789 as the call back number and add 9 before the callback is placed. You can add 'w' for analog trunks for some delay too

6.7.5 DNIS Settings

DNIS (Dialed Number Identification Service) is a telephone service that identifies for the receiver of a call the number that the caller dialed

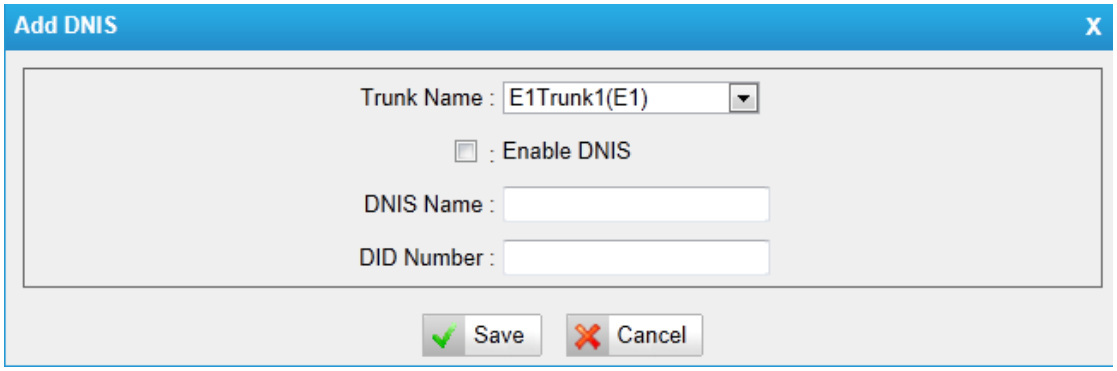

Figure 6-69

Note: If DID is not configured here, all the calls via this trunk will show the DNIS instead of the original caller ID

6.7.6 DISA

DISA (Direct Inward System Access) allows someone calling in from outside the telephone switch (PBX) to obtain an 'internal' system dial tone and make calls as if they were using one of the extensions attached to the telephone switch. To use DISA, a user calls a DISA number, which invokes the DISA application. The DISA application in turn requires the user to enter a PIN number, followed by the pound sign (#). If the PIN number is correct, the user will hear dial tone on which a call may be placed. Obviously, this type of access has serious security implications, and great care must be taken not to compromise your security

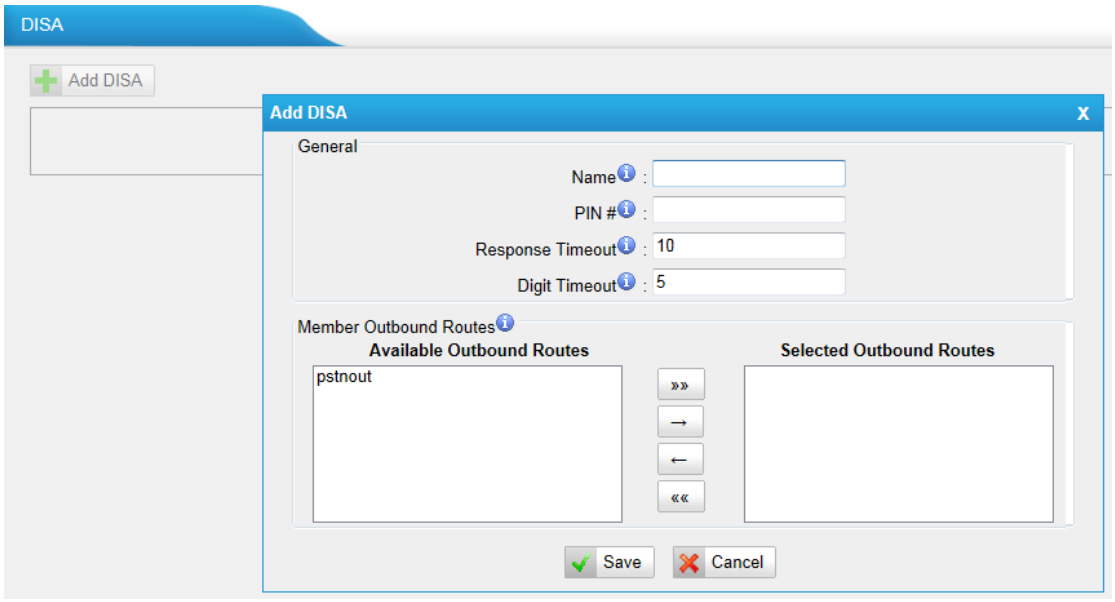

Figure 6-70

1) General

·DISA Name

Give this DISA application a name to help you identify it.

·PIN #

The password for this DISA

·Response Timeout

The maximum amount of time the system will wait before hanging up the call if the user has dialed an incomplete or invalid number. Default is 10 seconds.

·Digit Timeout

The maximum amount of time permitted between each digit when the user is dialing an extension number. Default is 5 seconds.

2) Member Outbound Routes

Used to set the outbound routes that can be accessed from this DISA

6.7.5 PIN User Settings

PIN User is used to manage lists of PINs that can be used to access restricted features such as Outbound Routes.

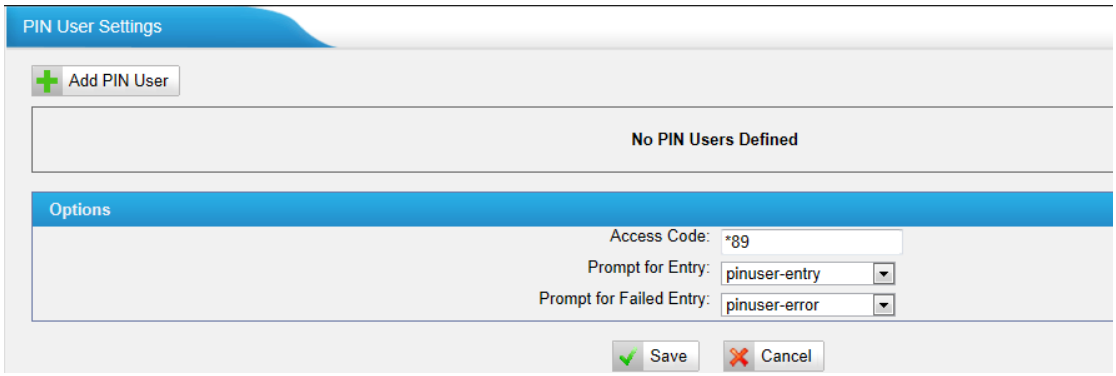

Figure 6-71

1) Options

·Access Code

.Dial this code to access PIN.

·Prompt for Entry

Prompt caller enter the PIN Number.

·Prompt for Entry Failure

Prompt the caller when an invalid PIN is entered.

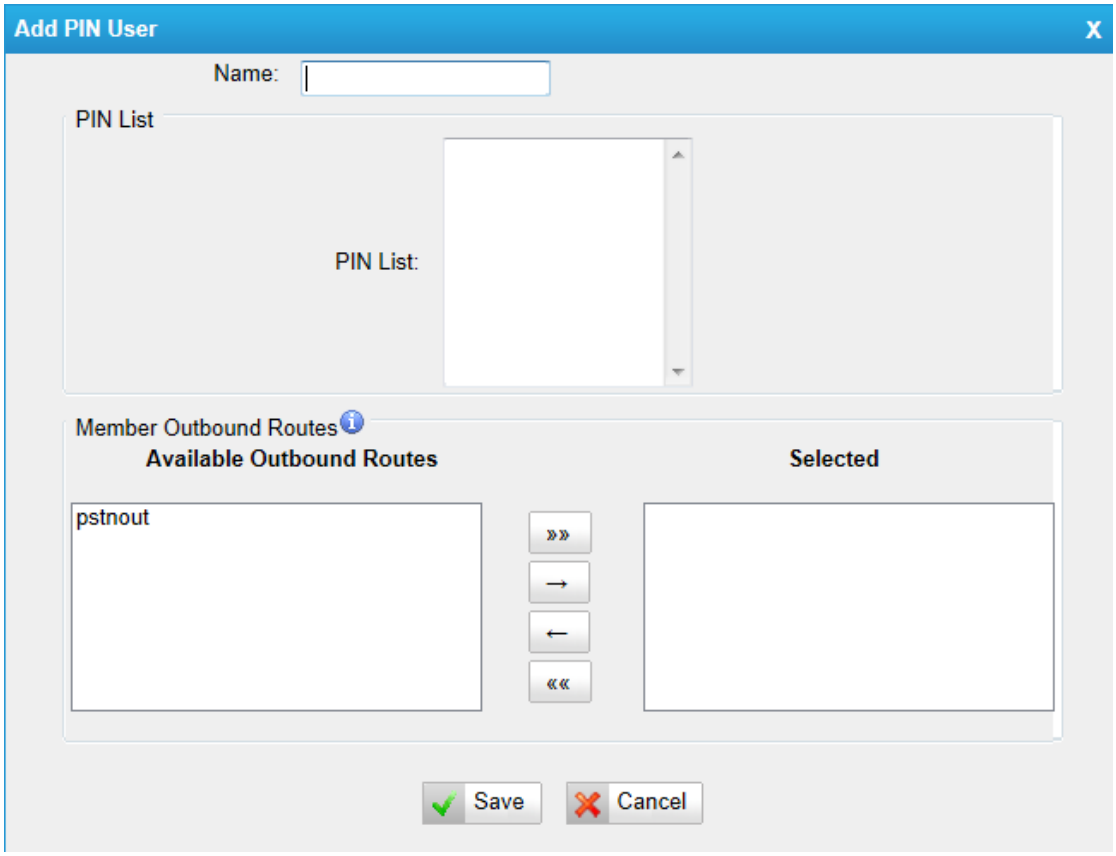

Figure 6-72

2) PIN User

MyPBX can store a number of PIN Users. PIN Users may be used to keep track

of calls in relation to particular activities or clients. They can also be used to keep track of calls by particular users or sets of users.

• PIN entered are checked against those stored by the system. If an invalid PIN is entered, the PIN is requested again.
• The system administrator can configure certain numbers or types of numbers to require entry of a PIN before you can continue making a call to such a number.
• The system administrator can also configure you to have to enter a PIN before making any external call.

·Name
A character-based name for this PIN list, i.e. 'YeastarPIN'
·PIN List
Enter a list of one or more PINs, One PIN per line.
·Outbound Route
PIN User can use those outbound route to make call out

6.7.8 Paging Groups

Paging is used to make an announcement over the speakerphone to a phone or group of phones. Targeted phones will not ring, but instead answer immediately into speakerphone mode. Please note that this section is for configuring paging groups. If you would like to configure Intercom settings, please open the Other Settings -> Feature Codes screen.
This feature is supported by the following SIP phones:
Yealink's T28, T26, T22, T20, T10T, T9CM. Other SIP devices may also work with this feature but are not officially supported.
Note: A paging group can have a maximum of 20 members.

Figure 6-73

In this mode, if you dial its number, MyPBX will help to pick up those chosen members and you can talk directly without any rings.

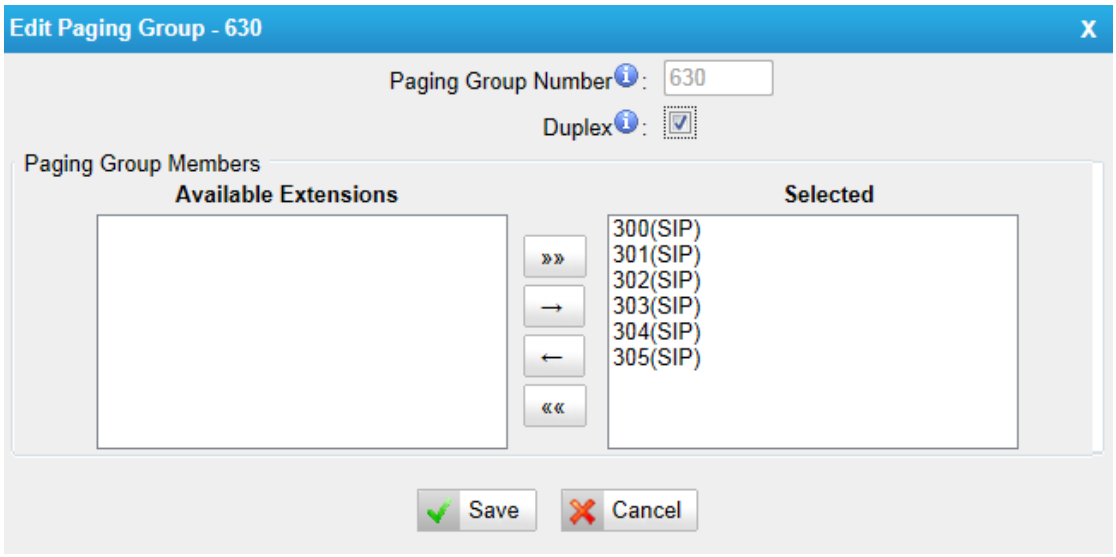

Figure 6-74

·Paging Group Number

Defines the numbered extension that may be dialed to reach this group.

·Duplex

Paging is typically one way for announcements only. Checking this will make paging duplex, allowing all users in the group to talk and be heard by all.

6.7.9 SMS Settings

It's allowed for SMS feature when GSM/UMTS modules are installed.

1) Enable SMS to Email

Figure 6-75

If you enable this, as soon as the GSM trunks receive small messages, MyPBX will send the text of this message to the email addresses listed on the Email List. You can add email addresses to the Email List

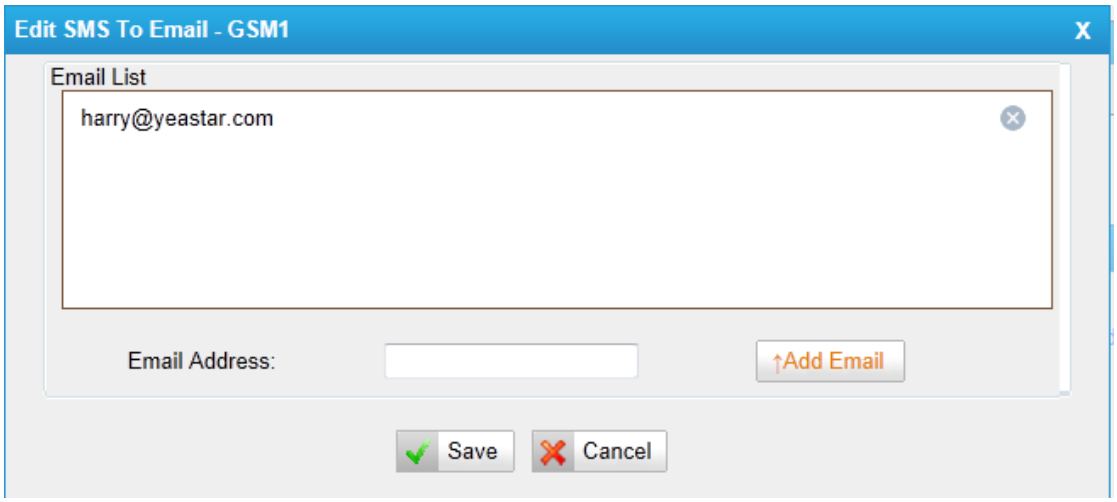

Figure 6-76

2) Enable Email to SMS

If you enable this, you can use MyPBX to send out message by sending an email to the specified address.

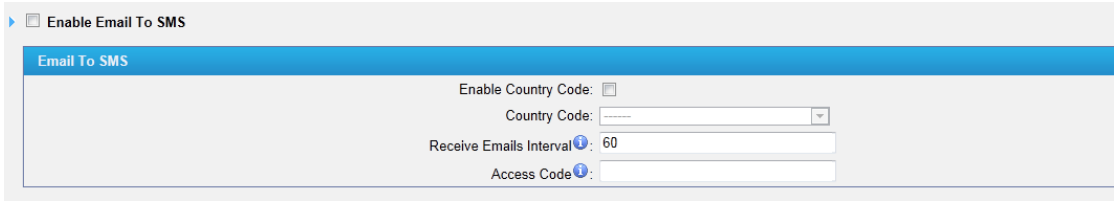

Figure 6-77

·Enable Country Code

If you want to add country code before the dialed numbers, please tick this.

·Country Code

The country code to be add before the dialed numbers.

·Receive mails every

The interval time of receiving mails from POP3 server

·Access Code

This PIN code is used to verify the subject of the emails received. If the form of email passes the verification, it will be send out by SIM card. If not, this email will be deleted immediately

3) Email Settings

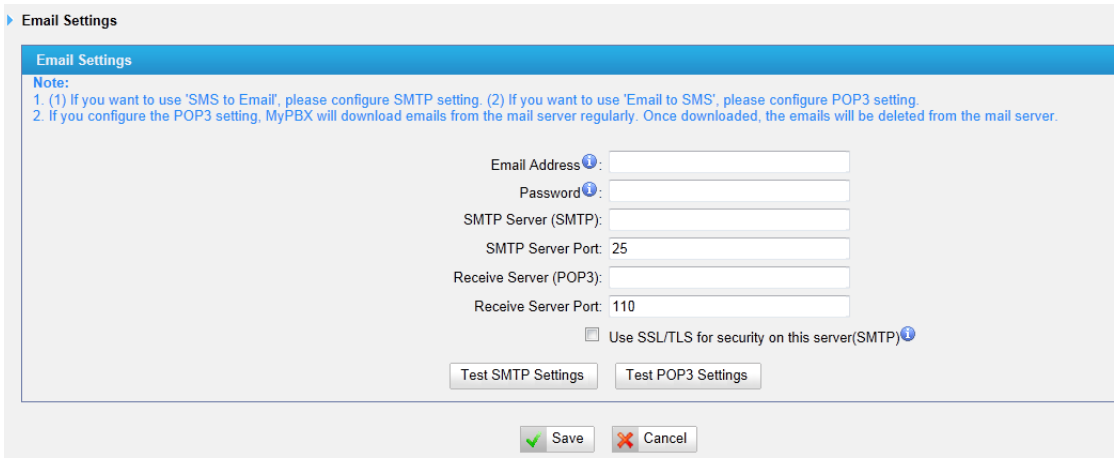

Figure 6-78

Note:

1. If you want to use "SMS to Email", please configure POP3 setting.
2. If you configure the POP3 setting, MyPBX will download emails from the mail server regularly. Once downloaded, the emails will be deleted from the mail server.

·Email Address

This email address will be used to:

1. Send email to the addresses listed on "SMS to Email" setting.
2. Receive email and send the text of the email to the target mobile number by SMS.

Note: If you use gmail, just put your user name here. E.g. email address: test@gmail.com, you just put "test" here.

·Password

Input the password of this email here.

·SMTP Server (SMTP)

·SMTP Server Port

·Receive Server (POP3)

·Receive Server Port

If you want to know more about Email to SMS, please refer to **APPENDIX F**

`

7 Reports

Click

to access

We can check the call detailed logs for counting and system log for debugging

7.1 Call Logs

The call Log captures all call details, including call time, caller number, callee number, call type, call duration, etc. An administrator can search and filter call data by filter the call logs by call date, caller/callee, trunk, duration, billing duration, status, communication type and Pin User.

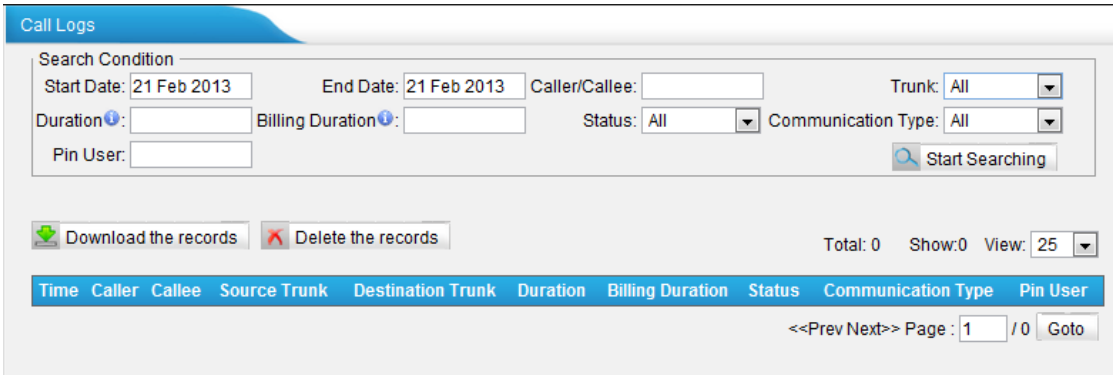

Figure 7-1

7.2 System Logs

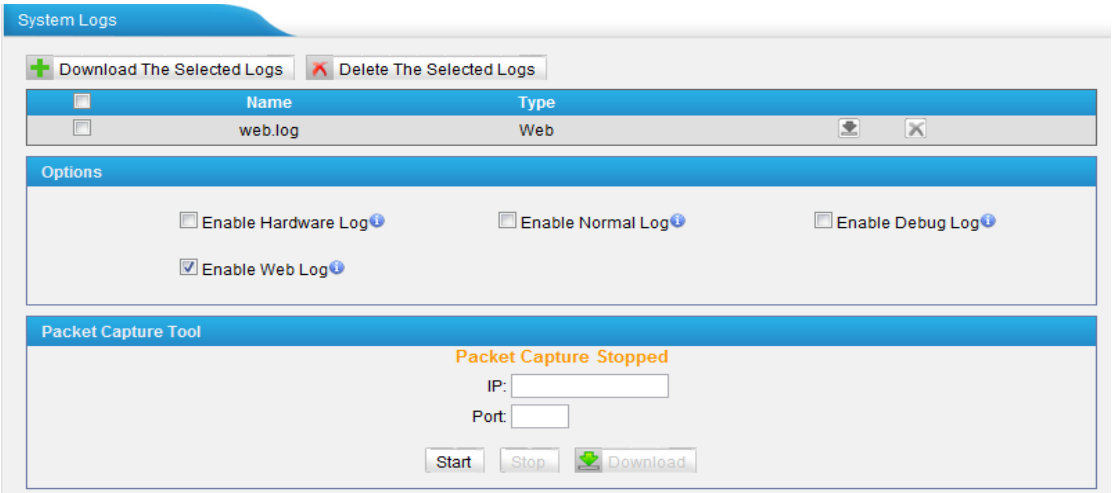

Figure 7-2

You can download and delete the system logs of MyPBX.

1) Options

·Enable Hardware Log

Save the infomation of hardware; (up to 4 log files)

·Enable Normal Log

Save the prompt information; (up to 16 log files)

·Enable Web Log

Save the history of web operations (up to 2 log files)

·Enable Debug Log

Save debug information (up to 2 log files)

We can also enable the SIP/RTP/E1 debug, it's very useful for checking problems.

2） Packet Capture Tool

This feature always used to capture packets for technician. Integrate packet capture tool 'Wireshark' in MyPBX.

Users also could specify the destination IP address and port to get the packets.

·IP

Specify the destination IP address to get the packets.

·Port

Specify the destination Port to get the packets.

8 Logout

Click

to log out safely to the log in page.

9. Use MyPBX

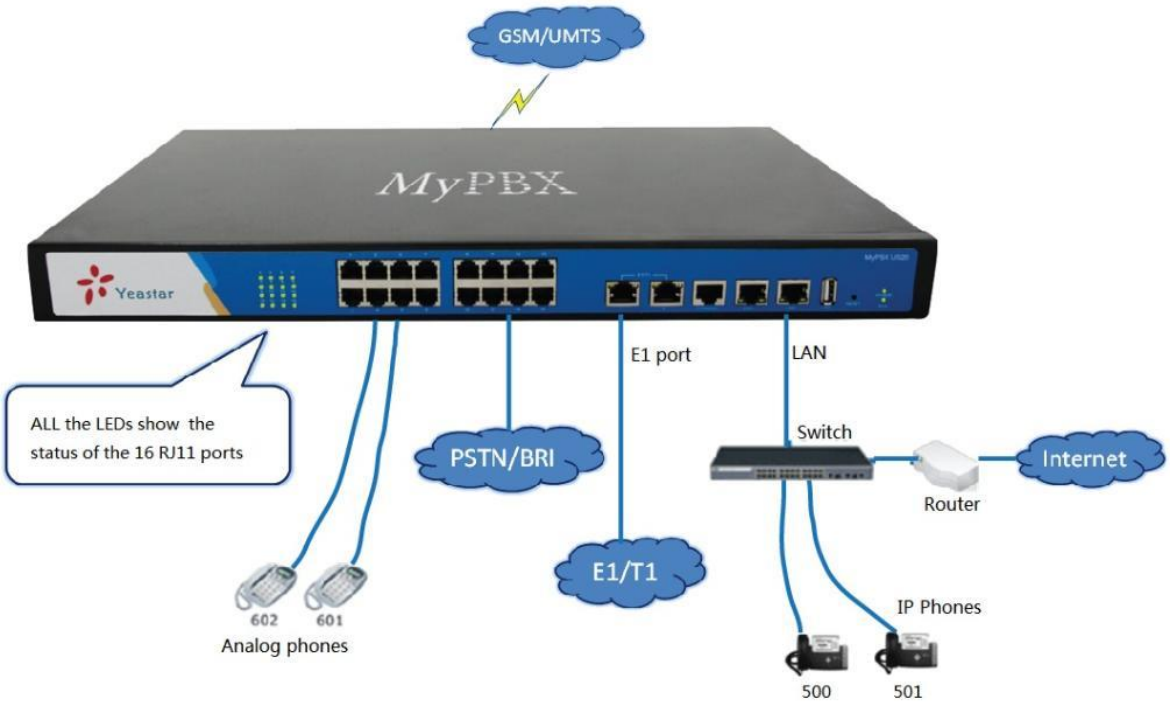

Figure 9-1

9.1 Make outbound call

To make an outbound call, we need to add trunk first. There are 3 types of VoIP Trunk:

·**DigitalTrunk:** E1/T/J1 ports of MyPBX, connected to the ISDN provider
you need to get the detailed signaling type from the provider before configure the E1 trunk.

·**VoIP Trunk:** Connected to remote VOIP service server.
you should get an IP address with user name/ password from the provider.

·**Service Provider:** Connected to service provider server.
you will get only IP address for authorization.

·**Analog Trunk:** FXO ports of MyPBX, connected to a local PSTN.

·**GSM/UMTS Trunk:** GSM ports of MyPBX, connected to GSM Network.

·**BRI Trunk:** BRI ports of MyPBX, connected to ISDN provider

What are FXO and FXS?

FXS (Foreign Exchange Station) is an interface which drives an analog telephone or FAX machine. FXS interfaces deliver power, provide ringing, and use FXO signaling. FXS interfaces are what allow you to hook telephones and

other analog devices to your PBX

FXO (Foreign Exchange Office) is an interface that connects to a phone line to supply your PBX with access to a public telephone network. FXO interfaces use FXS signaling. FXO interfaces allow you to connect your PBX to real analog phone lines.

9.1.1 Sample Routing via E1 Trunk

Let's route all inside extensions through an E1 trunk by dialing 9. In Outbound Routes, add a new outbound route as below.

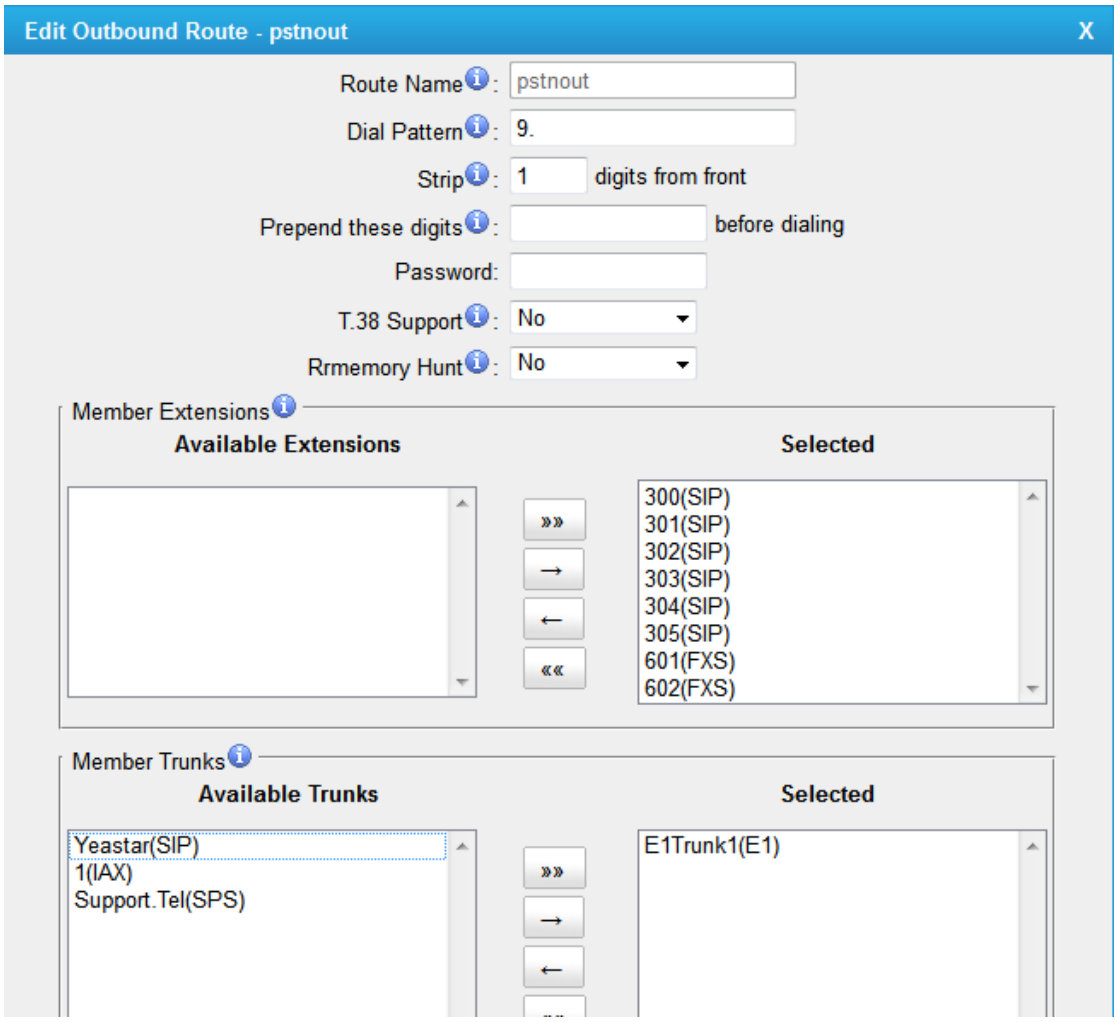

Figure 9-1

As we can see from the outbound route of 'pstnout', all phone numbers starting with 9 will have their first digit stripped off (digit 9) and will be sent to the E1.

After we have configured the above, we can dial 9 + local number to dial out via a E1 trunk.

Note: Setting number prefix to wild card X. and setting Strip to 0 digits from the front will allow all calls to go through this outbound route directly.

9.1.2 Sample Routing via VoIP Trunk

Let's configure all inside extensions to dial '0' through the VoIP Trunk.

1. Add VoIP service provider

Before we do add this, please make sure you have a VoIP Trunk account.
Trunks→ VoIP Trunk → SIP Trunk
Enter your account information on this page, and click Save.

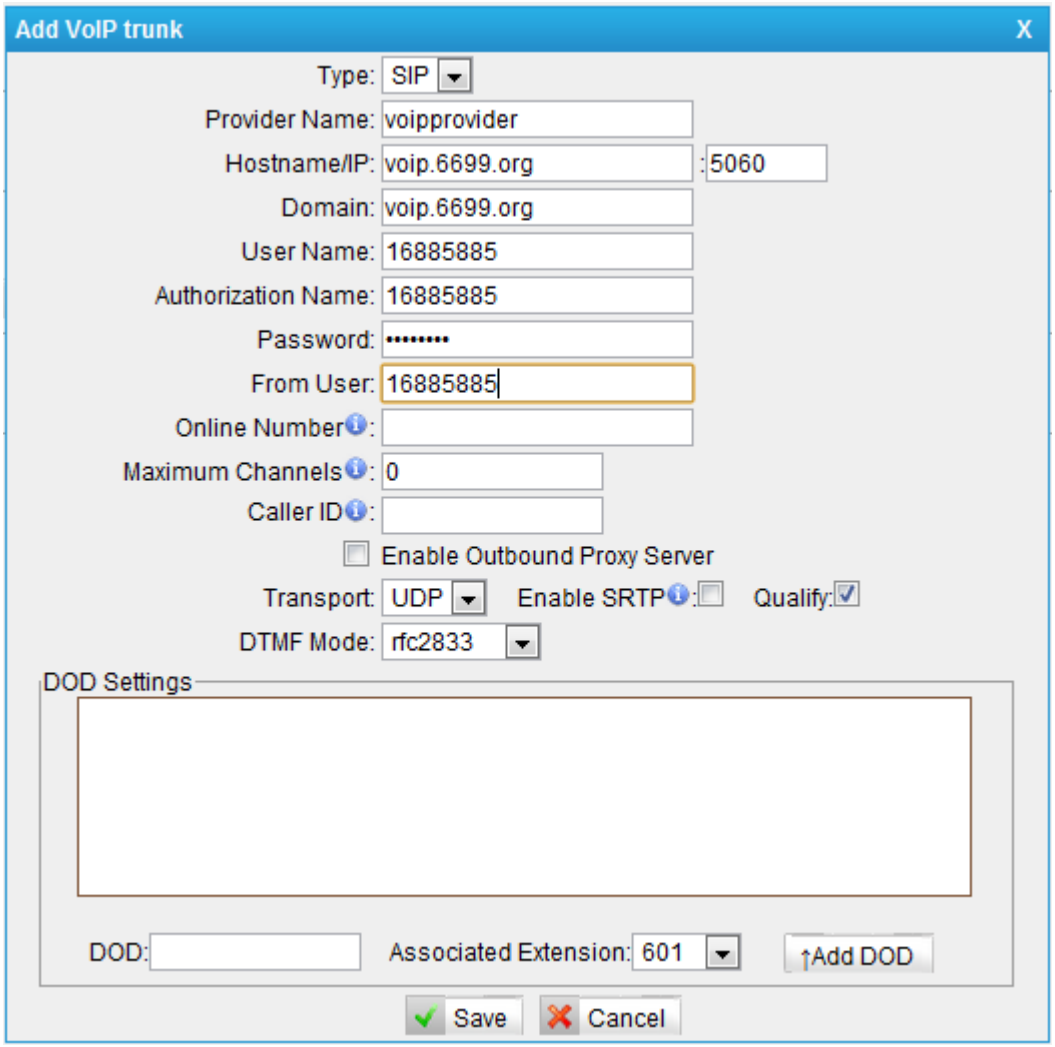

Figure 9-2

2. Add Outbound Routes

As we can see from the Outbound Route of 'voipout', all phone numbers starting with 0 will have their first digit stripped off (digit 0) and will be sent to the SIP Trunk.

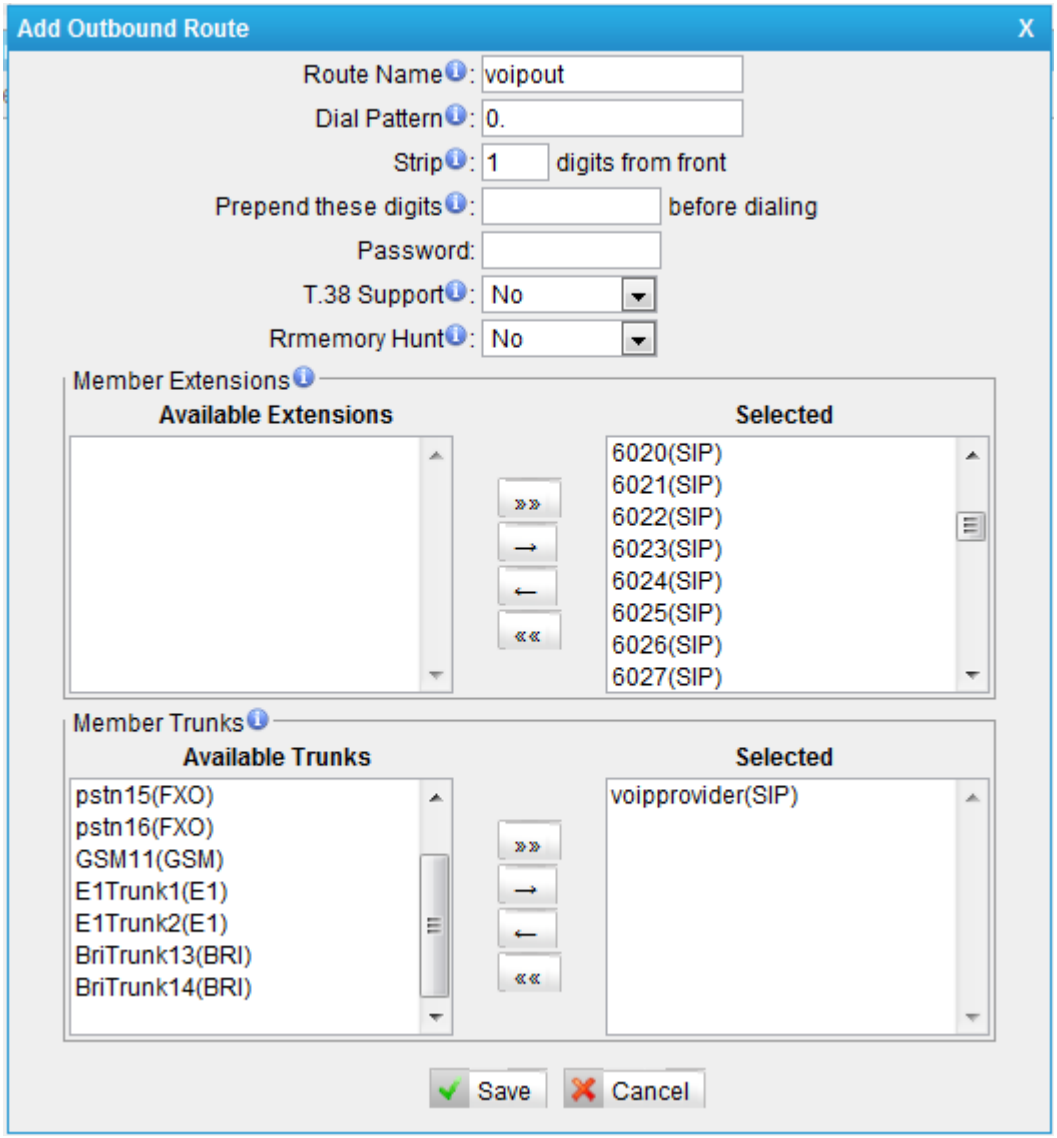

Figure 9-3

Now that we have added two outbound dialing rules, any call starting with 9 will be routed to the PSTN, and any number starting with 0 will be routed to the SIP Trunk.

9.2 Incoming call

9.2.1 Sample Routing to an IVR

Let's configure an incoming call to route to the IVR. In the IVR itself, let's configure digit 0 to route the call to extension 500, and digit 1 to route the call to extension 501.

1. Add IVR

To add a new IVR, go to IVR→ Create New IVR

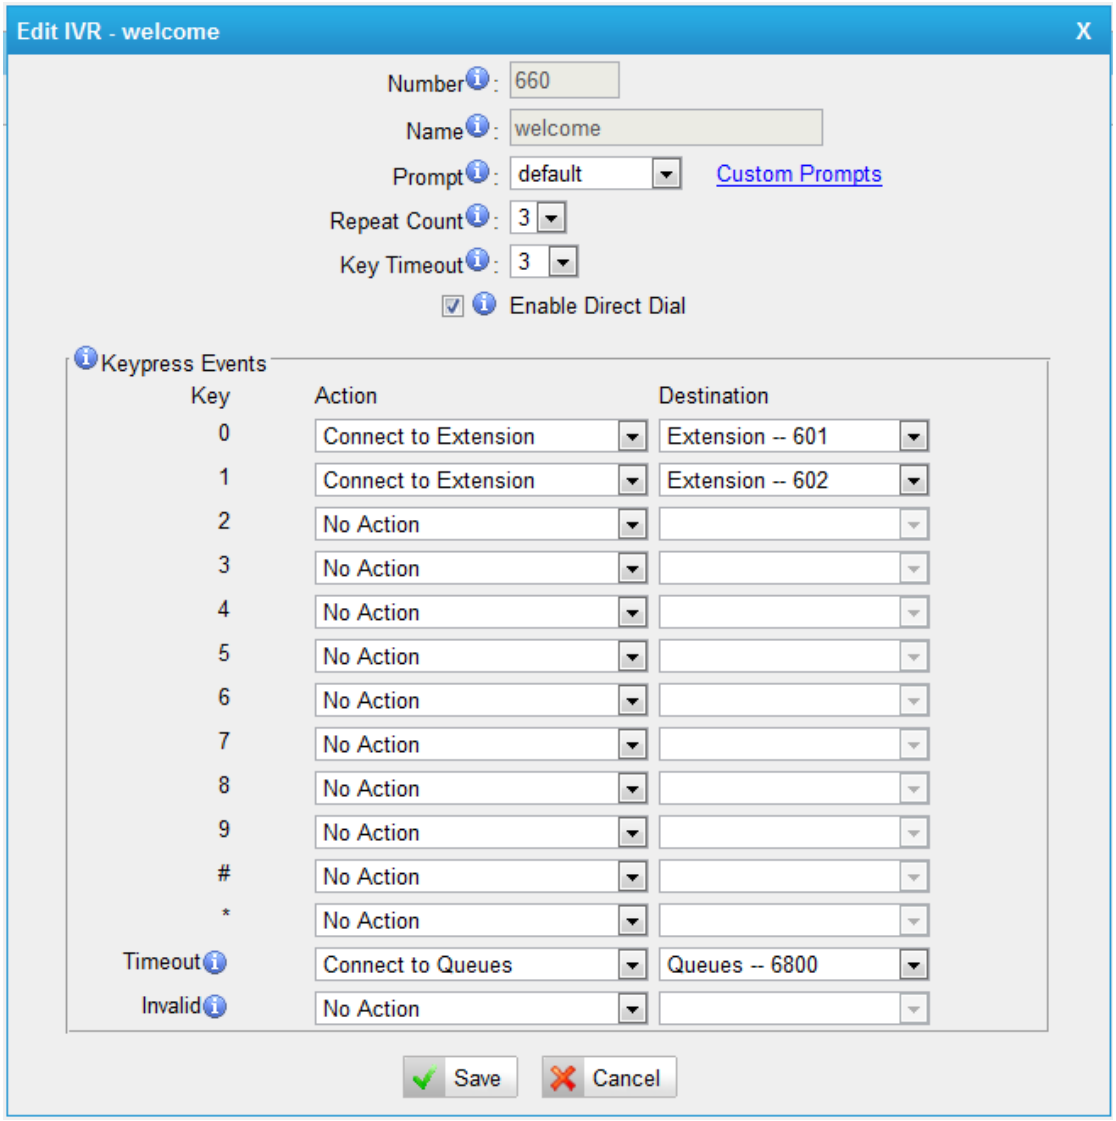

Figure 9-4

2. Add Inbound Routes

As we can see from the Inbound Route of 'allin', all incoming calls will be sent to the IVR.

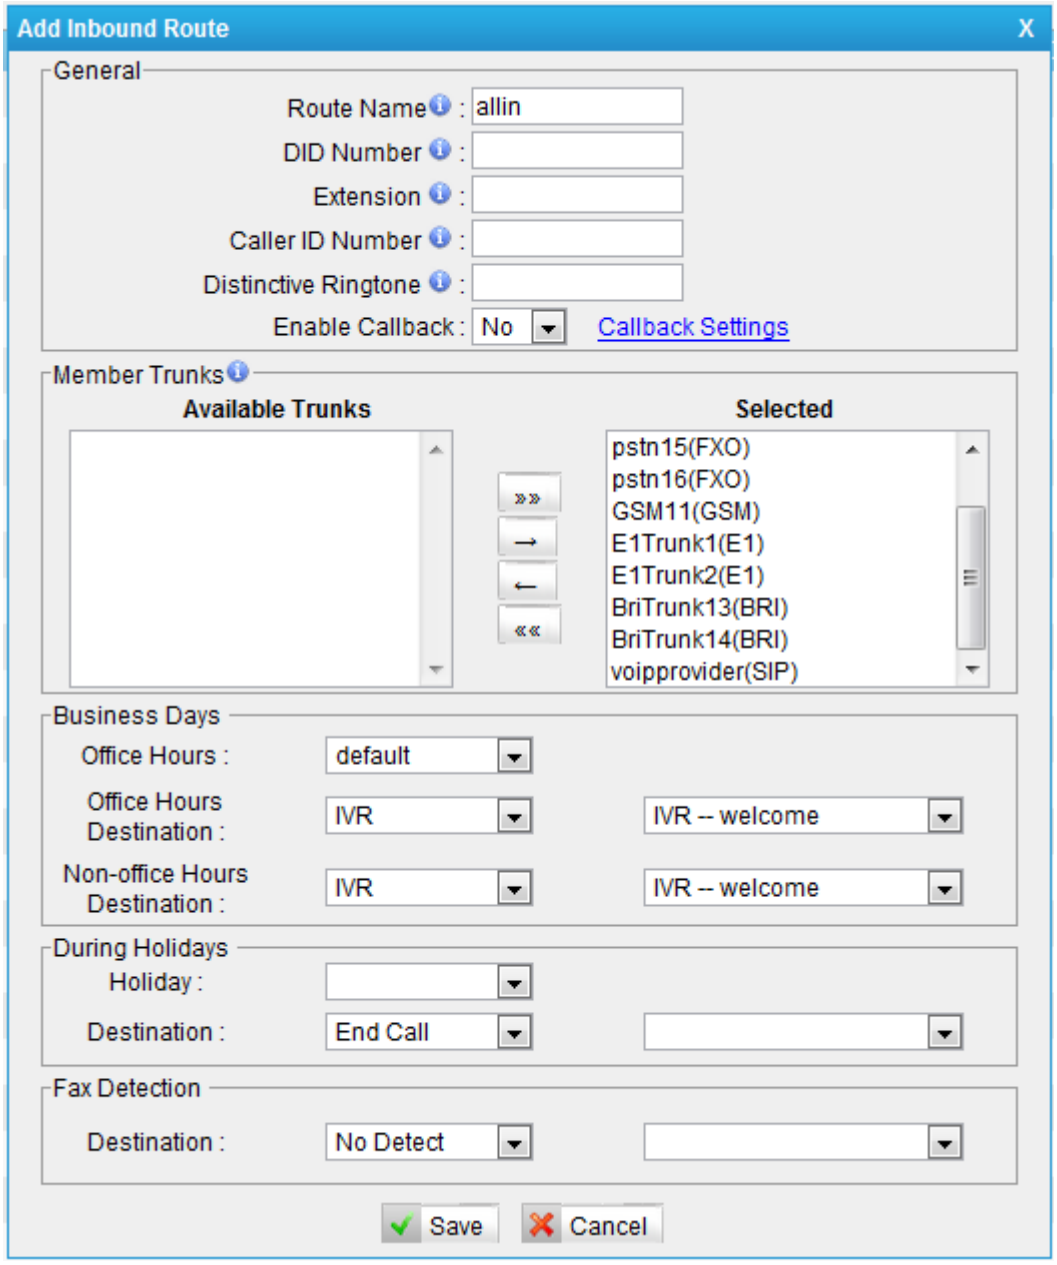

Figure 9-5

APPENDIX A FAQ

Q1. How to Register SIP device?

A1:
1) Register SIP soft phone
Download the x-lite softphone from counterpath website
www.counterpath.com
After install the x-lite, right click the panel and select the SIP Account setting and then configure it.
Display Name: 500
User Name: 500
Password: 500
Authorization Name: 500
Domain: 192.168.5.150

2) Register IP Phone (for example, Yealink's T28 IP Phone)
a) Connect the T28's Internet port to the switch. And it can get the IP from your route.
b) Press the 'OK' key on T28 to get the IP of T28.
c) Put the IP on web browser then you can enter the T28 configure page through this IP.
d) Put the SIP extensions info on the T28 IP phones.
Display Name: 501
User Name: 501
Register Name: 501
Password: 501
SIP Server: 192.168.5.150
Use the same method register another T28 to other extension.

Q2. How do I reset MyPBX back to the factory default settings?

A2: To perform a reset, please follow steps below:
Step 1: Hold down the 'Reset' button on the back of the unit for 5 seconds and watch the LEDs on the front of the MyPBX. When the status LED turns red, let go of the reset button.
Step 2: When the RUN status LED starts blinking, MyPBX will be set back to factory defaults.
Step 3: To access the configuration page, navigate to 192.168.5.150 using a web browser. Make sure that you are on the 192.168.5.0 subnet before doing this.
Step 4: Login to the device with the username 'admin' and the password 'password', in order to begin reconfiguring the device.

APPENDIX B MyPBX Security Configuration Guide

VoIP attacks, although it is not an everyday occurrence, it does exist. While using VoIP, system security is undoubtedly one of the issues we care about most. But with the appropriate configuration, and some basic safety habits, we can improve the security of the telephone system. Moreover, the powerful built-in firewall function in MyPBX is adequate to enable the system to run safely and stably.

This guide will introduce the highest defense level in MyPBX, and we strongly recommend that you configure firewall and other security options according to this guide, to prevent the attack fraud and the system failure or calls loss.

Note: In this guide, the configuration options marked with '*' only exist in X.17.XX.XX and above versions, namely, 3.2 guest calls option, 3.3 remote registered option, and 5 alarm settings.

1. Security Configuration for Web GUI

1.1 Change the default access port for HTTP on Options page

PBX→Basic Settings→ General Preferences→HTTP Bind Port

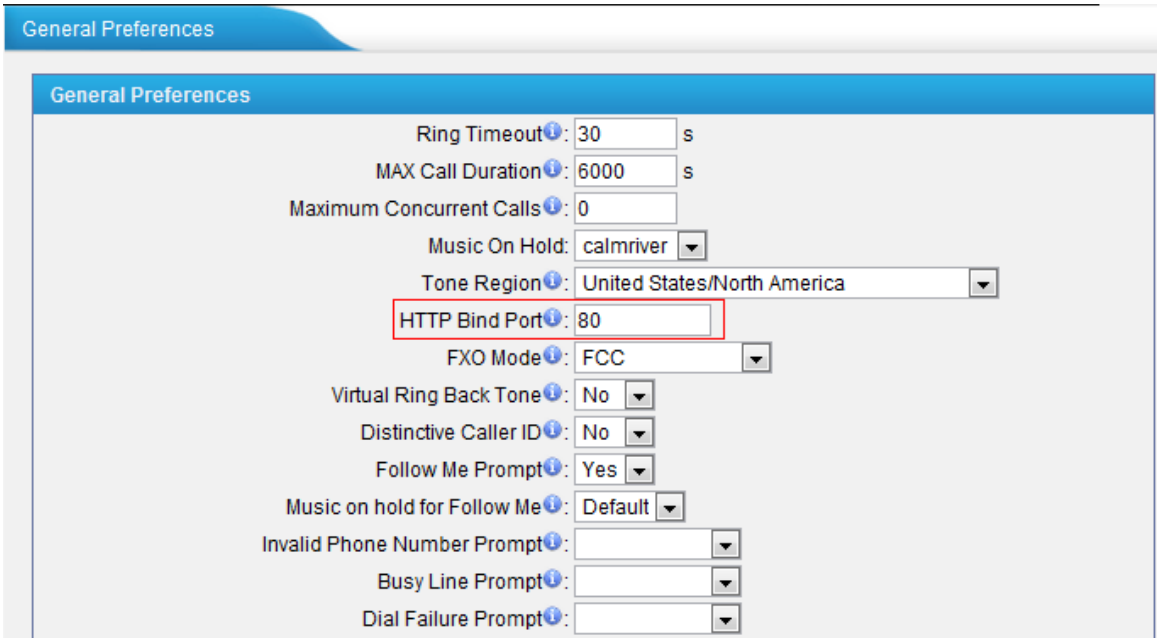

Figure B-1

1.2 Change the default password for the web GUI

System→ System Preferences→Change Password

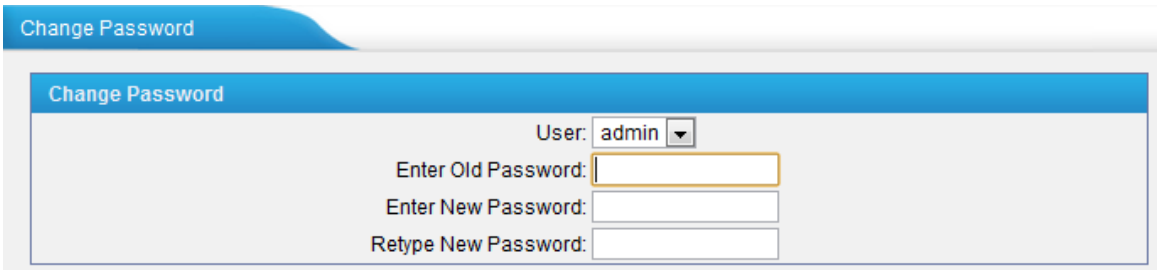

Figure B-2

2. Disable SSH on LAN Settings Page

2.1 Disable SSH

Select LAN Settings→Enable SSH. If external debugging isn't required, please select "No".

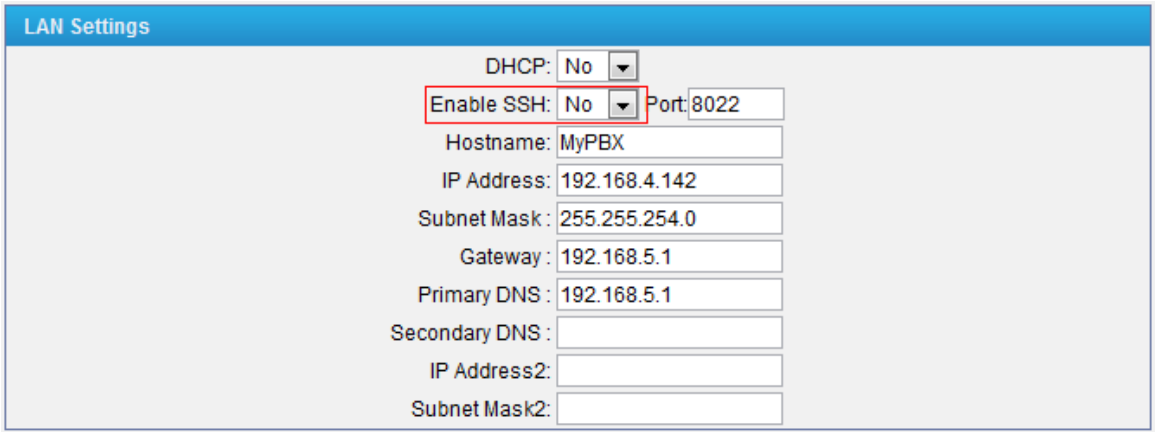

Figure B-3

2.2 Change the default password for SSH

We can use the Linux command passwd to change root password of MyPBX.

1. Login via putty.exe

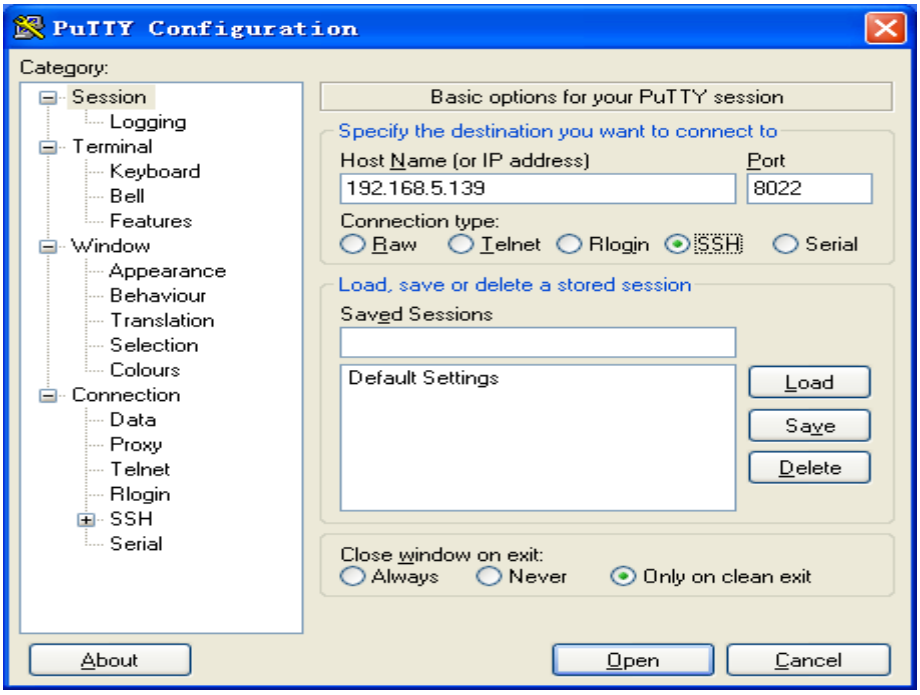

Figure B-4

2. The default username is root and the default password is ys123456.

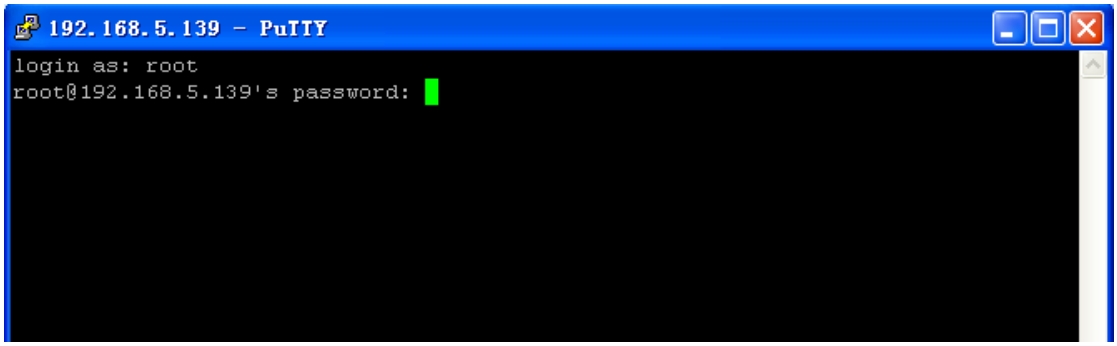

Figure B-5

3. Step 2 use command passwd to change the root's password

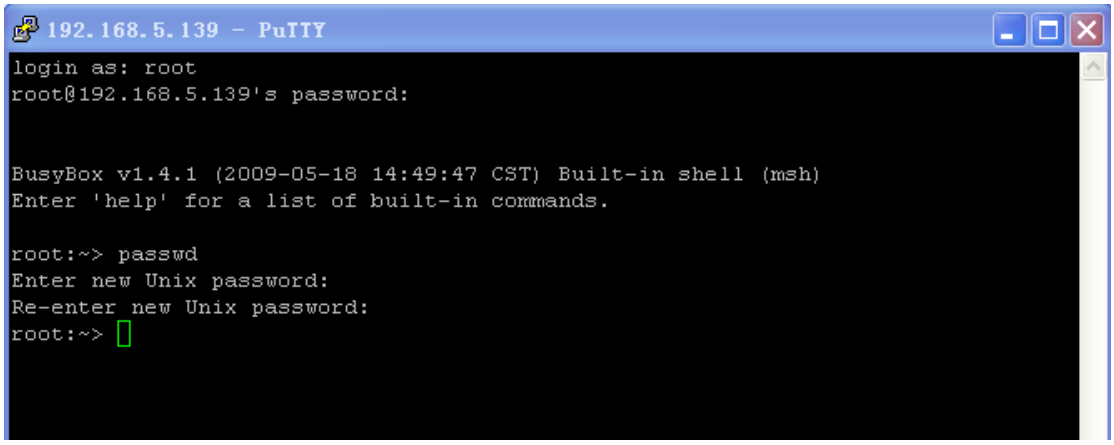

Figure B-6

3. Security Configuration for Extensions

3.1 Change the default SIP Port

PBX→Basic settings→SIP Settings→General→UDP Port

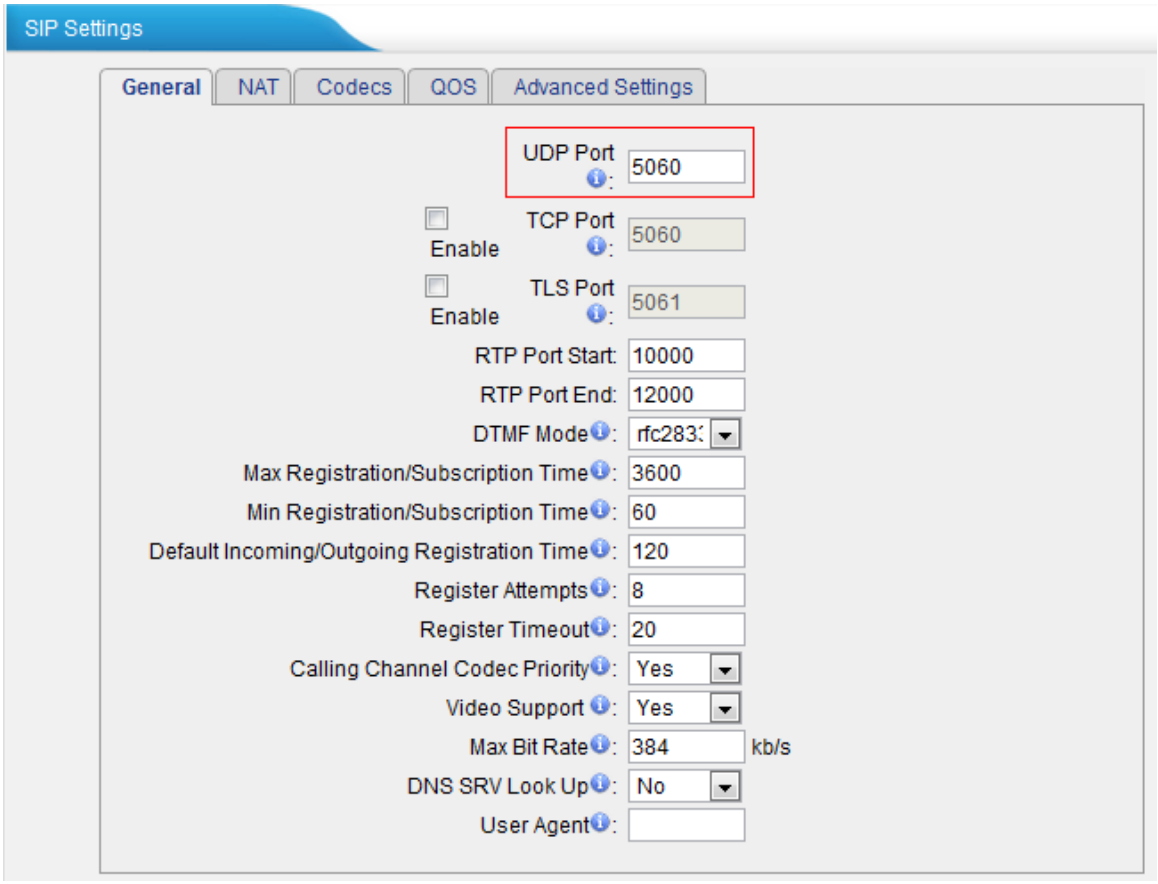

Figure B-7

3.2* Disable guest calls

PBX→Basic settings→SIP Settings→Advanced Settings→Allow Guest

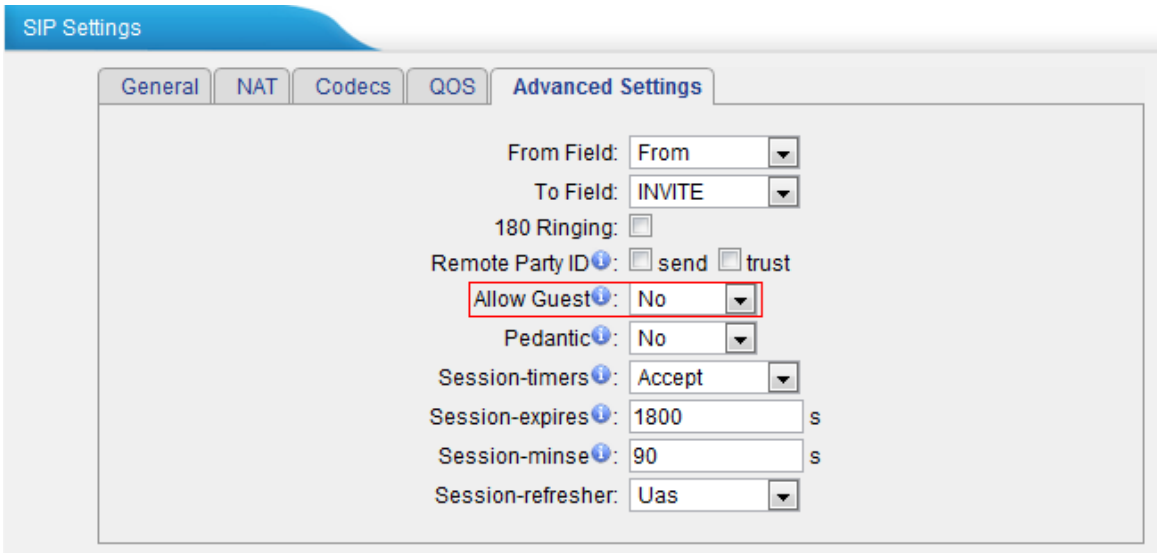

Figure B-8

3.3* Security Configuration for remote extensions

If remote registration isn't required, please disable it.
PBX→Extensions→FXS/VoIP Extensions→ VoIP Extensions→General→VoIP Settings

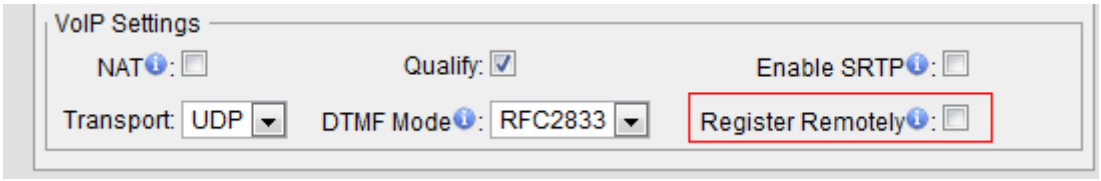

Figure B-9

3.4 Set an enhanced password and enable IP restriction for extensions

1) Set a new extension password at the higher security level, e.g. AjK5Up1G.

PBX→Extensions→FXS/VoIP Extensions→ VoIP Extensions→General→Password

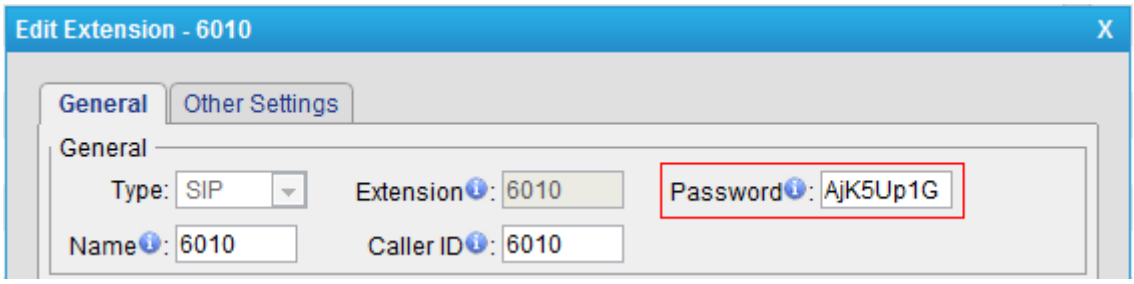

Figure B-10

2) Enable IP restriction and enter the permitted "IP address/Subnet mask", e.g. 192.168.5.136.

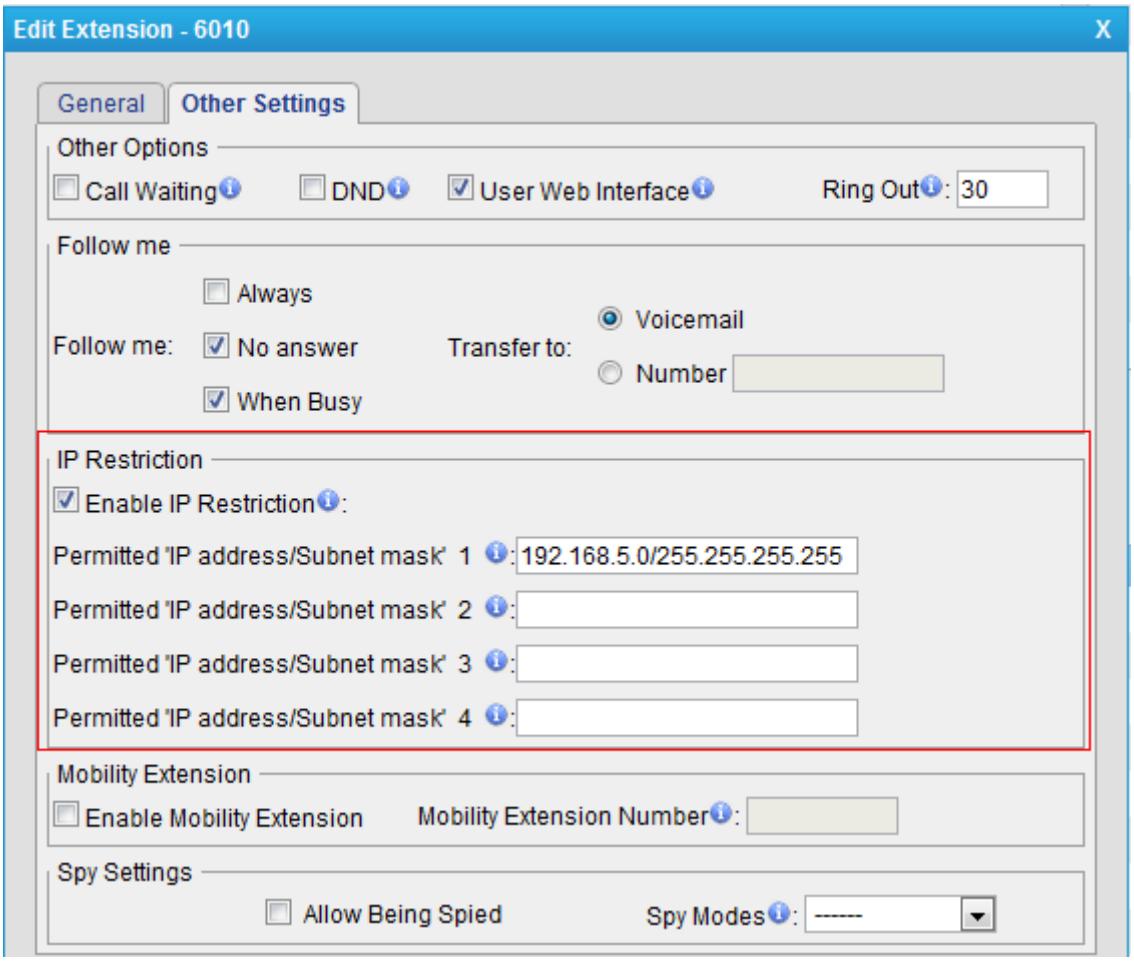

Figure B-11

4. Set up Proper Firewall Rules

Note: Please backup the configurations on backup and restore page before you go ahead. In the case that you lock the device, you can reset to factory default and restore the previous configurations. Below example rules works with MyPBX firmware version 2.15.xx.xx or higher versions.

Step 1. Enable firewall on firewall page of MyPBX.

System→Firewall Settings → Firewall Rules→General Settings

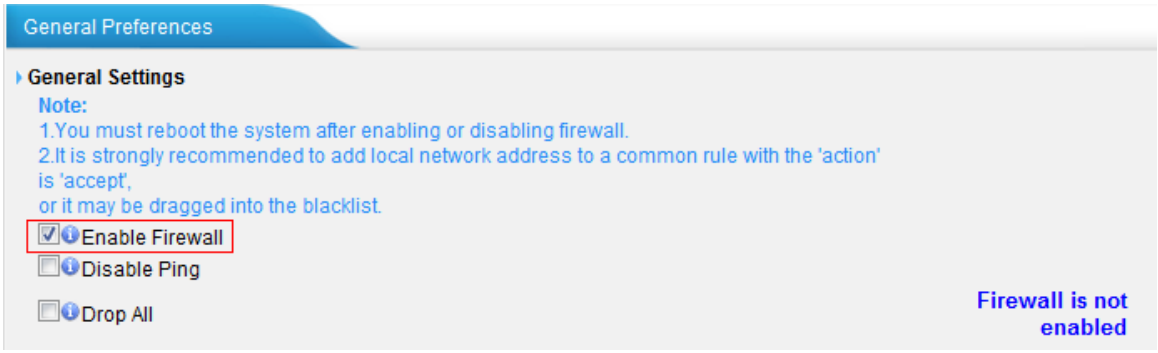

Figure B-12

Step 2. Add a common rule to accept local network access.

Create a common rule to allow the all the IP addresses of the local phones to access MyPBX server. For example, if the IP addresses of the local network are 192.168.5.1-254, the configurations could be as below:

Name: LocalNetwork
Protocol: BOTH
Port: 1:65535
IP: 192.168.5.0/255.255.255.0
Action: Accept

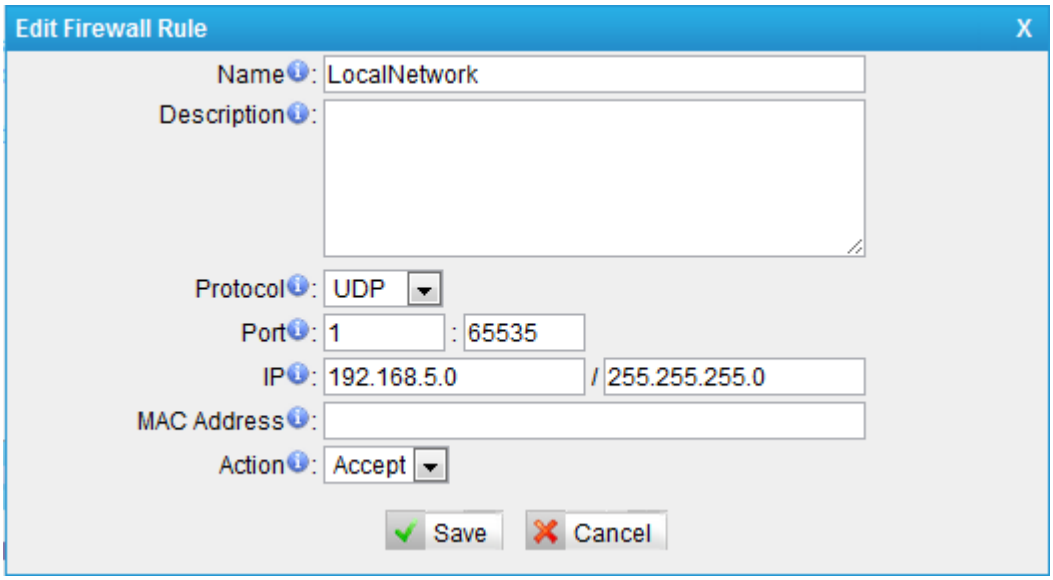

Figure B-13

Step 3. Create common rules to accept remote extensions or remote administrators, if you use SIP trunk, please accept the provider's host as well.

Note: If there are no remote extensions, the rule is not required.

Set up the firewall rule to allow the public IP address of remote extensions to access MyPBX server. e.g.110.111.132.6, the configurations could be as below:
Name: Remote Extension
Protocol: BOTH
Port: 1:65535
IP: 110.111.132.6/255.255.255.255
Action: Accept

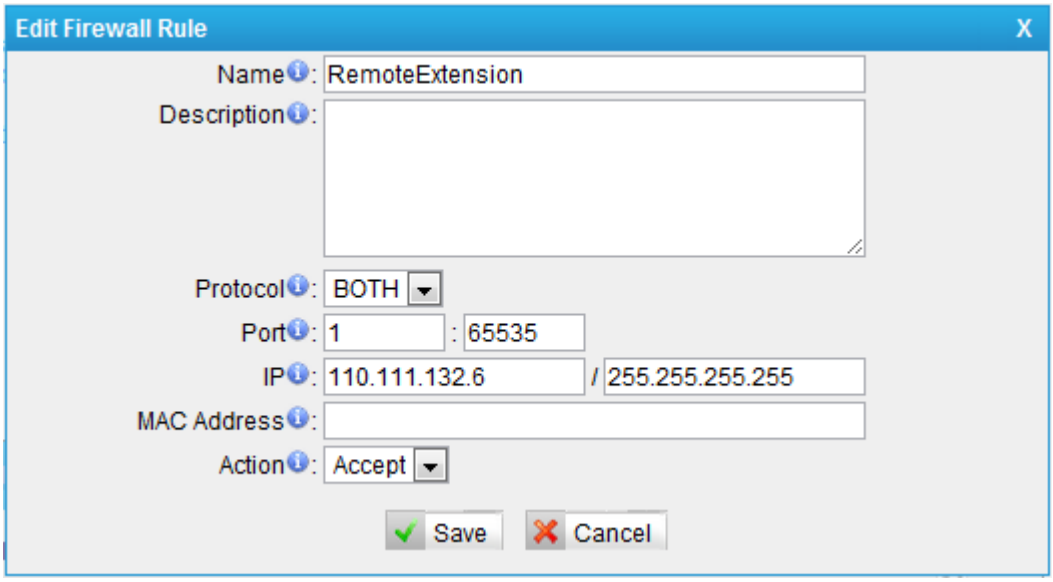

Figure B-14

Step 4. Configure auto blacklist rules

Auto blacklist rules: the Server would add the IP address to the blacklist automatically if the number of the packets it sends exceed the rule you configured.
Add two auto blacklist rules for port: 5060.
Rule No.1:
Port: 5060
Protocol: UDP
IP Packets: 120
Time Interval: 60 seconds

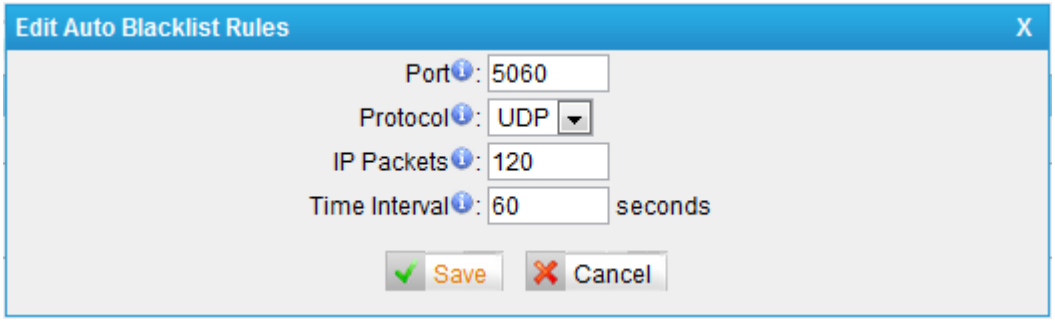

Figure B-15

Rule No.2:

Port: 5060

Protocol: UDP

IP Packets: 40

Time Interval: 2 seconds

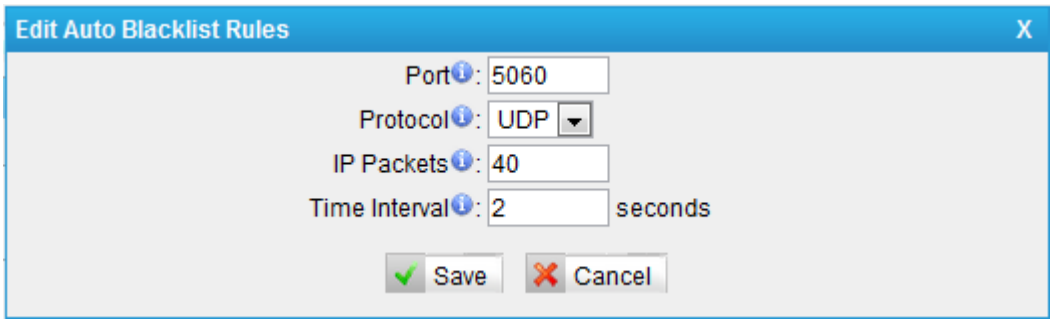

Figure B-16

Add an auto blacklist rule for Port:8022

Rule No.3

Port: 8022

Protocol: TCP

IP Packets: 5

Time Interval: 60 seconds

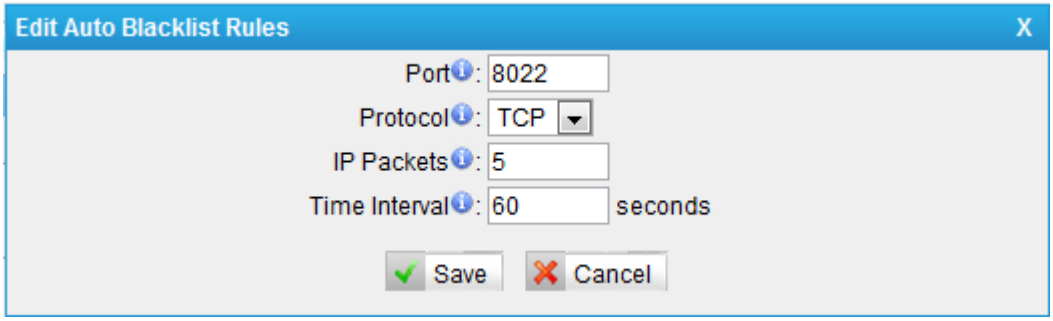

Figure B-17

Step 5. Add a Firewall Rule for VoIP trunk registration

Note: If there is no VoIP trunk, this rule is not required. And if the RTP IP address of VoIP trunk and Registration IP address of the VoIP trunk are different, we need create a rule to accept the RTP IP address too.

Add a rule to accept the IP address of the VoIP trunk to access MyPBX server. For example: If the IP address of the VoIP trunk is 110.5.14.6, Protocol is UDP and Port is 5060, the configuration could be as below:

Name: VoIPTrunk

Protocol: UDP
Port: 5060: 5060
IP: 110.5.14.6/255.255.255.255
Action: Accept

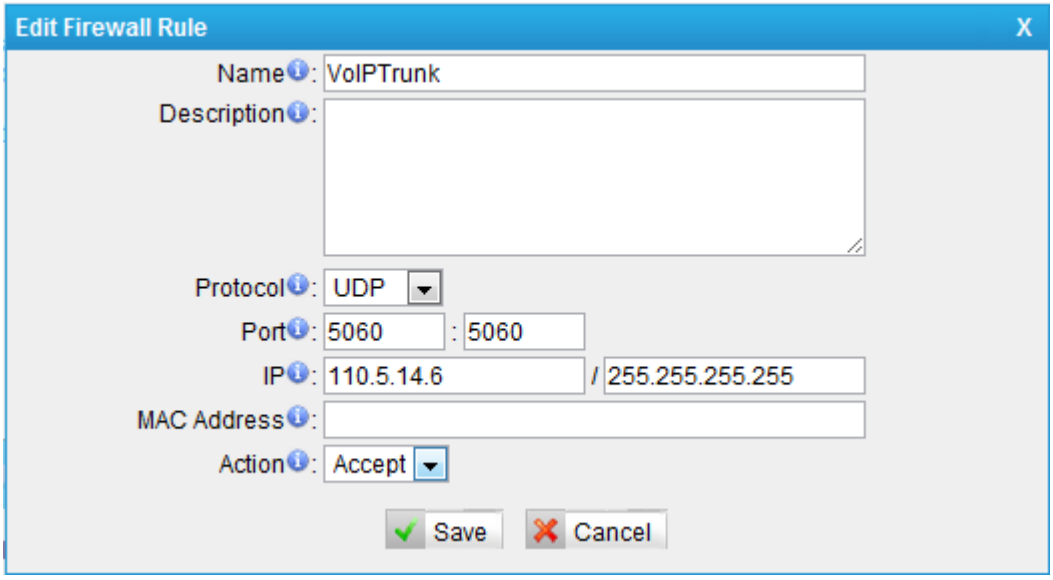

Figure B-18

Step 6. Add a firewall rule to accept the remote access of HTTP port. For example, if the remote access IP is 110.5.14.6, and the port is 80, the configuration could be as below.

Name: RemoteHTTP
Protocol: TCP
Port: 80:80
IP: 110.5.14.6/255.255.255.255
Action: Accept

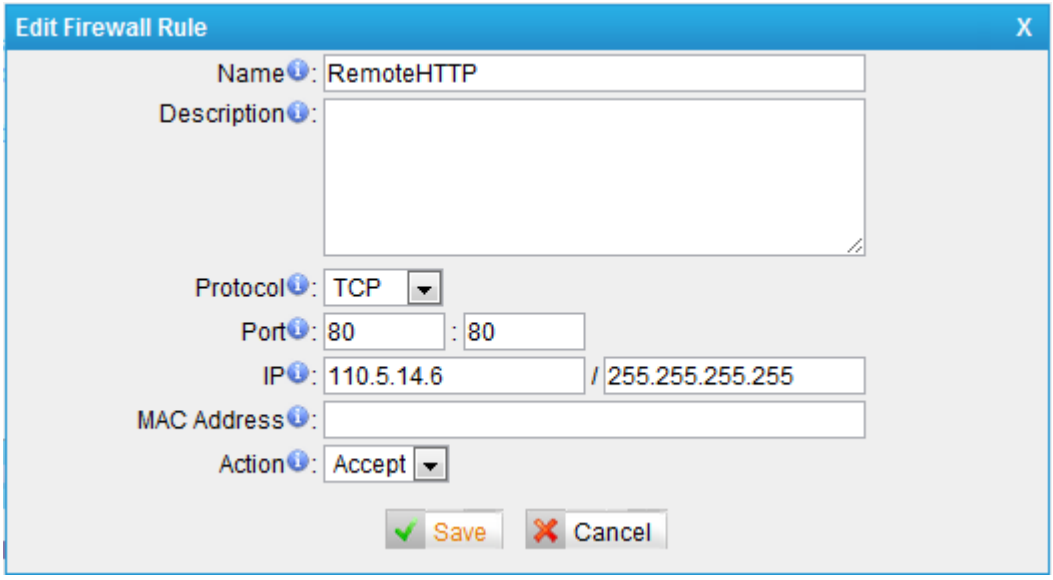

Figure B-19

Step 7. Add a firewall rule to accept remote access of SSH port. For example: if the remote access IP is 110.5.14.6 and the port is 8022.

Note: If the remote access of SSH port is not needed, this rule is not required.

Name: RemoteSSH
Protocol: TCP
Port: 8022:8022
IP: 110.5.14.6/255.255.255.255
Action: Accept

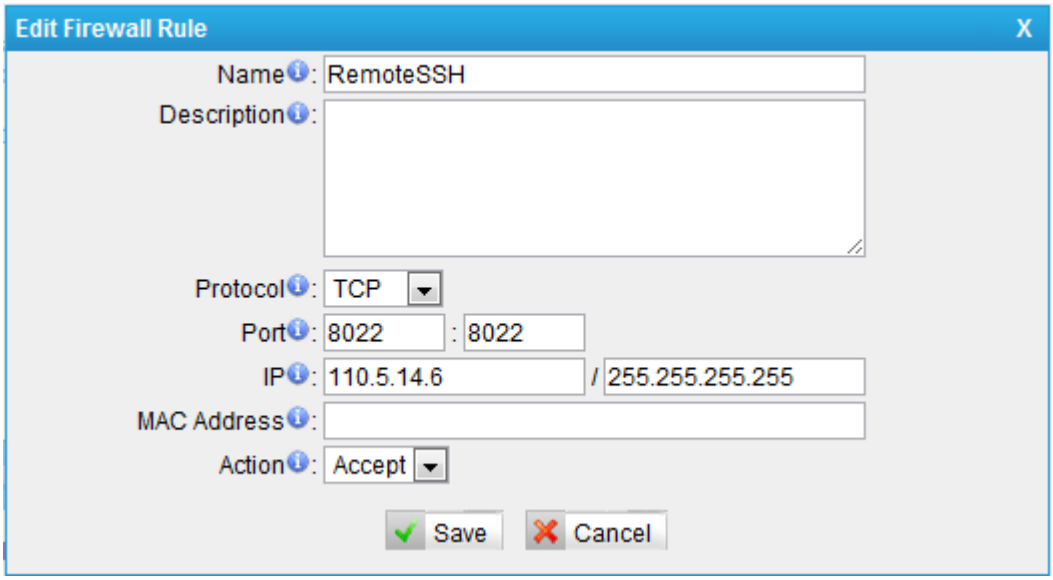

Figure B-20

Step 8. Add other firewall rules by yourself. For example, if you are using features about email, you should add the firewall rules for the SMTP server and POP3 server.

Step 9. Enable Drop all (If this feature is enabled, all the packets and connection that do not match the rules would be dropped.)

Note: Before enable this feature, please add a rule to accept the local network access, or the server might not be accessed.

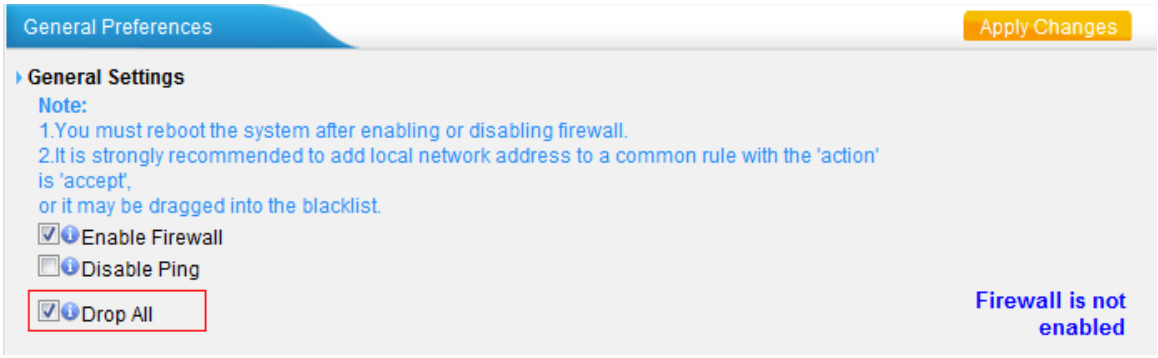

Figure B-21

Step 10. The Configuration of firewall settings is completed. See as below figure.

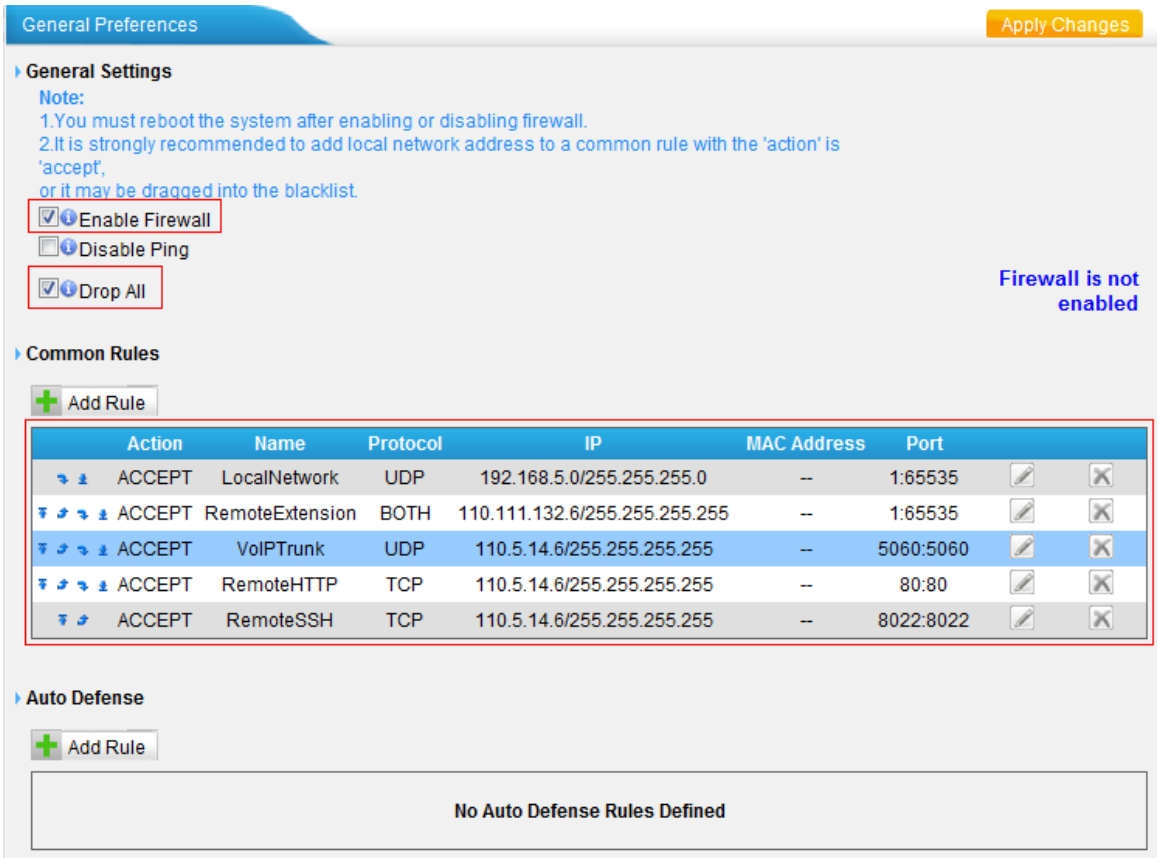

Figure B-22

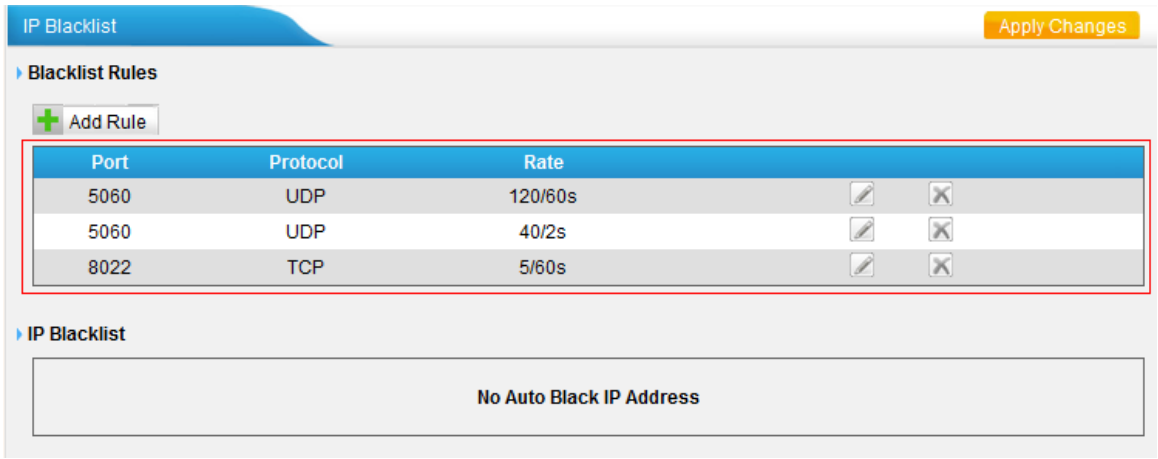

Figure B-23

Step 11. Define the authorized data transmitting rate and drop all other unauthorized hosts.

Note: If we setup IP blacklist rules here, those unauthorized hosts will still be able to send SIP packets into MyPBX if the packets transmitting rate is under the rate defined. But as soon as the

transmitting beyond the define rate, the IP will be added into blacklist automatically.
This is useful for remote extension who is using dynamic IP address.

Remove all the IP blacklist rules if you don't allowed any other unauthorized hosts access MyPBX. See as below figure.
Note: If 'drop all' is not enabled, please don't remove the IP blacklist rules in case the system security hole.

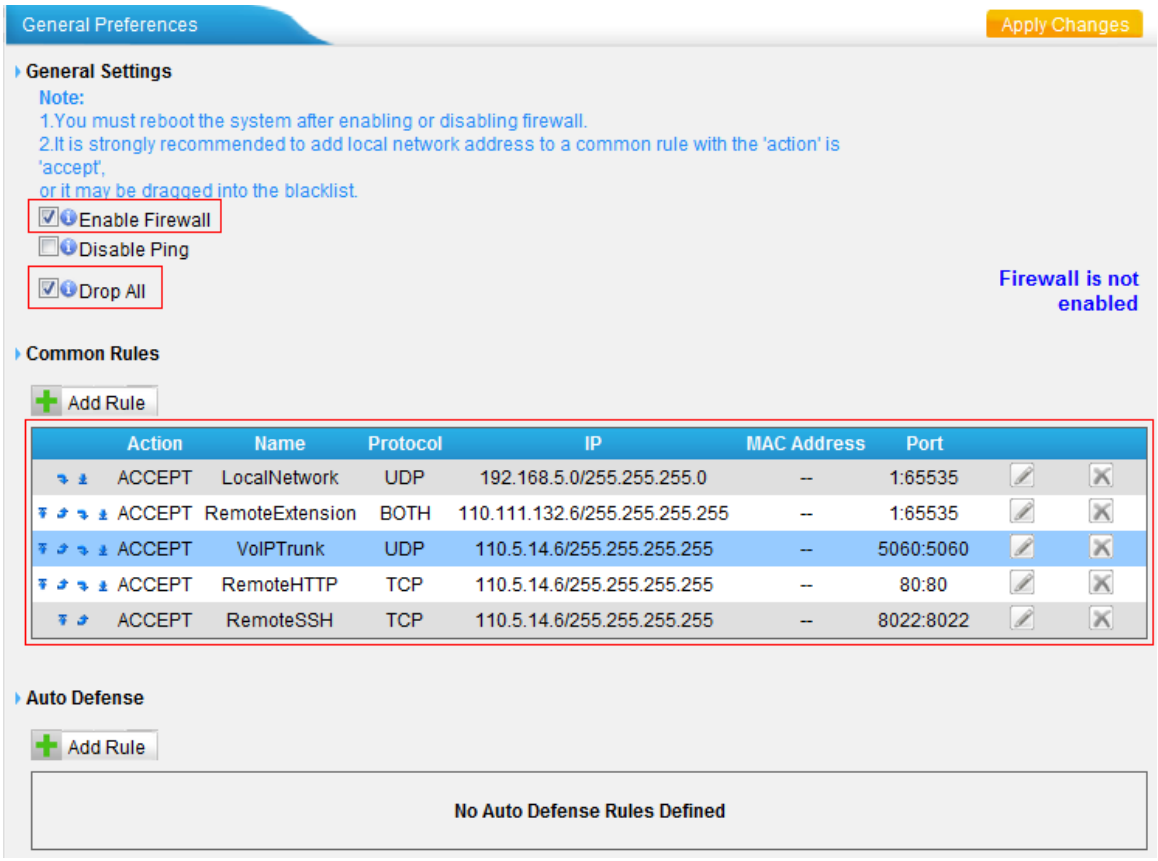

Figure B-24

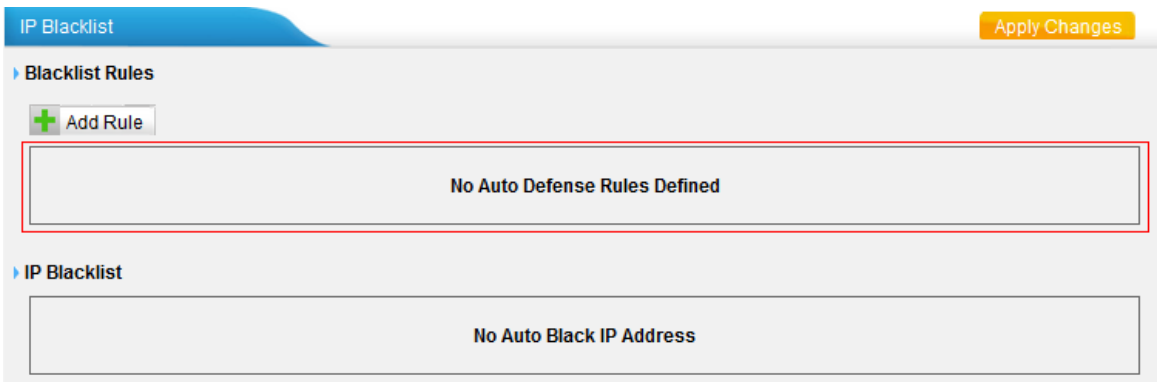

Figure B-25

5*. Alert Settings

After enabling alert settings', if the device is attacked, the system will notify users the alert via call or e-mail. The attack modes include IP attack and Web Login.

5.1 IPATTACK

When the system is attacked by some IP addresses, the firewall will add the IP to auto IP Blacklist and notify the user if it match the protection rule.

Example: Configure to notify extension 500, outbound number 5503301 and E-mail alert@yeastar.com.

configuration could be as below.

Phone Notification Settings:

Phone Notification: Yes
Number: 500;5503301
Attempts: 1
Interval: 60s
Prompt: default

Note: If there's outbound number to notify, the number should be fit with the dial pattern of outbound route.

E-mail Notification Settings:

E-mail Notification: Yes
To: alert@yeastar.com
Subject: IPAttack

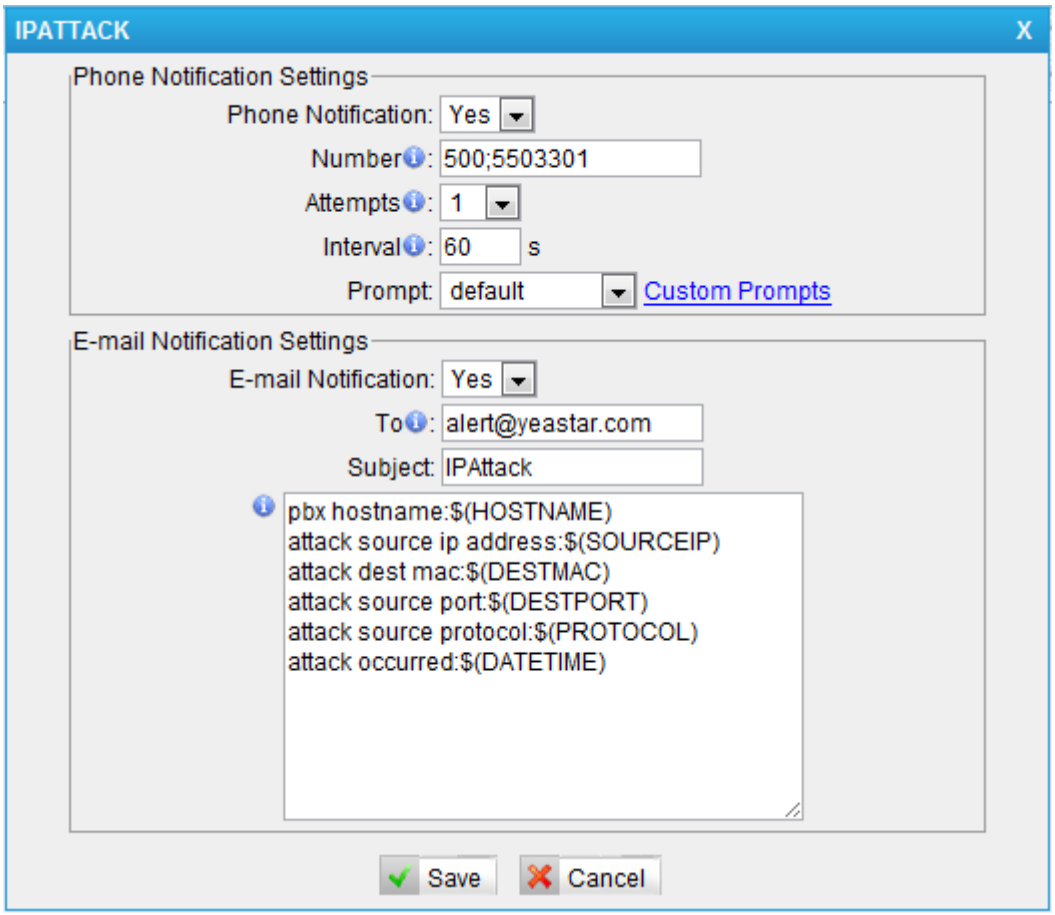

Figure B-26

5.2 WEBLOGIN

Enter the password incorrectly five times when logging in MyPBX Web interface will be deemed as attack, the system will limit the IP login within 10 minutes and notify the user.

Example: Configure to notify extension 500, outbound number 5503301 and E-mail alert@yeastar.com.

configuration could be as below.

Phone Notification Settings:

Phone Notification: Yes

Number: 500;5503301

Attempts: 1

Interval: 60s

Prompt: default

Note: If there's outbound number to notify, the number should be fit with the dial pattern of outbound route.

E-mail Notification Settings:

E-mail Notification: Yes

To: alert@yeastar.com

Subject: WebLogin

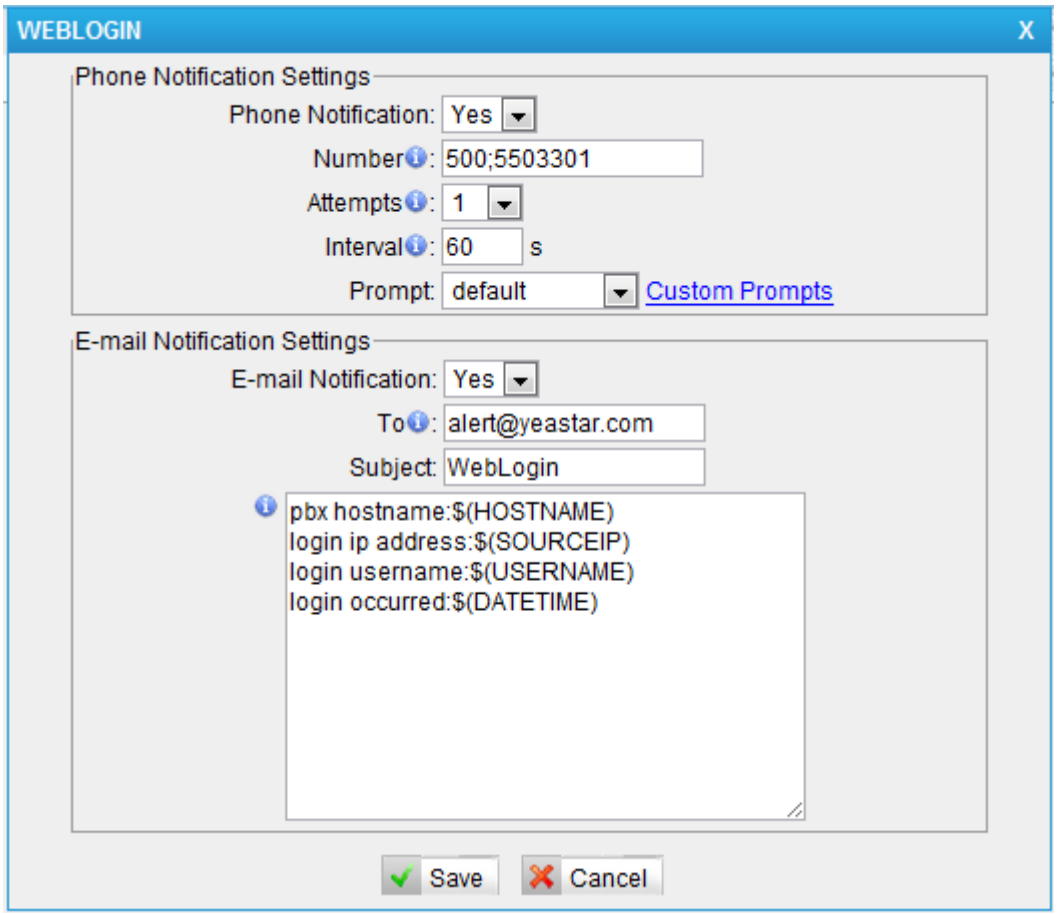

Figure B-27

6. Note

If the phenomena of toll fraud have been happened in your MyPBX system. We are really sorry about that, then please enhance the protection level of your firewall refer to the above steps.

In addition, please change the all password: Web GUI password, SSH password, and all extensions password.

APPENDIX C How to Configure external storage

Before External storage can be properly configured, an SMB share folder accessible from MyPBX must be set up on a Windows based machine. Once that has been set up, please follow the steps below.

Step 1 Add a new folder, rename it, and set this new folder's share Properties according to Figure B-1

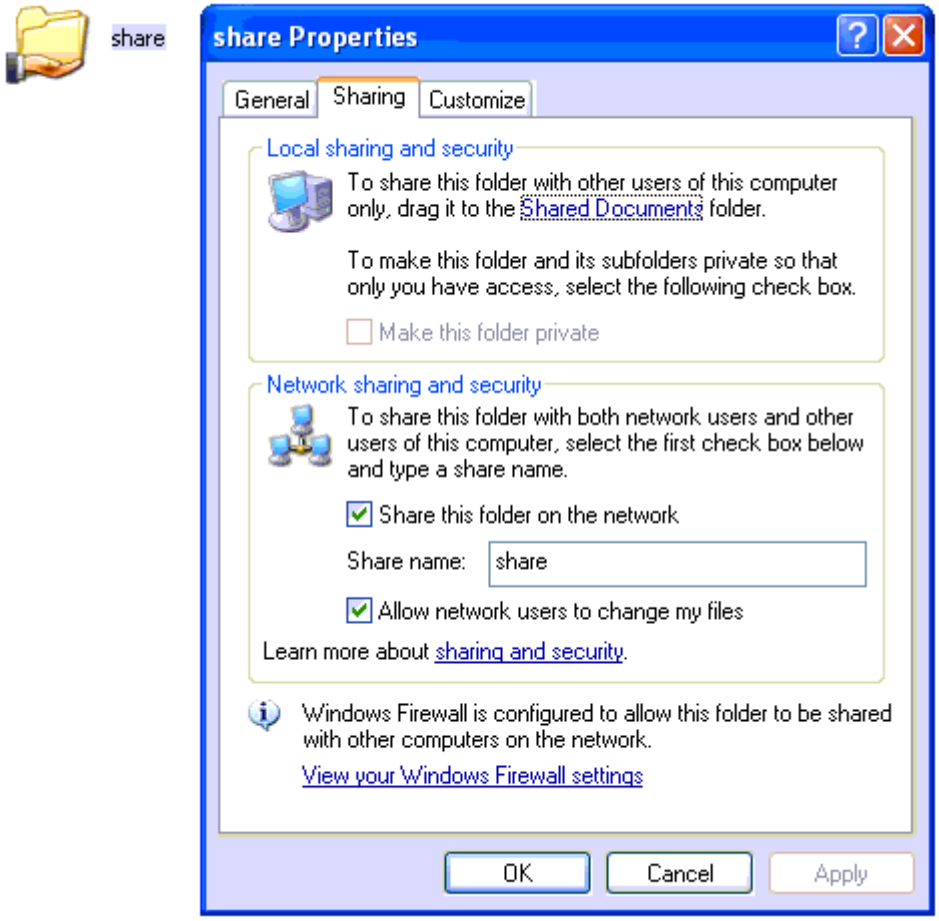

Figure C-1 Set up share Properties

Step 2 Enter the new folder and create a new text file, then rename this file to status.txt. This step is very important, DO NOT forget to create the status.txt file.

Step 3 Configure External storage settings on MyPBX to Figure B-2

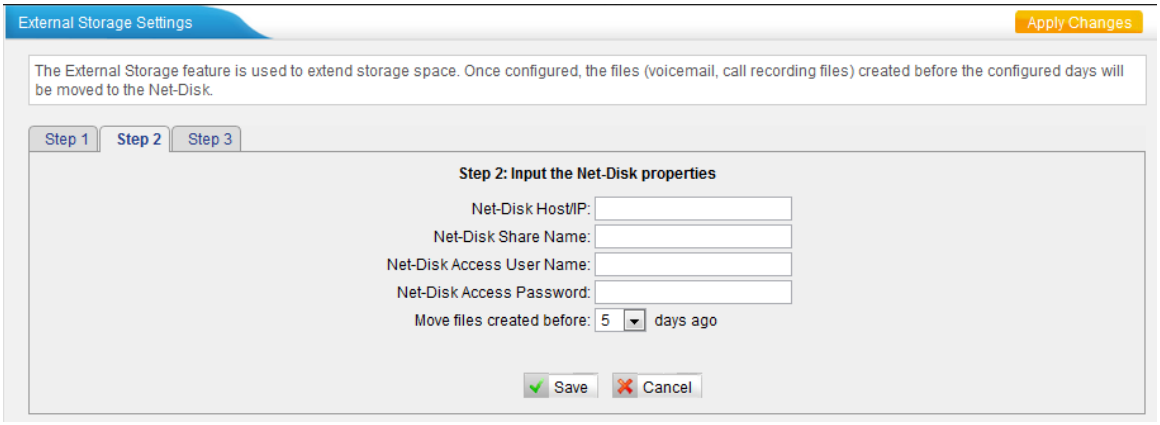

Figure B-2 External storage Setting

Net-Disk Host/IP: Change this to the IP address of the computer where backup files will be stored.

Net-Disk Share Name: Change this to the name of the shared folder where backups will be stored.

Net-Disk Share Username: The user name used to log into the network share. Leave this blank if it is not required

Net-Disk Share Password: The password used to log into the network share. Leave this blank if it is not required

If configuring is correctly, open your Windows share folder to see if the MyPBX backup files and folders has been created. If the contents of the backup folder look similar to Figure B-3, then you have successfully configured External storage on the MyPBX unit.

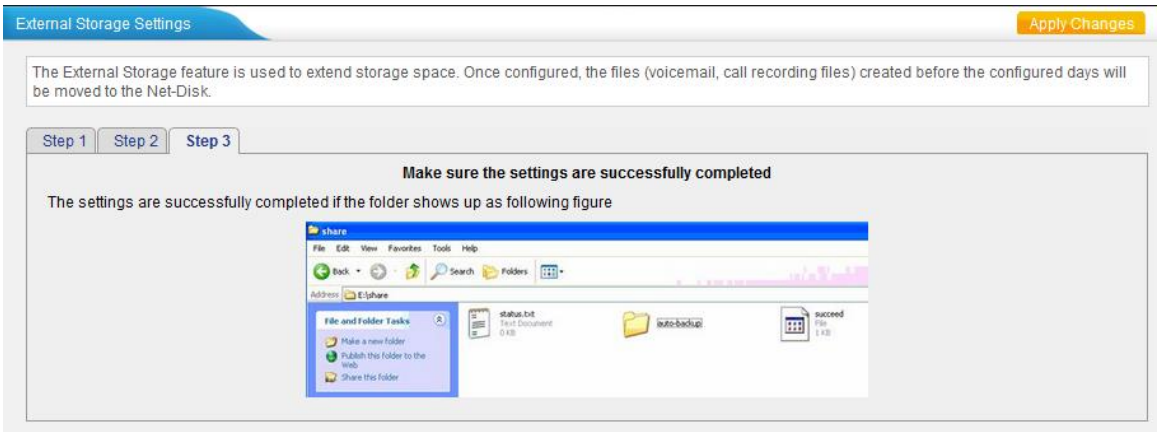

Figure C-3 External storage setting succeed

APPENDIX D How to Configure NAT setting

When MyPBX is behind a NAT(firewall),you need to configure NAT setting on MyPBX if you want to use a remote extension.
Please follow section **1** or **2** below depending on your network configuration.
1. If MyPBX is connected to a local network, you must set up port forwarding on your router. Specifically, you must map port 5060 (default SIP port) and port 10001-10200 (default RTP port range) as UDP ports.

Next, go to the MyPBX web interface and configure the SIP settings according to Figure C-1:
External IP Address: your router's public IP address
External Host: your router's domain
External Refresh Interval: 20 seconds
Local Network Identification:192.168.5.0/255.255.255.0 (change this according to your network configuration)
NAT mode: Yes
Allow RTP Reinvite: No

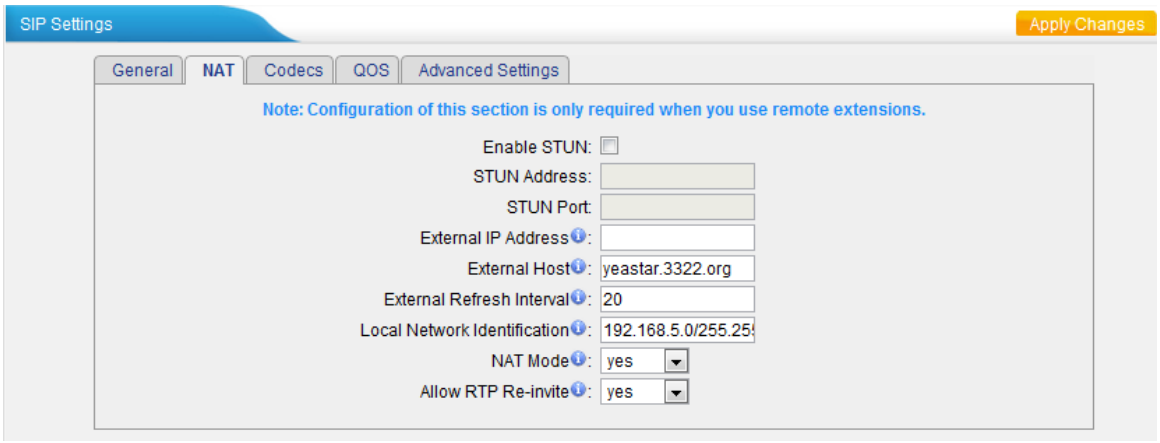

Figure D-1

Assuming that your router's host address is yeastar.3322.org, your local network is from 192.168.5.1-192.168.5.254, and the subnet Mask is 255.255.255.0, the MyPBX network settings should configured like Figure D-2

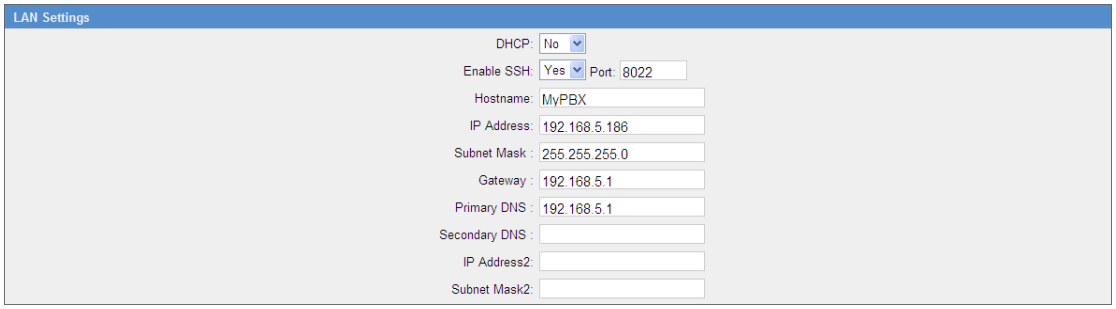

Figure D-2 MyPBX Network setting

2. If MyPBX has a public IP, (i.e. is connected directly to your internet service provider), the network settings should be configured according to Figure C-3:

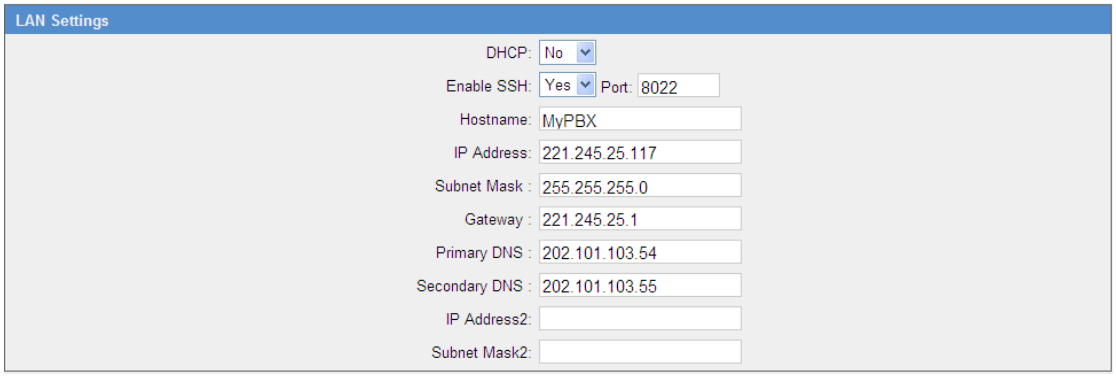

Figure D-3

Next, you should configure the NAT settings according to Figure D-4

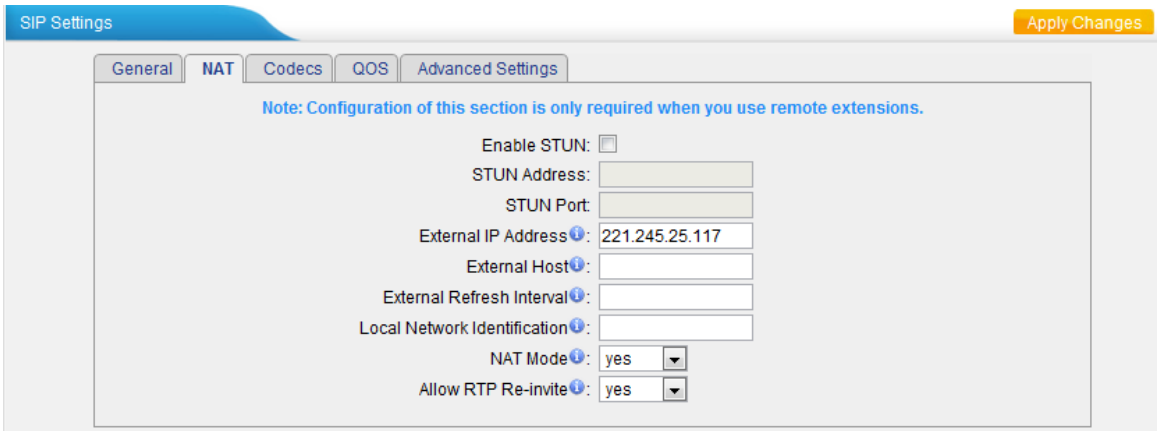

Figure D-4

External IP Address: The public IP address of MyPBX
External Host: Leave this blank if no domain has been configured
External Refresh Interval: Leave this blank
Local Network Identification: Leave this blank
NAT mode: Yes
Allow RTP Reinvite: No

APPENDIX E How to Use Auto Provision

Step1. Disable DHCP Server on your local network.
E.g. Disable DHCP Server on Linksys Router.

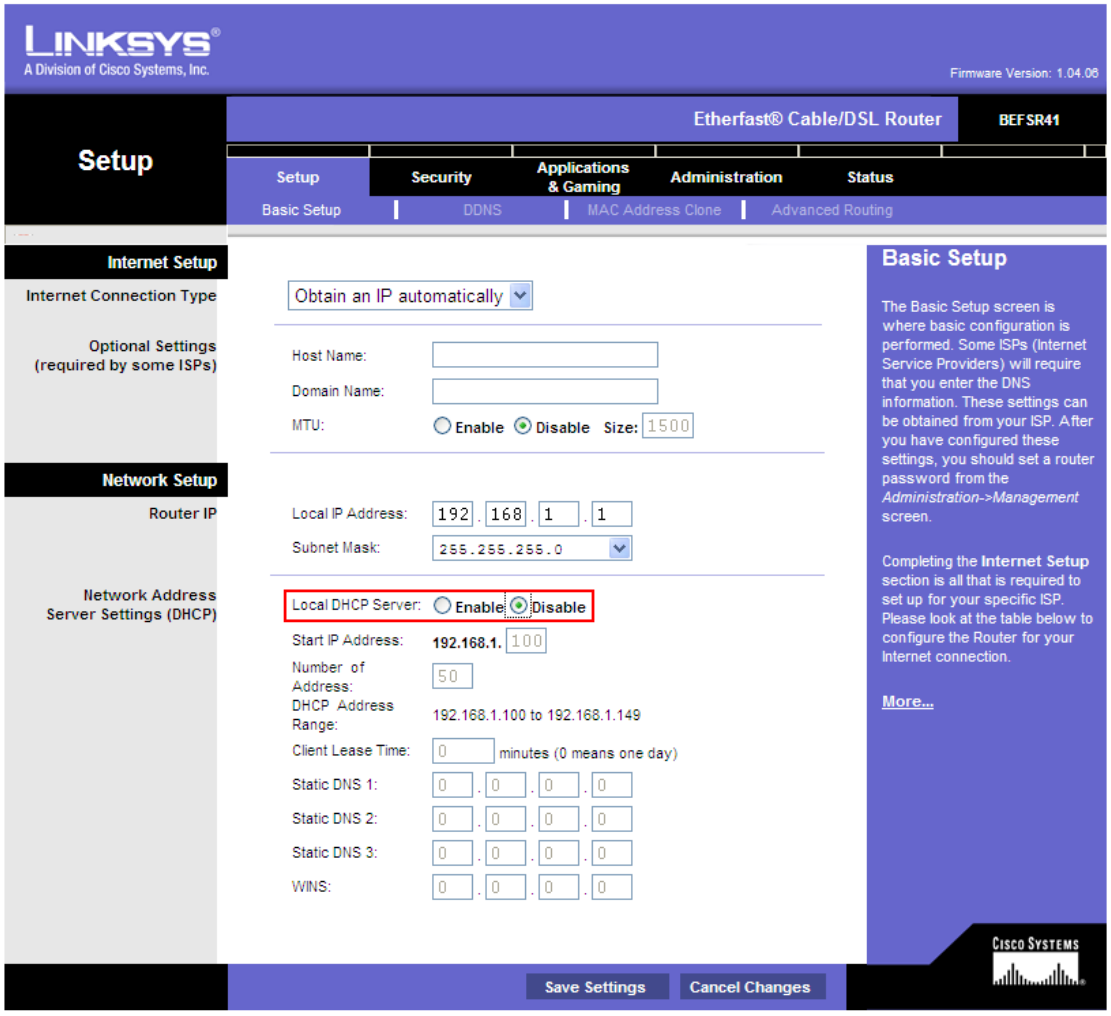

Figure E-1

Step2. Enable DHCP Server on MyPBX.
Login MyPBX web interface, System Settings → DHCP Server → Enable DHCP Server.

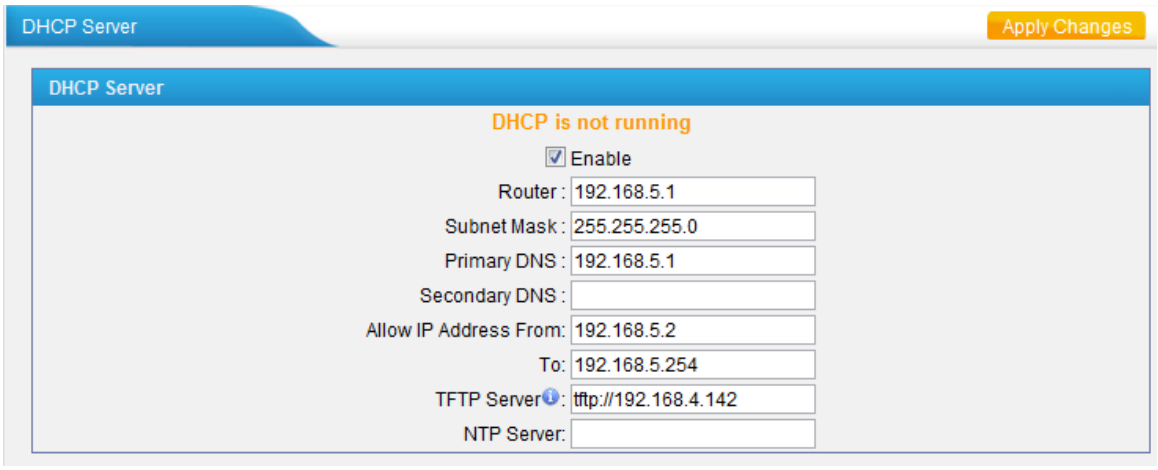

Figure E-2

Step3. Configure phones on MyPBX auto-provision page.
1. Login MyPBX web interface, PBX → Extensions → Phone Provisioning → Add Phone.

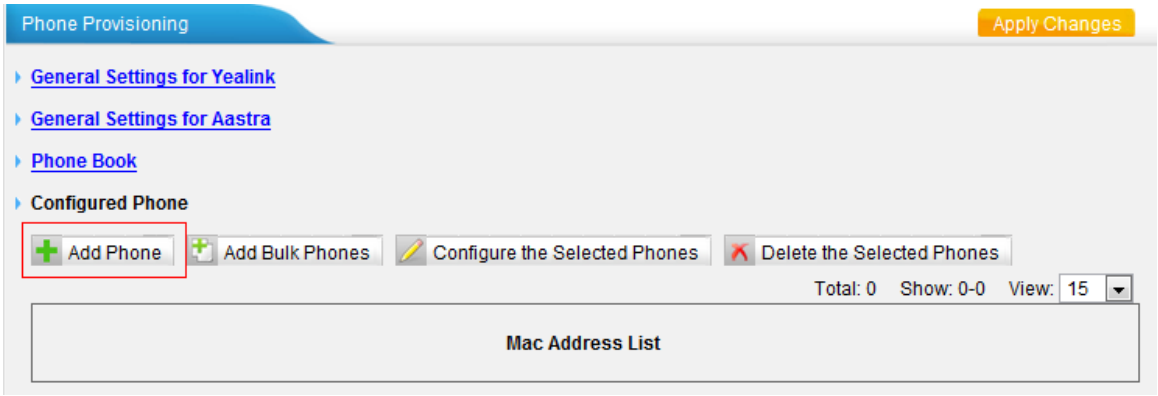

Figure E-3

2. Fill in the phone detail message on the pop-up windows.
Input IP Phone's MAC address, configure Name, Call waiting, Line, Extension, Label, Line active for the phone.

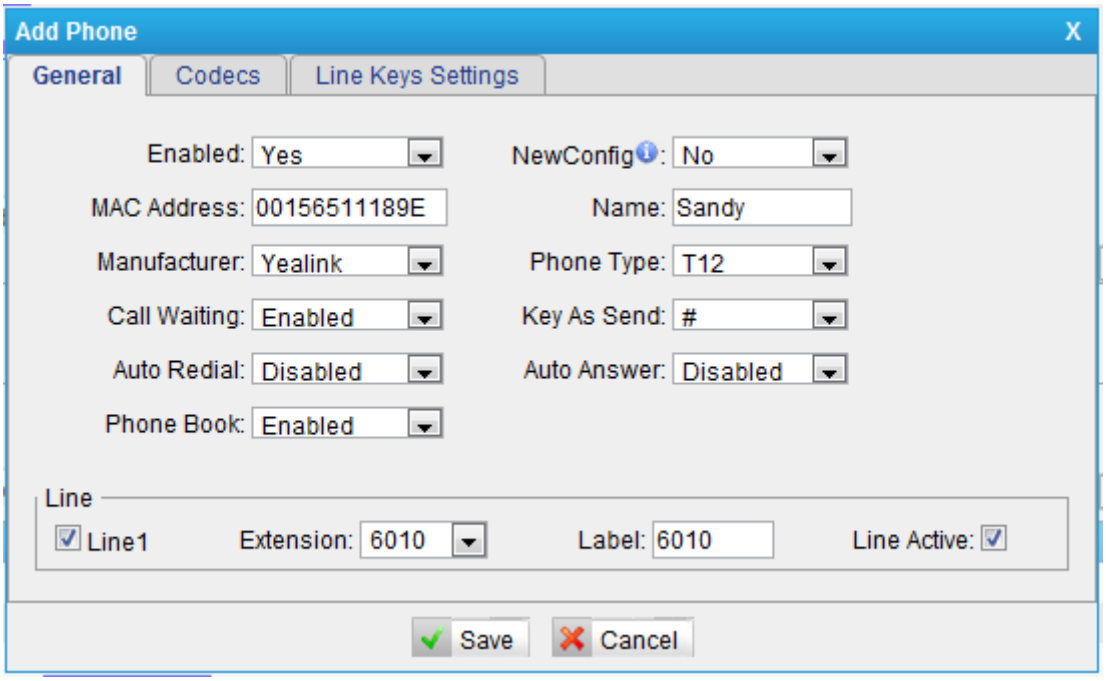

Figure E-4

Step4. Turn on the power and connect the network cable to IP Phone.
Remark: The factory default setting of DHCP for IP Phone is enable, so you can skip this step to step 5.
If the DHCP is disabled, please follow below step to enable it. (e.g.: Yealink's IP Phone).
1. Login IP phone's web page.
2. Enable DHCP.

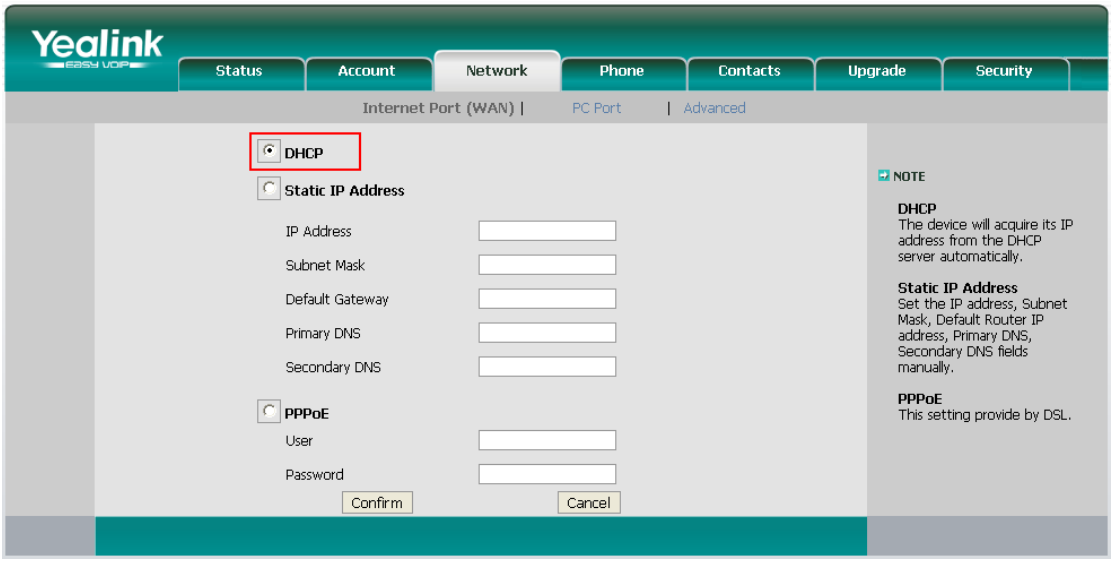

Figure E-5

Step5. Finish.

APPENDIX F How Do I Configure Distinctive Ring Tones

Step1: On your IP phone, navigate to the Phone settings web configuration page and find the Distinctive Ring Tone section.
For each custom ring tone, enter the Internal Ringer Text (can be digits or text) to trigger the ring tone. For example, you may enter "Family".
e.g.: Yealink's IP phone.

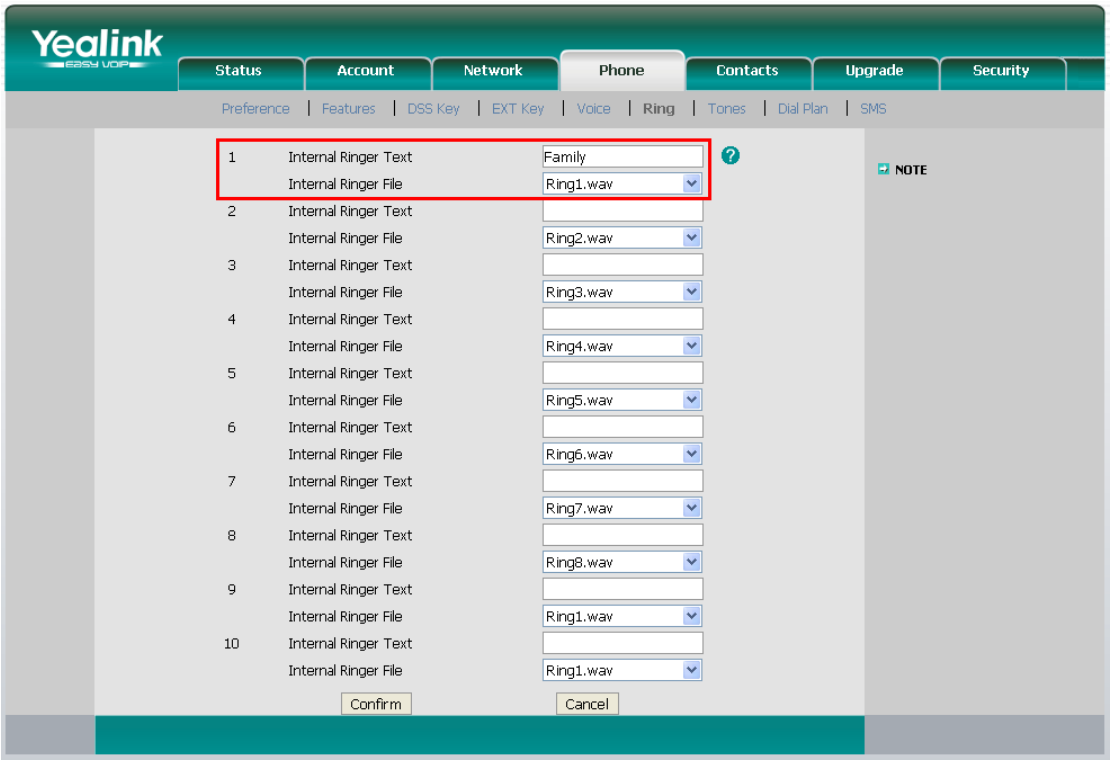

Figure F-1

Step2. Configure the 'Distinctive Ringtone' on MyPBX.
MyPBX web interface, Inbound Routes → Edit Inbound Route, fill in the Internal Ringer Text on 'Distinctive Ringtone'.

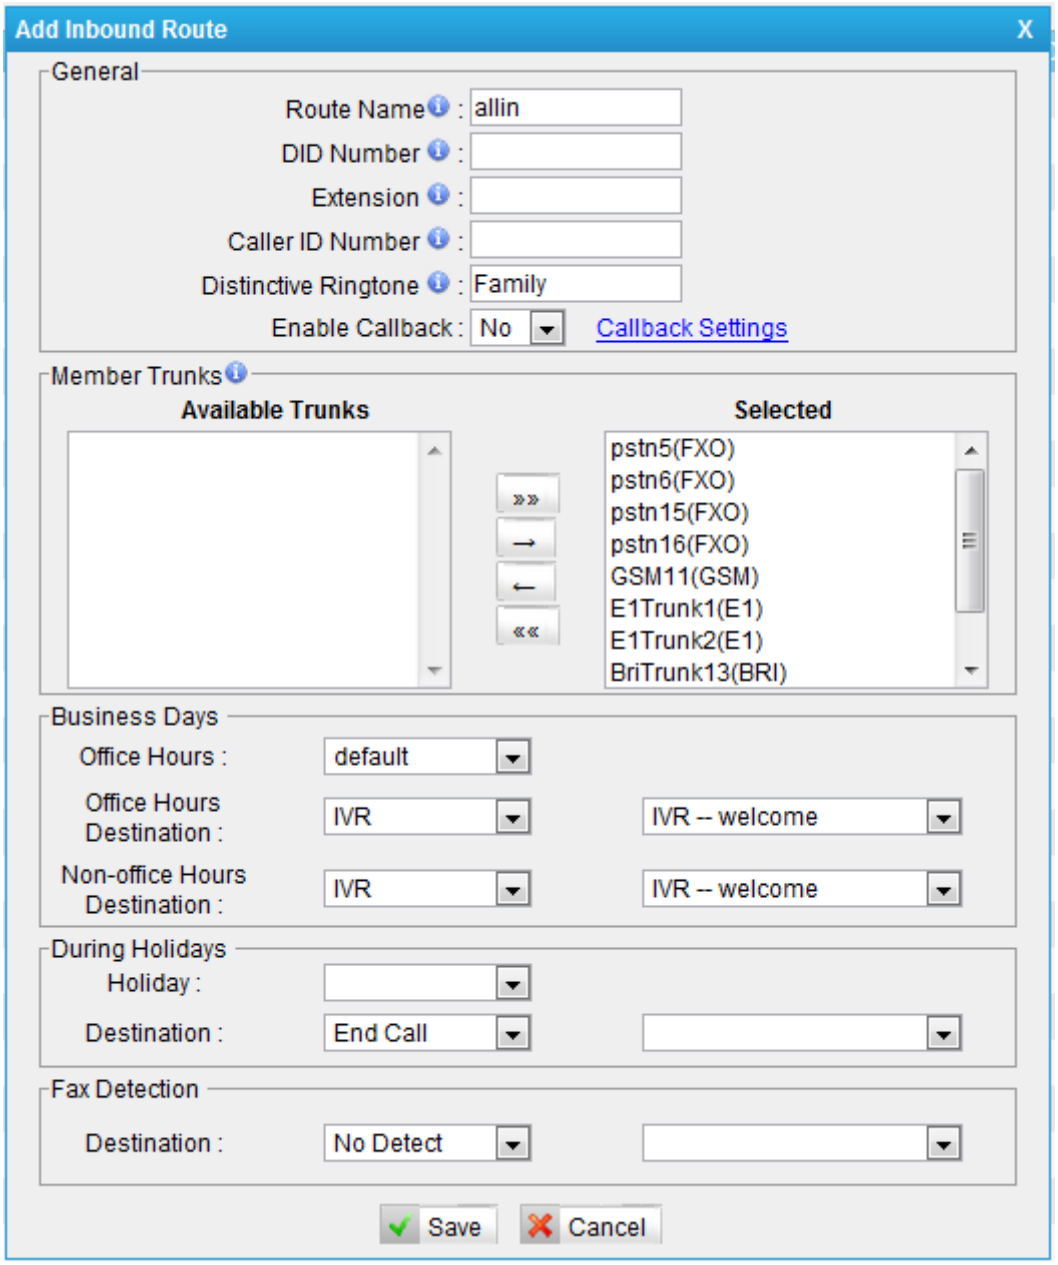

Figure F-2

Step3. Finish.

APPENDIX G How to Use Email to SMS

How to use Email to SMS

You need to send an email to the specified email address (you set in Email Settings. In this case, it is lears@yeastar.com).The content of this email will be sent to the number you want as message. The subject (title) of the email will determine the number. Here are some examples of the formats to the subject of the email.

Example:

1. Send message with no PIN code and default GSM port.

Format: phonenumber

if the subject is "12345678", the text of this email("Welcome to Yeastar!") will be sent to number "12345678" through the first available GSM trunk(No pin code should be set by administrator).

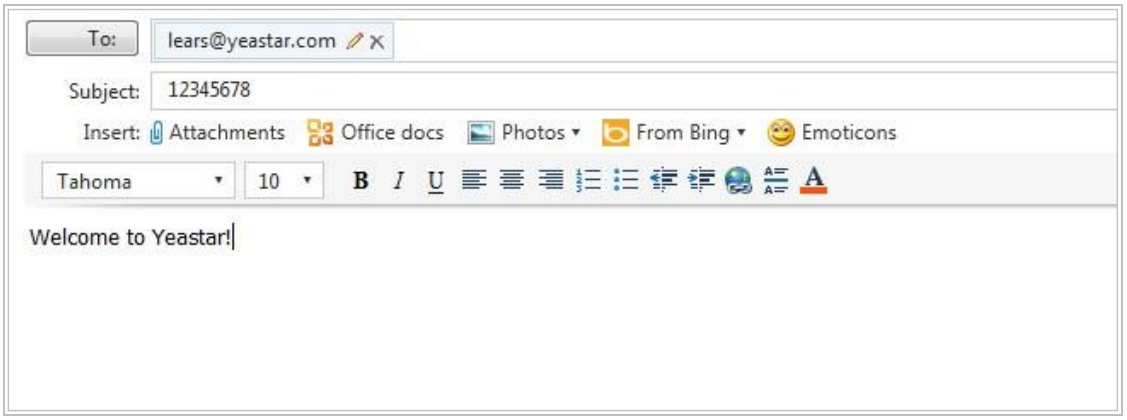

Figure G-1

2. Send message with no PIN code and specified GSM port.

Format: port:portnumber-phonenumber

if the subject is "port:9-12345678", the text of this email ("Welcome to Yeastar!") will be sent to the number "12345678" through GSM trunk 9 (No pin code should be set by administrator).

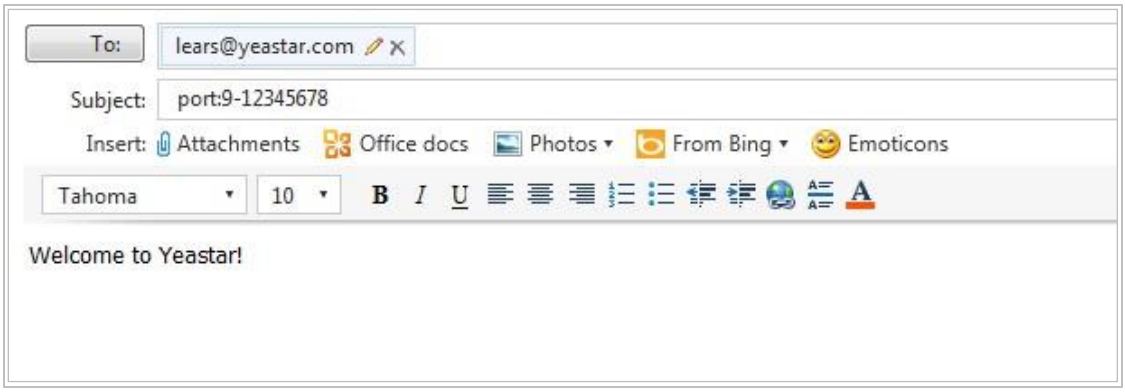

Figure G-2

3. Send message with PIN code and default GSM port.

Format: 500:pincodenumber-phonenumber

if the subject is "500:987-12345678", the text of this email("Welcome to Yeastar!") will be sent to number "12345678" through the first available GSM trunk("987" is the pin code set by administrator).

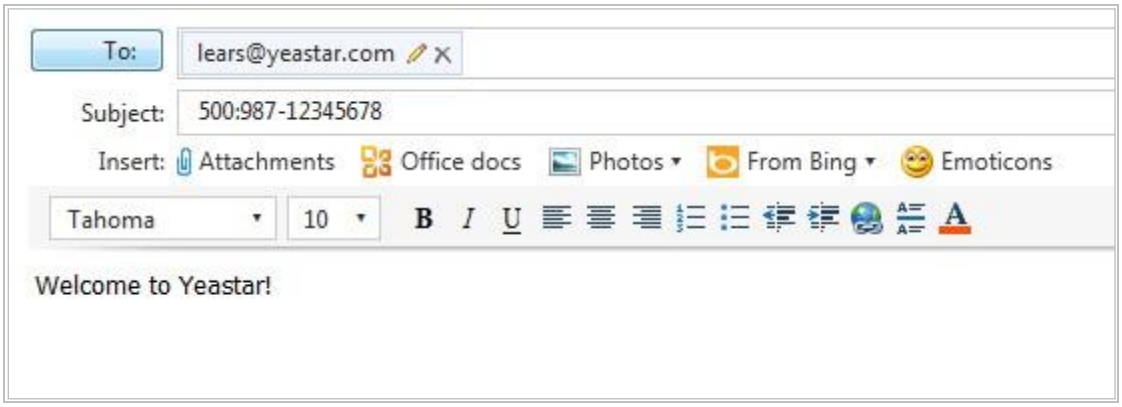

Figure G-3

4. Send message with PIN code and specified GSM port.

Format: 500:pincodenumber-port:portnumber-phonenumber

if the subject is "500:987-port:9-12345678", the text of this email("Welcome to Yeastar!") will be sent to number "12345678" through GSM trunk 9("987" is the pin code set by administrator).

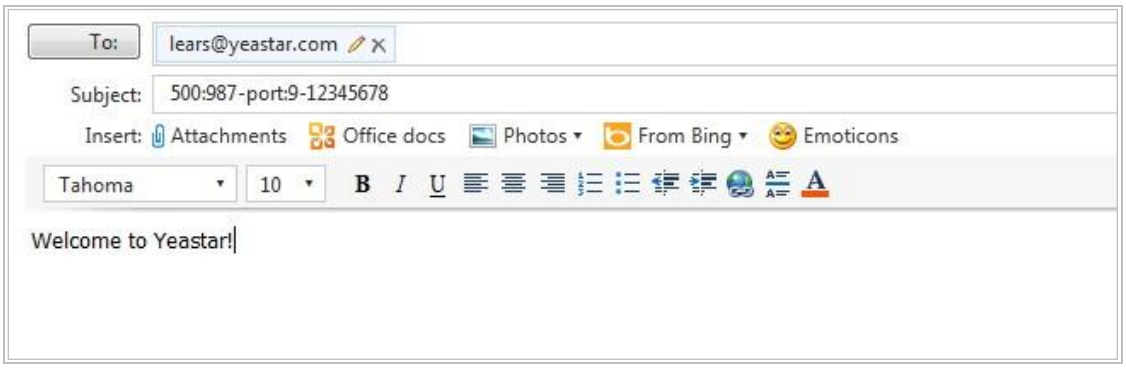

Figure G-4

APPENDIX H How to Use DID

Direct inward dialing (DID), also called direct dial-in (DDI) in Europe and Oceania, is a feature offered by telephone companies for use with their customers' private branch exchange (PBX) systems. In DID service the telephone company provides one or more trunk lines to the customer for connection to the customer's PBX and allocates a range of telephone numbers to this line (or group of lines) and forwards all calls to such numbers via the trunk.

MyPBX support DID, you can configure DID in inbound route. Related settings: **DID Number, Extension, Destination.**

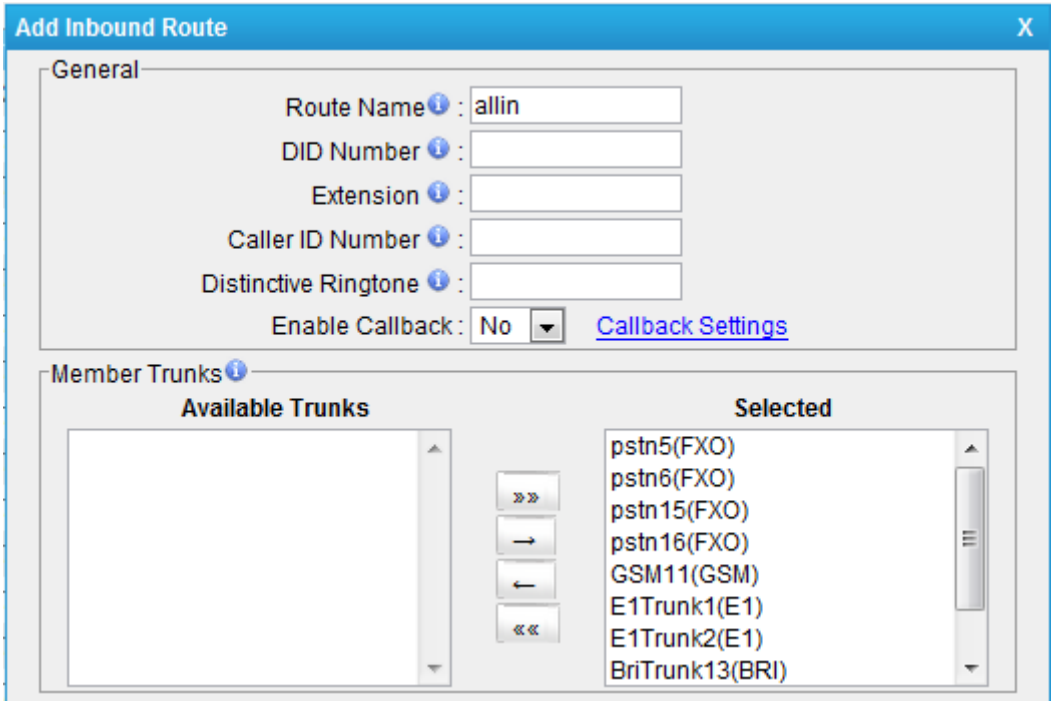

Figure H-1

·DID Number

Define the expected DID Number if this trunk passes DID on incoming calls. Leave this field blank to match calls with any or no DID info. Only service provider, E1 trunks, BRI trunks or SIP trunks need to be configured with this setting.

You can also use pattern matching to match a range of numbers. The following patterns may be used:

X: Any Digit from 0-9

Z: Any Digit from 1-9

N: Any Digit from 2-9

[12345-9] : Any digit in the brackets (in this example, 1,2,3,4,5,6,7,8,9)
The '**.**' Character will match any remaining digits. For example, 9011. will match any phone number that starts with 9011, excluding 9011 itself.
The '**!**' will match none remaining digits, and causes the matching process to complete as soon as it can be determined that no other matches are possible.

·Extension
Define the extension for DID number, this field only valid when use E1 trunk for this inbound router. You can only input number and '-' in this field, and the format can be xxx or xxx-xxx. The count of the number must be only one or equal the count of the DID number.

·Destination
If you don't set the extension, you can set the destination of the call here.

Example 1:
Step1: You set the DID number (5503XXX in this example).
Step2: You choose the destination (Ring Group in this example).

The configuration of this example means when the incoming call with DID number 5503XXX (7 digits number start with 5503) will go to the destination Ring Group.

If you choose the destination, please leave the Extension form blank.

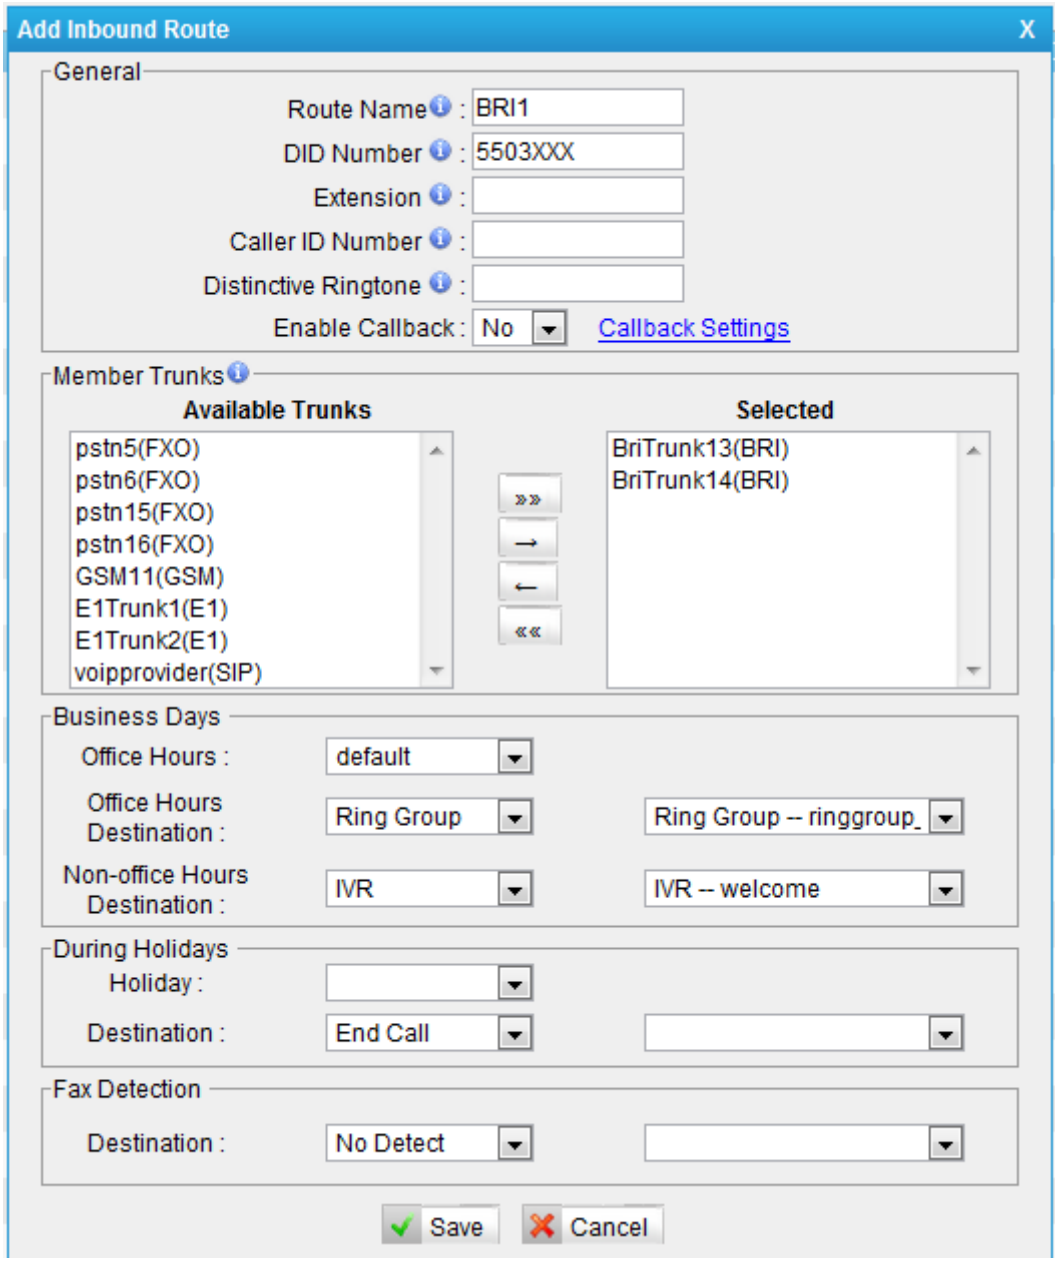

Figure H-2

Example 2:
Step1: You set the DID number (6001-6099 in this example).
Step2: You set the Extension (6001-6099 in this example).

The configuration of this example means when the incoming call with DID number 6001 to 6099 will go to the destination 6001 to 6099(number 6001 to extension 6001, number 6002 to extension 6002).

The destination you set below will be disabled if you set the Extension.

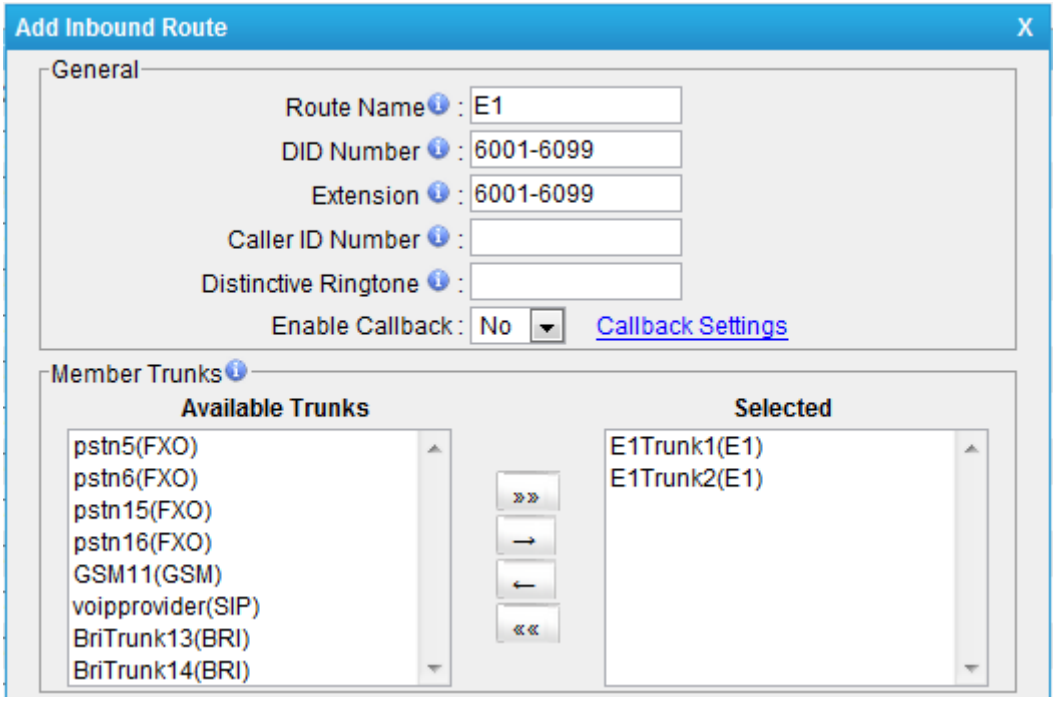
Add Inbound Route
X
General
Route Name : E1
DID Number : 6001-6099
Extension : 6001-6099
Caller ID Number :
Distinctive Ringtone :
Enable Callback : No
Callback Settings
Member Trunks
Available Trunks
pstn5(FXO)
pstn6(FXO)
pstn15(FXO)
pstn16(FXO)
GSM11(GSM)
voipprovider(SIP)
BriTrunk13(BRI)
BriTrunk14(BRI)
»
→
←
«
Selected
E1Trunk1(E1)
E1Trunk2(E1)

Figure H-3

APPENDIX I How to Use BLF Key to Choose the PSTN line

MyPBX allows you to choose the specific PSTN line to make outbound call by pressing the BLF key on the IP Phone.

Follow the steps to do the configuration with your Yealink phone

1. We want to choose pstn1 or pstn2 to call out.

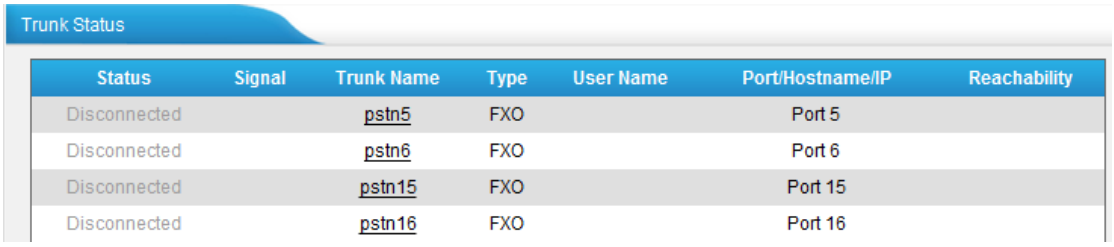

Figure I-1

2. Configure the IP Phone:

Figure I-2

Test

When you press DSS Key 1/2, the phone will connect to pstn1/pstn2 line. If pstn1/pstn2 is not busy, you will hear the dial tone. You can dial the number you want and use this line to call out then.

APPENDIX J How to Enable Auto Recording

MyPBX Enterprise allows you to record the calls automatically. Here is the guide for you to use it.

J.1 Login

From your web browser, input the IP address of the MyPBX server.
Login the system with the monitor account:

User Name: monitor
Password: password

Figure J-1

J.2 Recording Settings

1) General Preferences
Enable this function here. You can tick:
a. Record Inbound calls

b. Record Outbound calls
c. Record Internal calls
d. Record Callback calls.

2) Apply To

·Trunks Recording

When ticked, all calls through the selected trunks will be recorded.

·Extensions Recording

When ticked, all calls made by the selected extensions will be recorded.

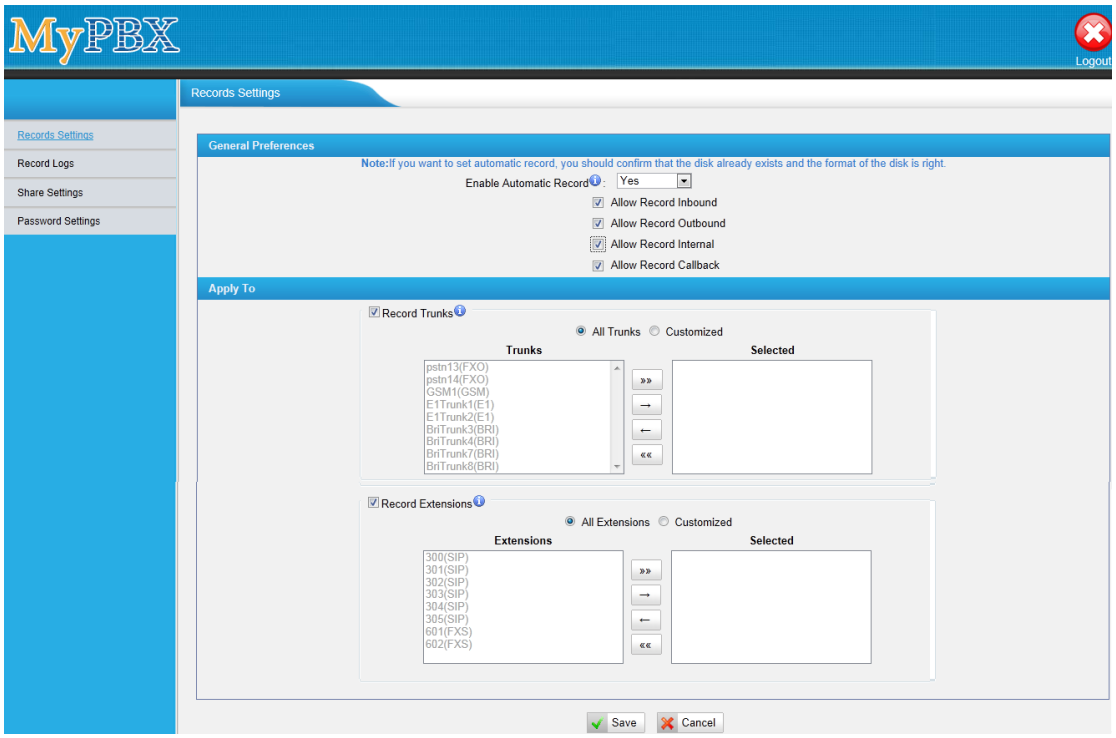

Figure J-2

J.3 Recording Logs

·Start Search

You are able to search the record by Start Date to End Date, Extension, Trunk, Duration and Communication Type.

·The Record List

You can choose the record to download or delete.
You can check the ID, Time, Callee, Caller, Trunk, Duration(second), Communication Type of each record

You can play, download or delete the recording files.

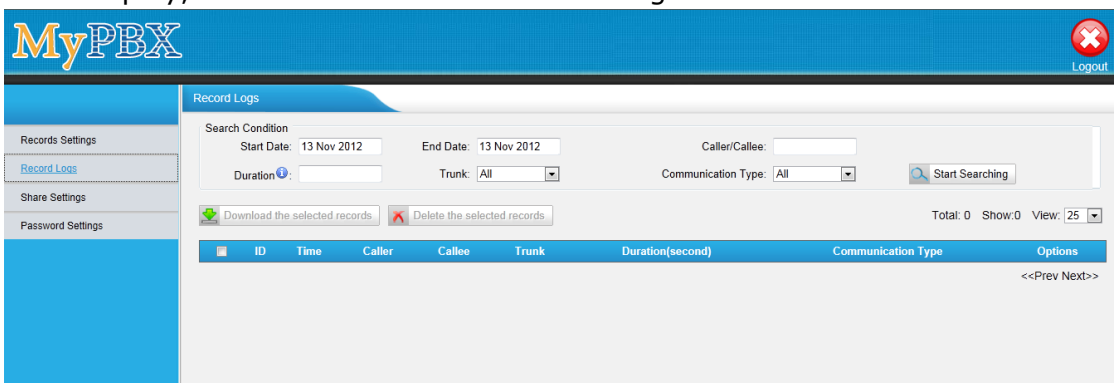

Figure J-3

J.4 Share setting

Use this setting to share the recording file on the network.

·User Name
The user name to check the file

·Password
The password to the user name

·Share Name
The name of the folder showed on the network.

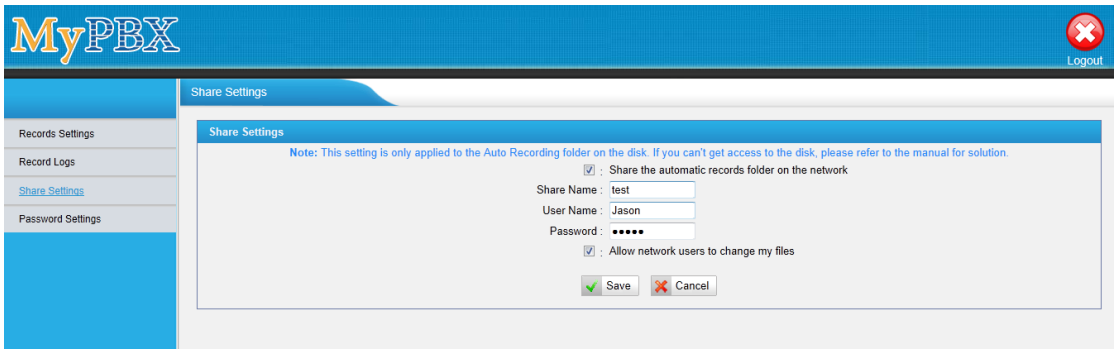

Figure J-4

For WIN 7/Vista user. please modify the registry before checking the shared file :

Step1: Start->Run->regedit
Step2: Modify the value of
"HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Control\Lsa\
LmCompatibilityLevel "
to "1".
If" LmCompatibilityLevel" doesn't exit, create a Dword value
"LmCompatibilityLevel " = 1

You can check the recording file on the network by Explorer/Resource Manager
Run: \\ IP of MyPBX
In the picture below, the IP is 192.168.5.101

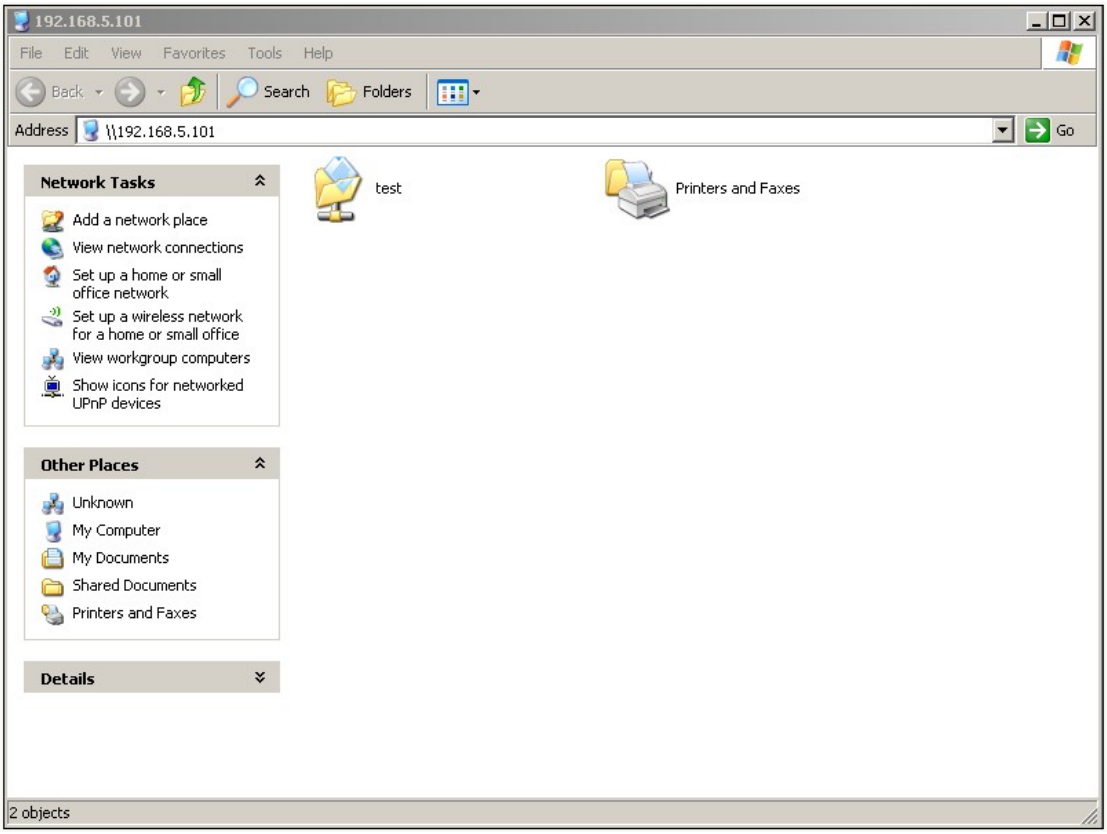

Figure J-5

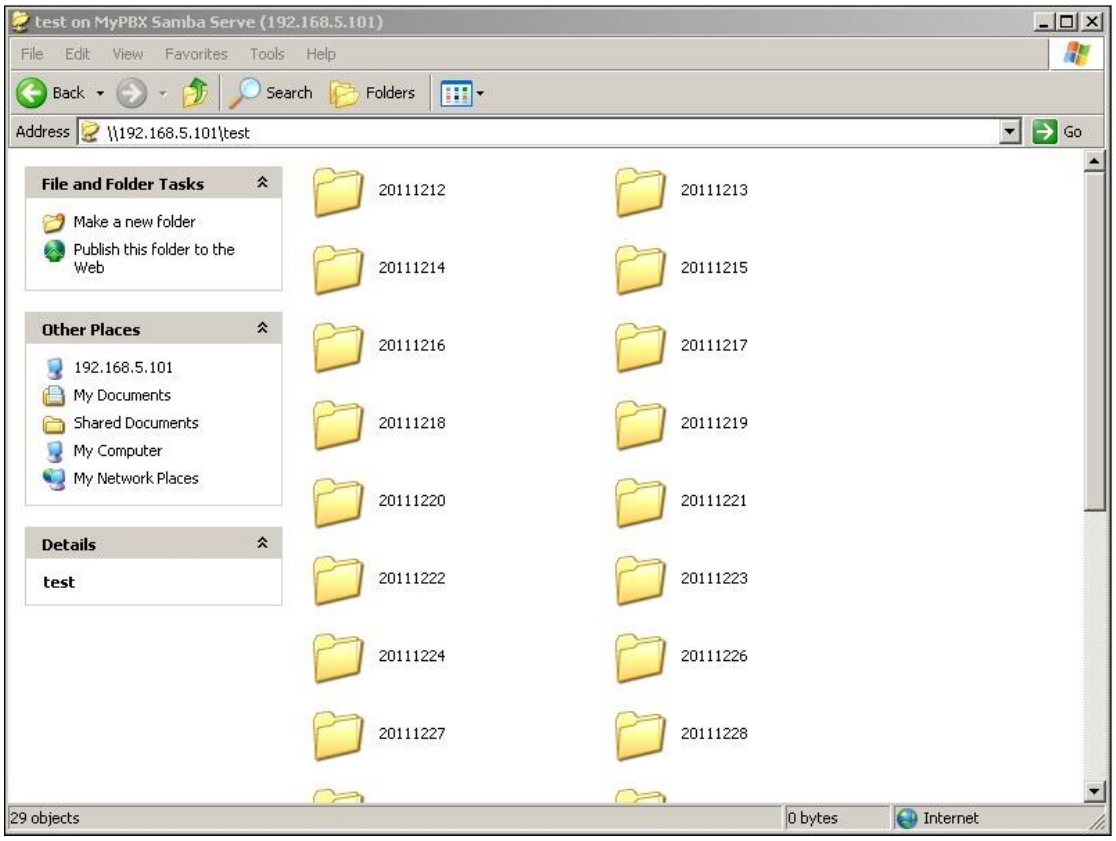

Figure J-6

If you change the password of the share folder, the network users may not be able to check the shared files then.

Please ask the network user to try:
step1: Start-> Run -> cmd
step2: net use * /del (the is a space behind *)
step3: Visit the device again with new password

J.5 Password Setting

You can change the password of the account "monitor" here.

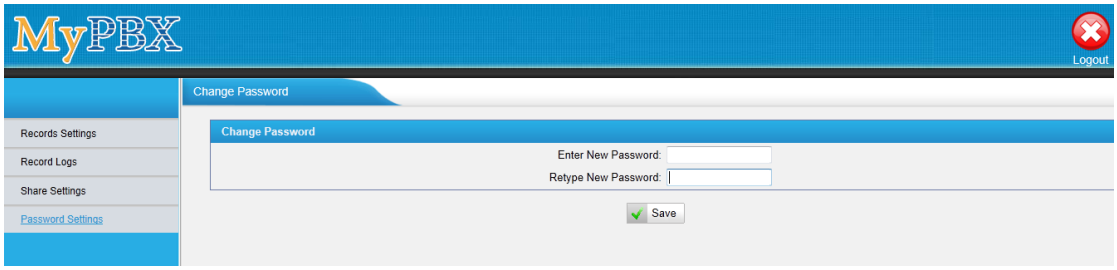

Figure J-7

<Finish>